



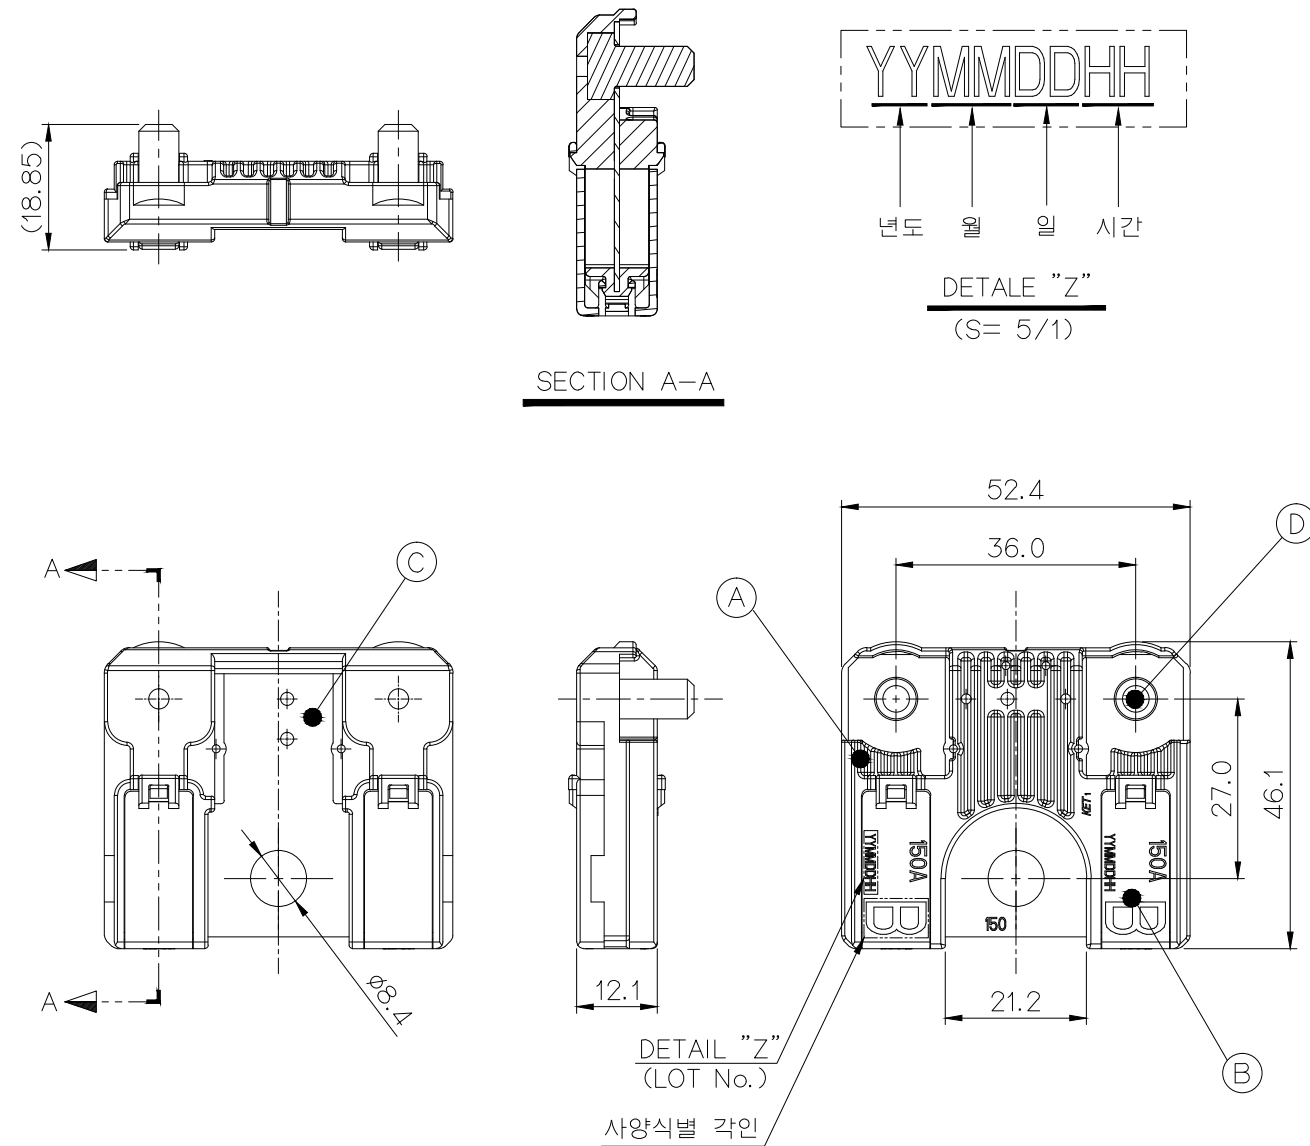

NO.	PART NAME	MATERIAL	COLOR/FINISH
1	BFT 2P MAIN BODY	PA6T-GF35	BLACK
2	BFT 2P ELEMENT COVER	PES	투명 BROWN
3	BFT 2P BUS BAR(150A)	COPPER ALLOY	PRE-TIN
4	M6 BOLT	STEEL	PFZnNi5

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

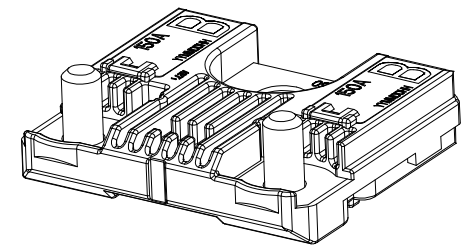

3D VIEW

주 기

1. 기능상 유해한 BURR 및 FLASH 등이 없을것.

2. 아래의 규격을 만족할 것.

1) 일반공차 : ES05206-00(보통치수 허용차-MOLD(2급))

2) 중금속 : MS201-02(자동차 부품 및 재료의 중금속 사용 금지)

3) ES91872-00(전장품 BFT 평가규격)

4) M6 BOLT TORQUE : 0.8Kgf·m - 1.2Kgf·m

NOTE

1. MUST BE FREE OF BURR, WELDLINE

AND IMPERFECTION THAT AFFECT FUNCTION.

2. MUST MEET BELOW SPEC.

1) GENERAL TOLERANCE : ES05206-00 (MOLD PARTS-2ND)

2) HEAVY METAL : MS201-02 (PROHIBITION OF USE OF
HEAVY METAL FOR AUTOMOTIVE PARTS)3) ES91872-00 (THE TEST SPECIFICATION FOR AUTOMOTIVE
BFT)

4) M6 BOLT TORQUE : 0.8Kgf·m - 1.2Kgf·m



ISSUE MARK

				MATERIAL		SEE TABLE	KET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
				FINISH		SEE TABLE	
				WIRE RANGE		—	CLASS FUSE
				INSULATION		—	TYPE BFT 2P
LTR RELEASED		KJK	KMK	BHS	31.JUL.'09	TOLERANCE EXCEPT AS NOTED	PART NO. MG665001
DR. JK KIM 31.JUL.'09		CHK.				PART NAME	BFT 2P ASSEMBLY(150A)
CHK. MK KIM 31.JUL.'09		APP.	HS BAE 31.JUL.'09			SCALE 1/1	