

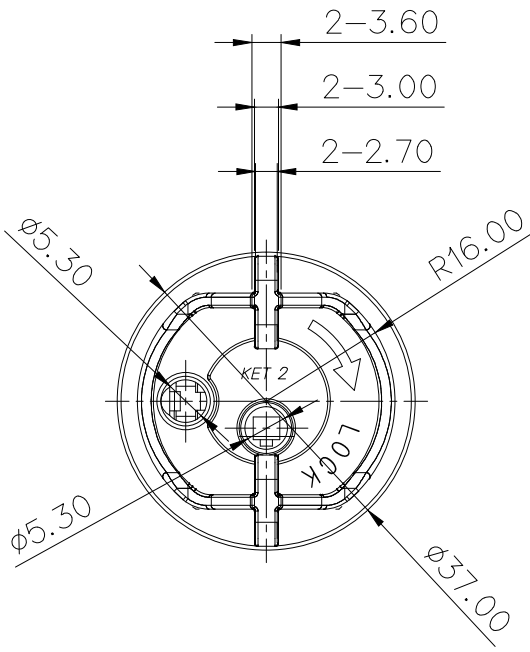
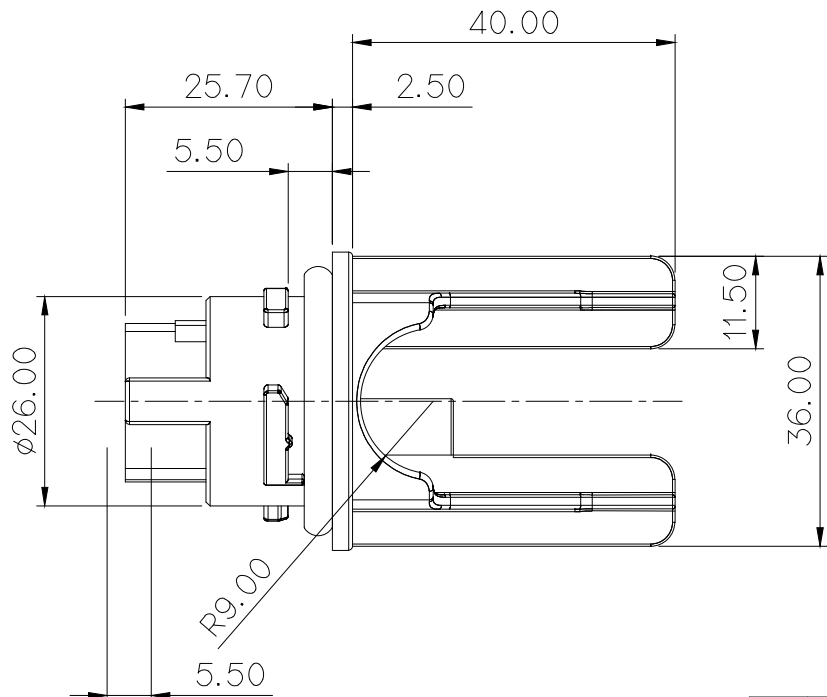
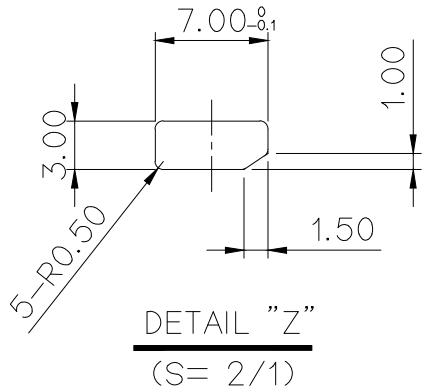
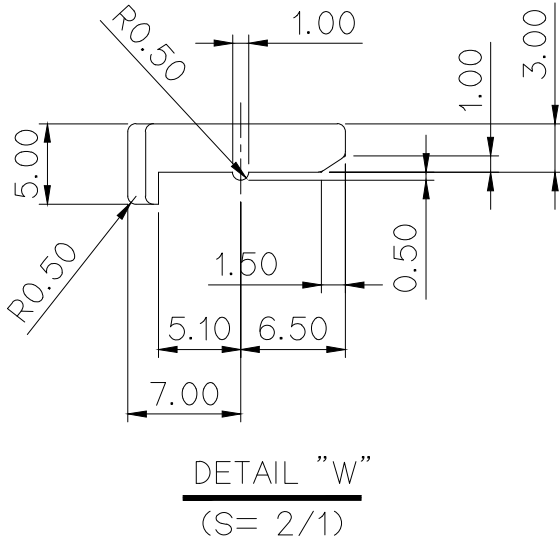
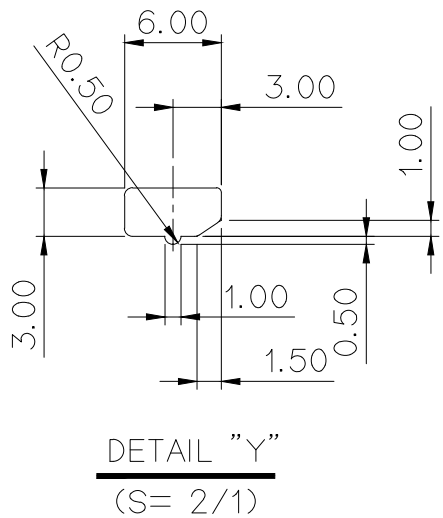
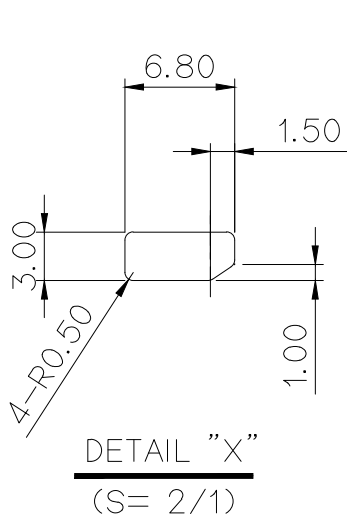


GENERAL TOLERANCE (SILICONE RUBBER)						GENERAL TOLERANCE (HOUSING)							USED ON
0 TO 6	6 TO 10	10 TO 18	18 TO 30	30 TO 50	50 TO 80	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.4	±0.5	±0.6	±0.8	±1.0	±1.2	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

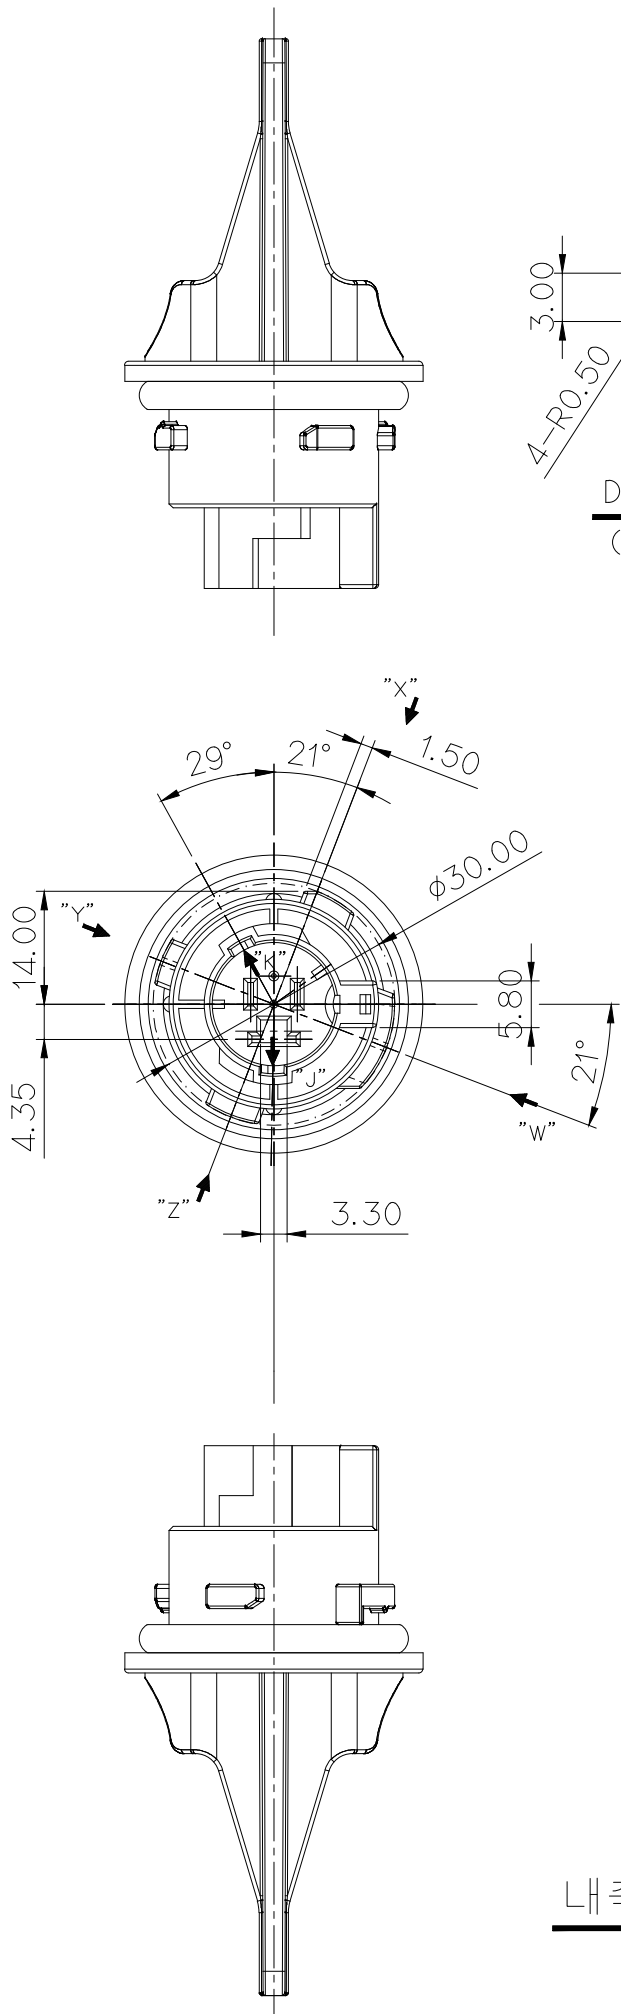

- 주 기
- 적용 TERMINAL : ST760521-1(P), ST760795-1(E)
 - 적용 WIRE SEAL : MG682028
 - 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

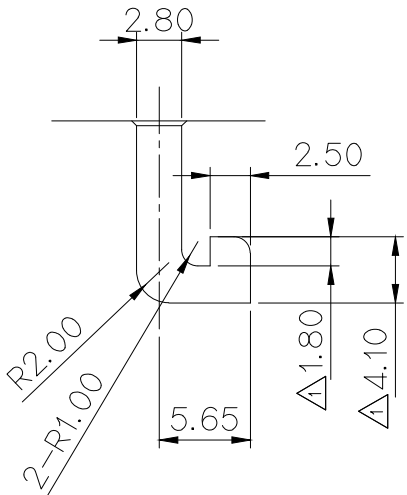

내측 SLOT부 2개소 "J", "K"
(S= 2/1)

NO	PART NO.	PART NAME	MATERIAL	FINISH	QAT'Y	
1	MG675023-41 [MG635024-41]	RCL WP B/H HOUSING (45-SINGLE-150)	NYLON66+MR30%	L/GRAY	1	1
2	R600104	RCL WP(F:45)용 SEAL GASKET	SILICONE	BLACK	1	-

NO	PART NO.	비 고
1	MG665025-41	ASSY 판매시 품번
2	MG635024-41	단품 판매시 품번



ISSUE MARK

						MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH	SEE TABLE		
						WIRE RANGE		CLASS	
						INSULATION		TYPE	
						TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1	PART NO. MG665025-41, MG635024-41
						PART NAME			
						RCL WP B/H ASS'Y (45-SINGLE-150)			