

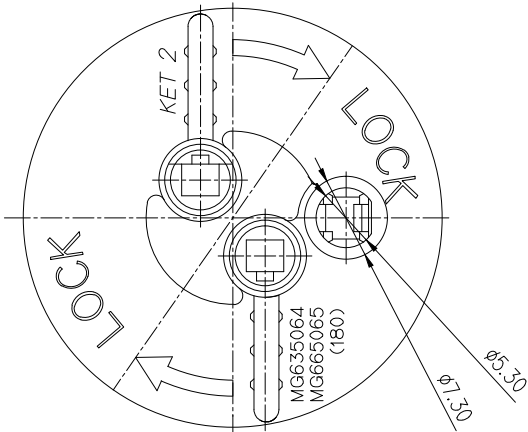
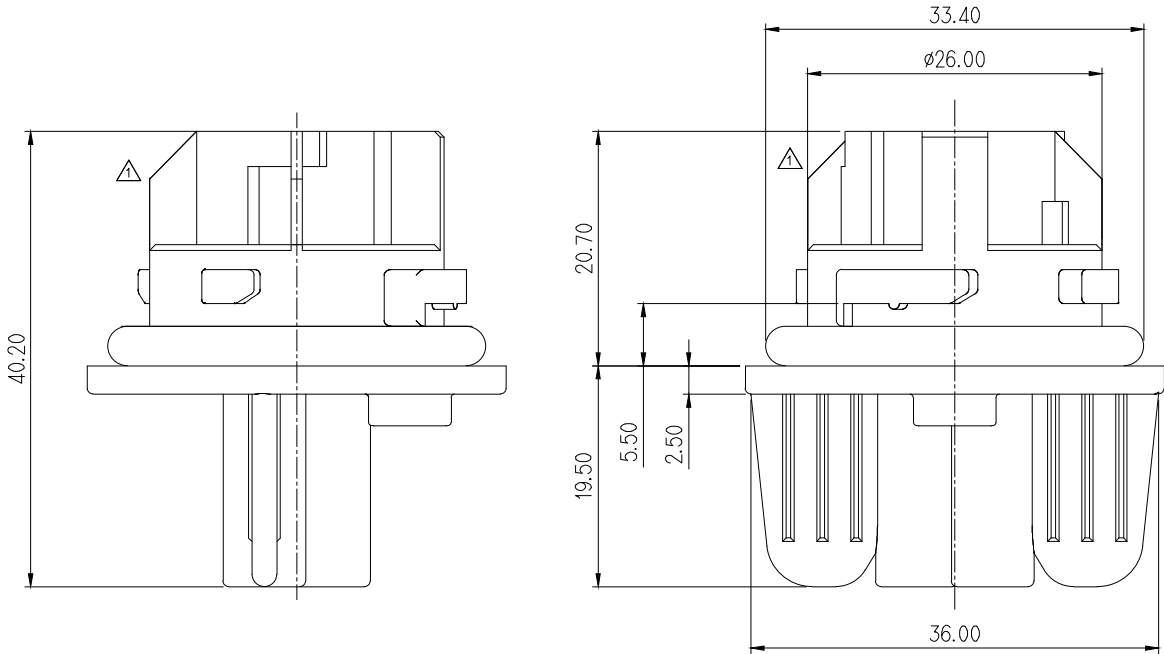
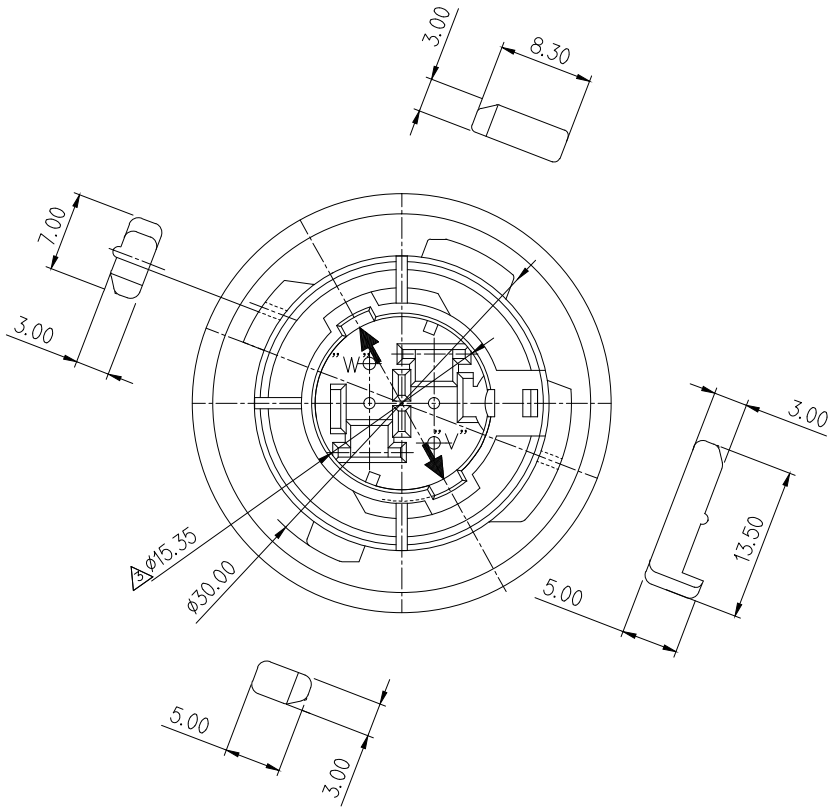
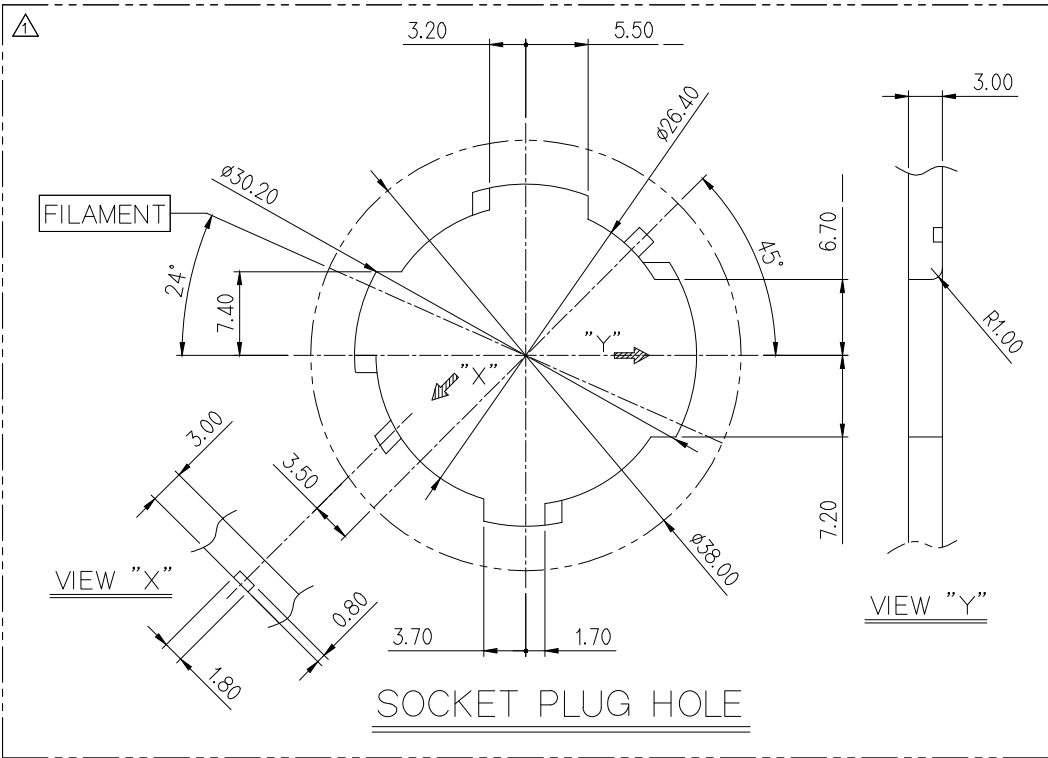


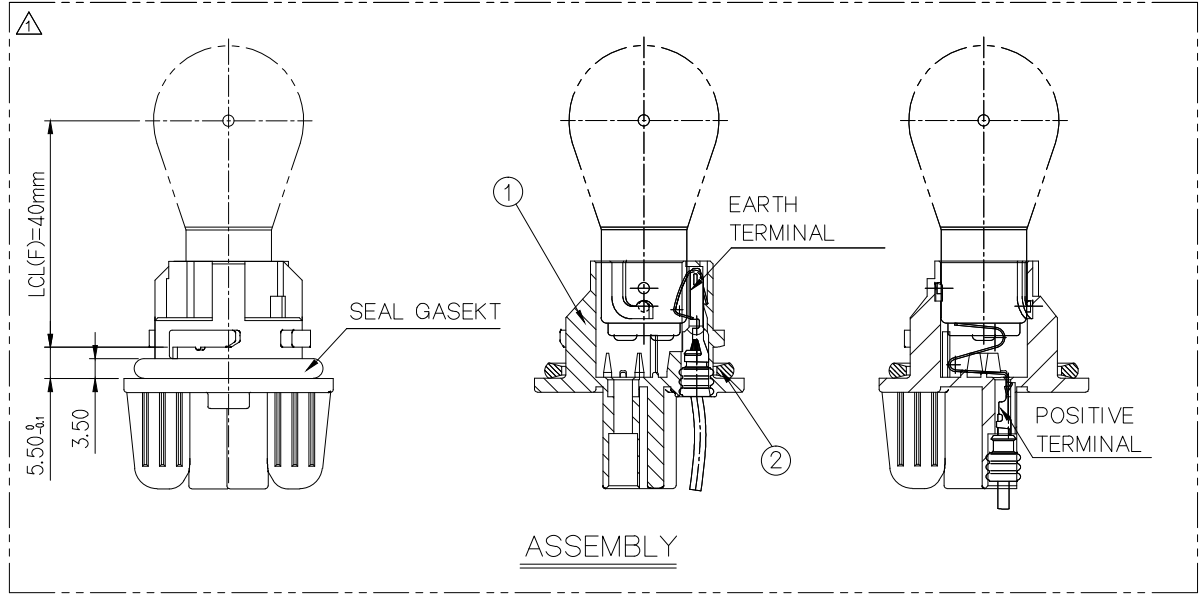

NO.	MATERIAL	COLOR
0	PA66+MR30%:	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

GENERAL TOLERANCE (HOUSING)										GENERAL TOLERANCE (SILICONE RUBBER)						USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	ECCENT	0 TO 6	6 TO 10	10 TO 18	18 TO 30	30 TO 50	50 TO 80	
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.90	±1.4	±30'	0.1	±0.4	±0.5	±0.6	±0.8	±1.0	±1.2	

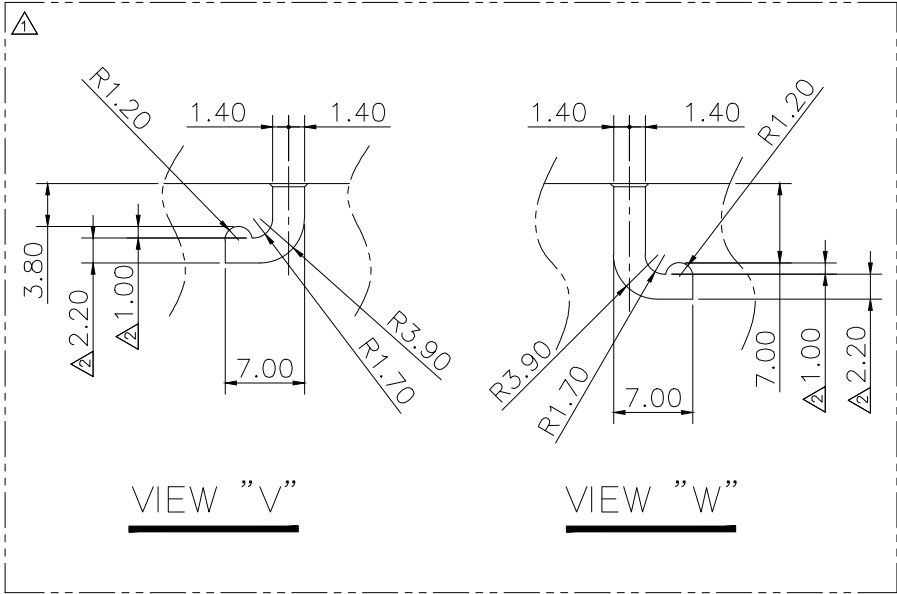


주 기

- 1.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 TERMINAL : ST760521-1(P), ST760795-1(E)
- 3.적용 WIRE SEAL : MG682028
- 4.제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- 2.APPLICABLE OF TERMINAL ST760521-1(P), ST760795-1(E)
- 3.APPLICABLE OF WIRE SEAL : MG682028
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	PART NO.	PART NAME	MATERIAL	FINISH
1	MG675063-7	RCL B/H WP DOUBLE HS'G	SEE TABLE	SEE TLABLE
2	R600104	SEAL GASKET	SILICONE	BLACK

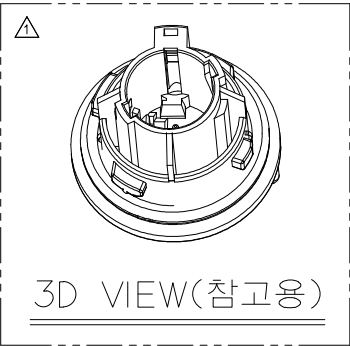

	ECO-2006-141	근거 도면 변경	SDI	KSC	CJH	20.06.11	MATERIAL	SEE TABLE	 KOREA ELECTRIC  TERMINAL CO., LTD.
	ECO-1712-459	근거 도면 변경	LND	-	CJH	17.12.28	FINISH	SEE TABLE	
	ECO-1407-017	근거 도면 변경	NKT	SSH	BIN	14.08.18	WIRE RANGE		CLASS
	ECO-1406-156	근거 도면 변경	NKT	SSH	BIN	14.06.24			
	검보 합격에 의한 도면 재배포		YJH	SSH	KKJ	10.09.17	INSULATION		TYPE
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG665065-7
DR.	YJH	10.04.05	CHK.				PART NAME		
CHK.	SSH	10.04.05	APP.		KKJ	10.04.05	RCL B/H WP DOUBLE ASS'Y (F:40-180)		

APPROVED

2020-12-11

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK