

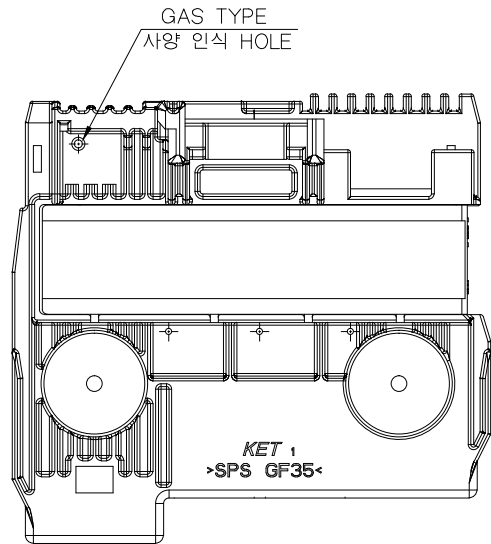
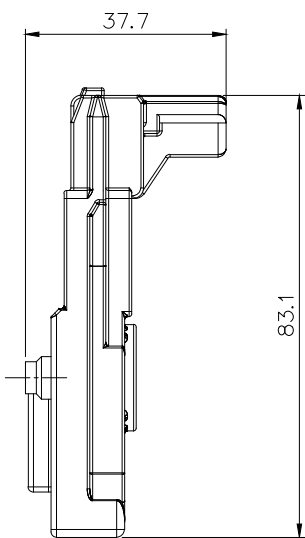
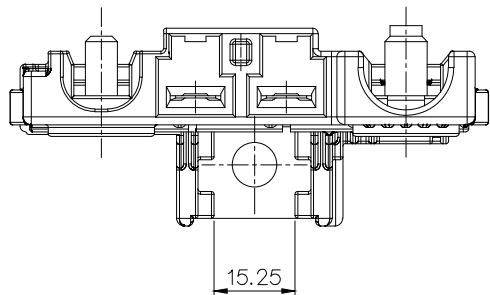
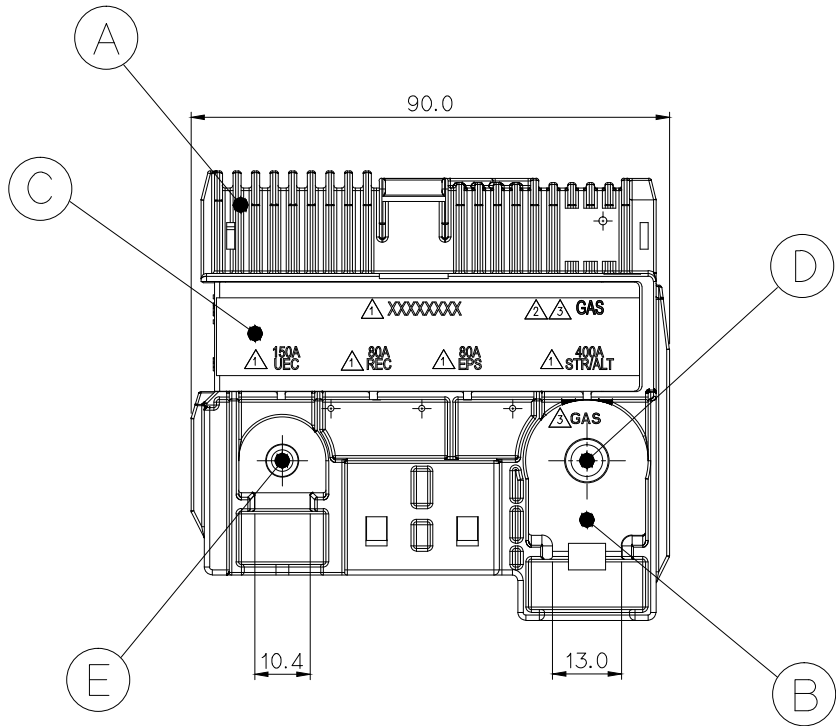


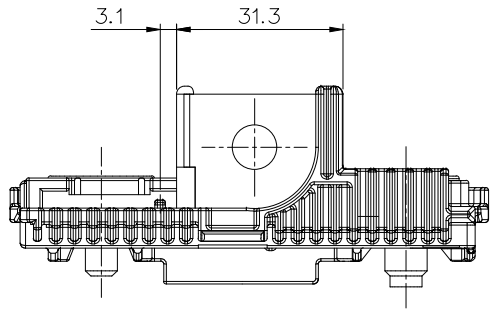

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

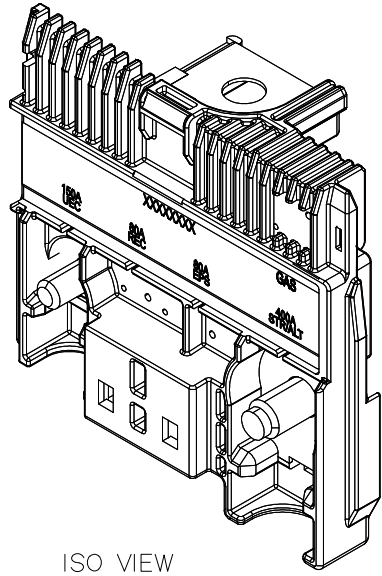

주 기

1. 기능상 유해한 BURR 및 FLASH 등이 없을것.
2. 적용 BFT 1P ASSEMBLY : MG665187
3. 적용 BFT CAP : MG635224-1

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE BFT 1P ASSEMBLY : MG665187
3. APPLICABLE BFT CAP : MG635224-1

NO.	PART NAME	MATERIAL	FINISH
Ⓐ	BFT 4P MAIN BODY	SPS	BLACK
Ⓑ	BFT 4P BUS-BAR	COPPER ALLOY	—
Ⓒ	BFT 4P ELEMENT COVER	PES	투명 BROWN
Ⓓ	M8 BOLT	STEEL	—
Ⓔ	M6 BOLT	STEEL	—

△ 사양 각인 추가 및 오류 점검		LDS	KMK	19.SEP.'18	MATERIAL	SEE TABLE	KET KOREA ELECTRIC TERMINAL CO., LTD. ENGINEERED KOREA ELECTRIC TERMINAL CO., LTD.
△ 사양 각인추가		LSH	KMK	31.JAN.'11	FINISH	SEE TABLE	
△ 류조용량 각인추가		LSH	KMK	03.DEC.'10	WIRE RANGE	—	
△ RELEASED				30.MAR.'10	INSULATION	—	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1
DR.		CHK.				PART NAME	PART NO. MG665182
CHK.		APP.				BFT 4P ASSEMBLY TYPE-C	

