

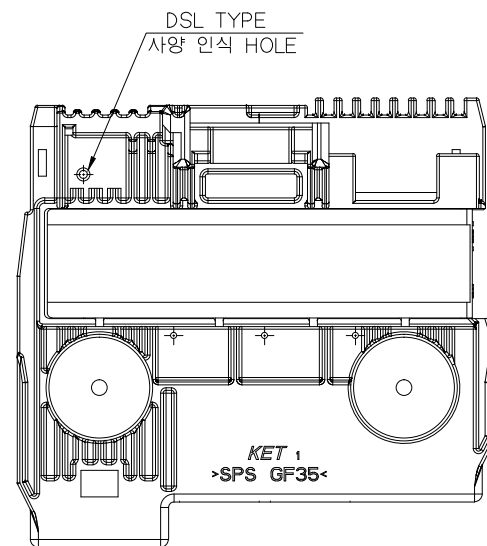
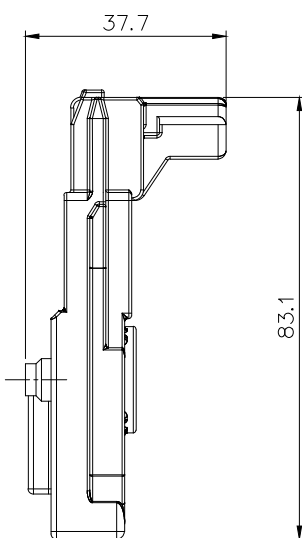
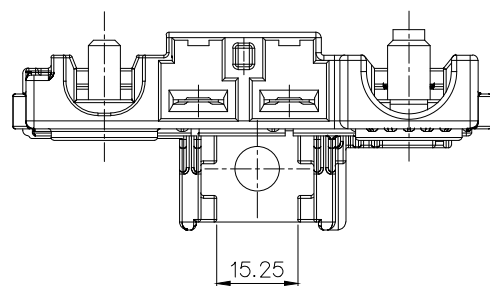
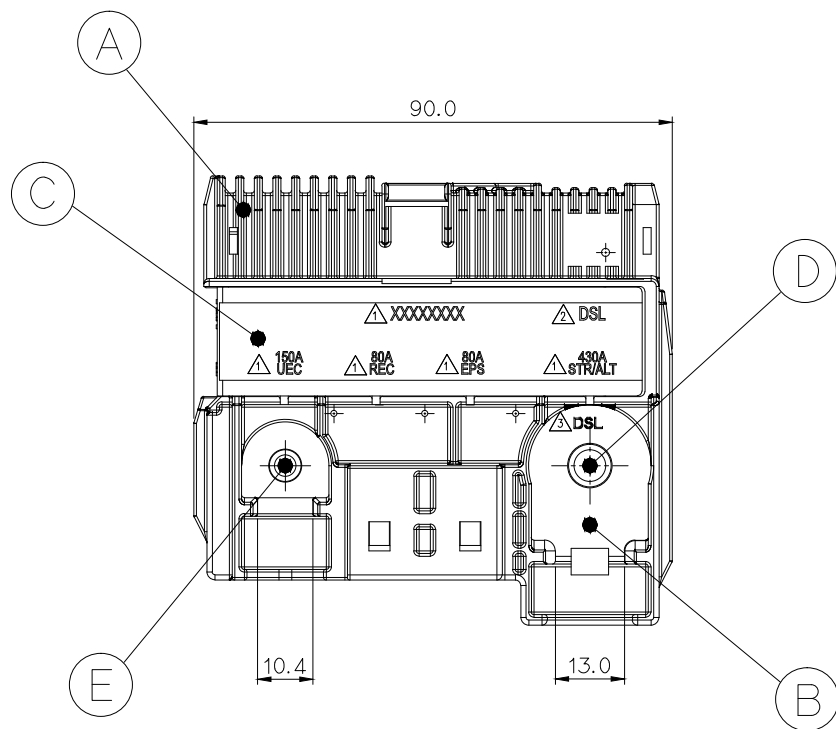


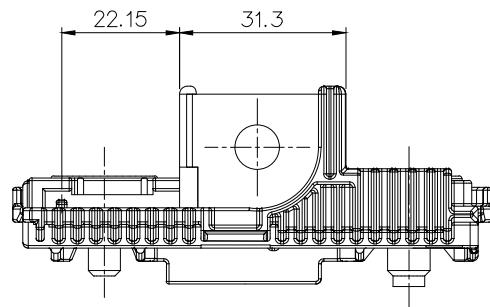

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

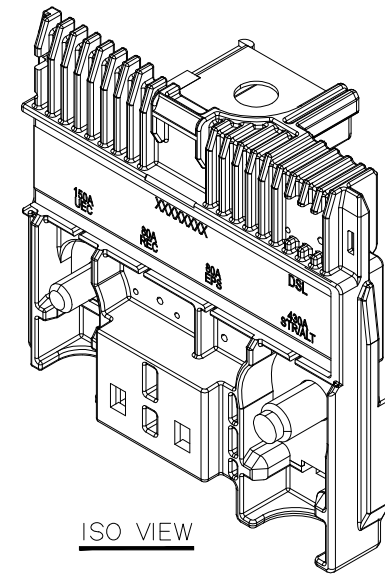

주 기

- 기능상 유해한 BURR 및 FLASH 등이 없을것.
- 적용 BFT 1P ASSEMBLY : MG665189
- 적용 BFT CAP : MG635224-1

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE BFT 1P ASSEMBLY : MG665189
- APPLICABLE BFT CAP : MG635224-1

NO.	PART NAME	MATERIAL	FINISH
(A)	BFT 4P MAIN BODY	SPS	BLACK
(B)	BFT 4P BUS-BAR	COPPER ALLOY	-
(C)	BFT 4P ELEMENT COVER	PES	투명 BROWN
(D)	M8 BOLT	STEEL	-
(E)	M6 BOLT	STEEL	-

					MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH		SEE TABLE	
					WIRE RANGE		CLASS	
					INSULATION		FUSE	
	시양 각인 추가	LDS	KMK	19.SEP.'18				
	시양 각인추가	LSH	KMK	31.JAN.'11				
	퓨즈용량 각인추가	LSH	KMK	03.DEC.'10				
	RELEASED			30.MAR.'10				
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
DR.		CHK.				SEE TABLE	1/1	MG665184
CHK.		APP.				PART NAME	BFT 4P ASSEMBLY TYPE-C	

APPROVED
2019-11-06KOREA ELECTRIC
TERMINAL CO., LTD.
KOREA ELECTRIC
TERMINAL CO., LTD.