
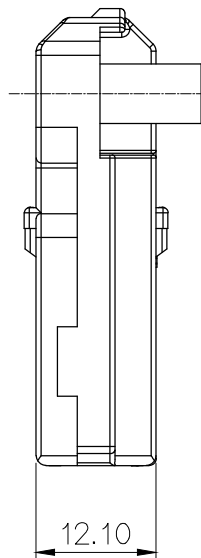



SECTION A-A

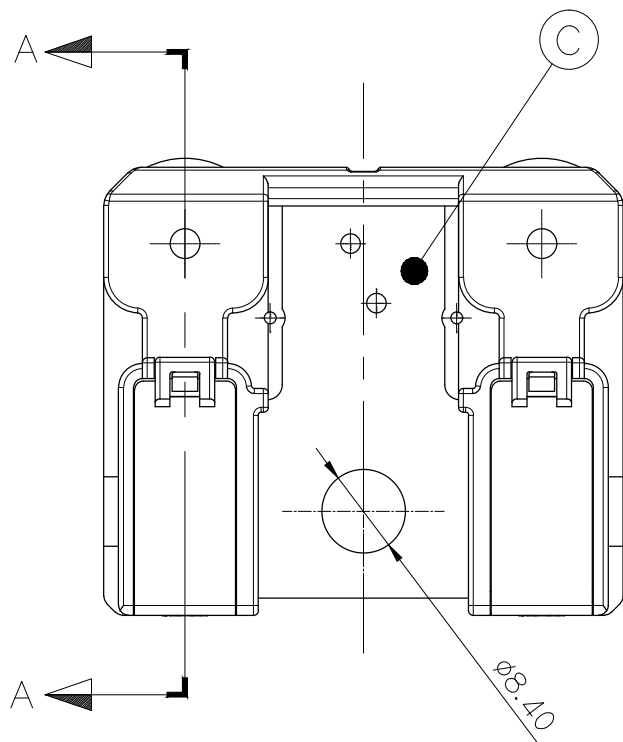


년도 월 일 시간

DETALE "Z"
(S= 5/1)DETAIL "Z"
(LOT No.)

사양식별 각인

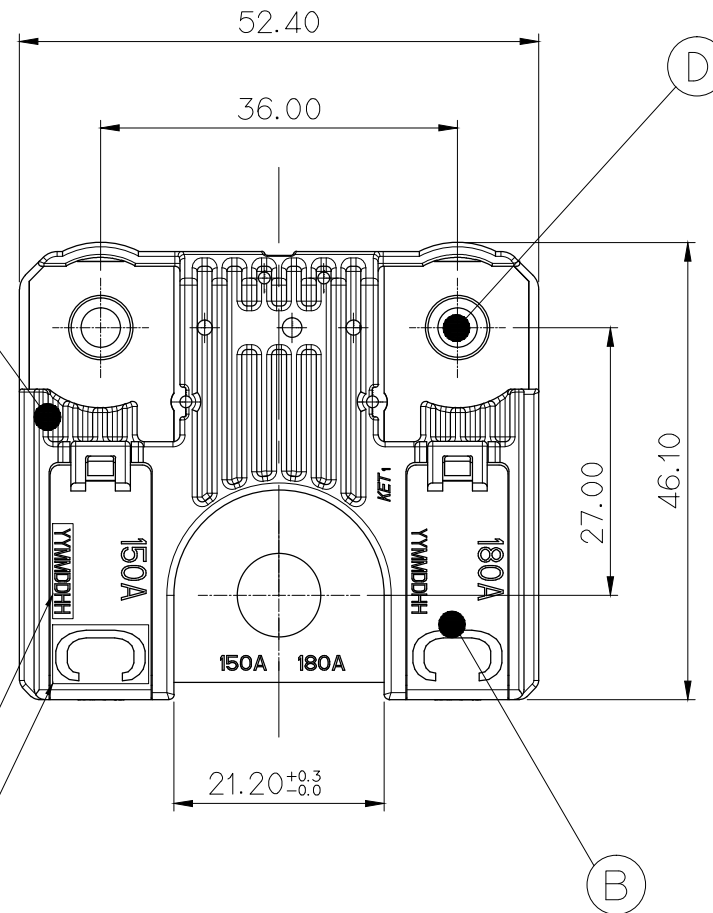

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

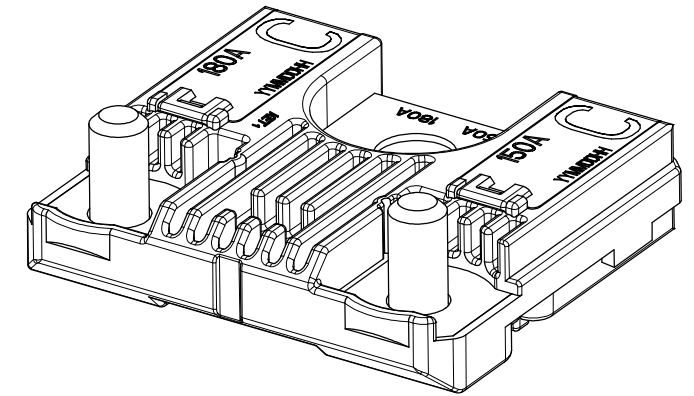

ISO VIEW

주 기

1. 기능상 유해한 BURR 및 FLASH 등이 없을것.
2. 아래의 규격을 만족할 것.
 - 1) 일반공차 : ES05206-00(보통치수 허용차-MOLD(2급))
 - 2) 중금속 : MS201-02(자동차 부품 및 재료의 중금속 사용 금지)
 - 3) ES91872-00(전장품 BFT 평가규격)
 - 4) M6 BOLT TORQUE : 0.8Kgf·m ~ 1.2Kgf·m

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. MUST MEET BELOW SPEC.
 - 1) GENERAL TOLERANCE : ES05206-00 (MOLD PARTS-2ND)
 - 2) HEAVY METAL : MS201-02 (PROHIBITION OF USE OF HEAVY METAL FOR AUTOMOTIVE PARTS)
 - 3) ES91872-00 (THE TEST SPECIFICATION FOR AUTOMOTIVE BFT)
 - 4) M6 BOLT TORQUE : 0.8Kgf·m ~ 1.2Kgf·m



ISSUE MARK

NO.	PART NAME	MATERIAL	FINISH/COLOR	PART NO
(A)	BFT 2P MAIN BODY	PA6T GF35	BLACK	MG675285-5
(B)	BFT 2P ELEMENT COVER	PES	투명 BROWN	MG674480-7
(C)	BFT 2P BUS-BAR	COPPER ALLOY	PRE-TIN	ST791129-3
(D)	M6 BOLT	STEEL	PFZnNi5	R602215

						MATERIAL	SEE TABLE	 KET KOREA ELECTRIC TERMINAL CO., LTD.		
						FINISH	SEE TABLE			
						WIRE RANGE			CLASS	FUSE
						INSULATION			TYPE	C
 RELEASED		YEB	KMK	KH	24 JUN '15					
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE ACCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO.	MG665284
DR.		CHK.					PART NAME			
CHK.		APP.								
							BFT 2P TYPE C ASSEMBLY			