

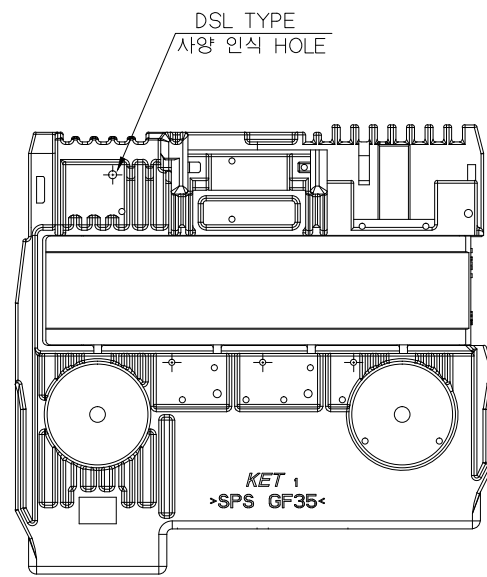
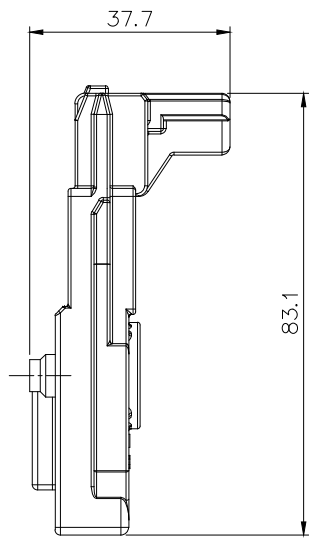
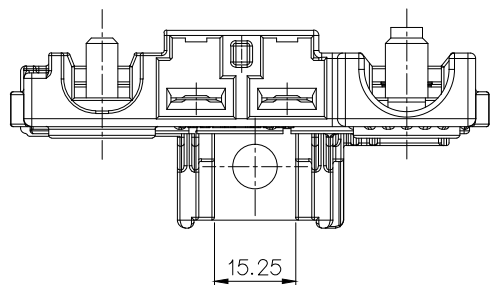
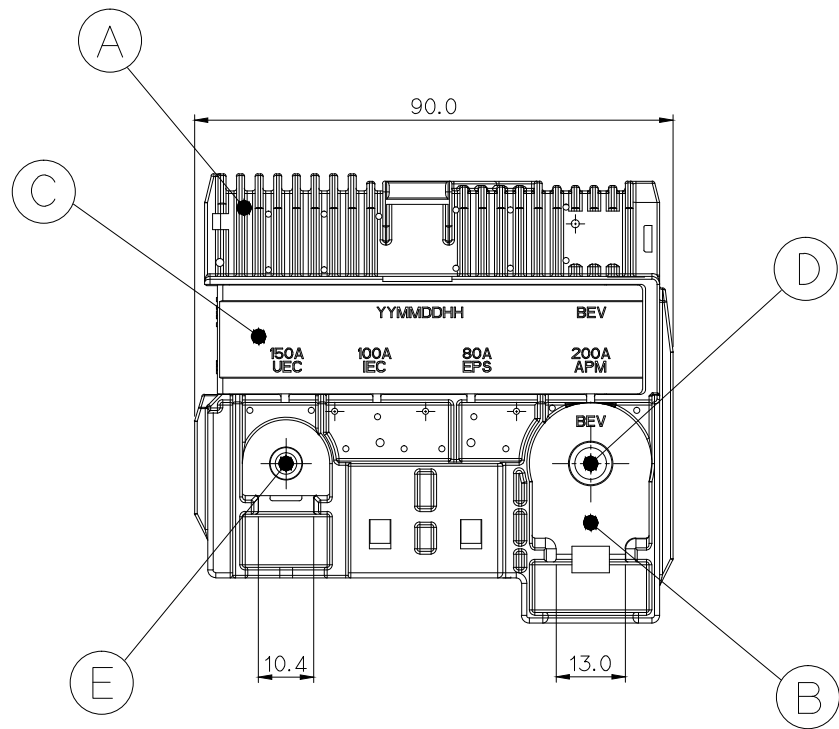


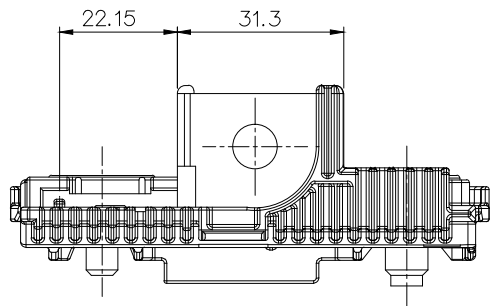

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

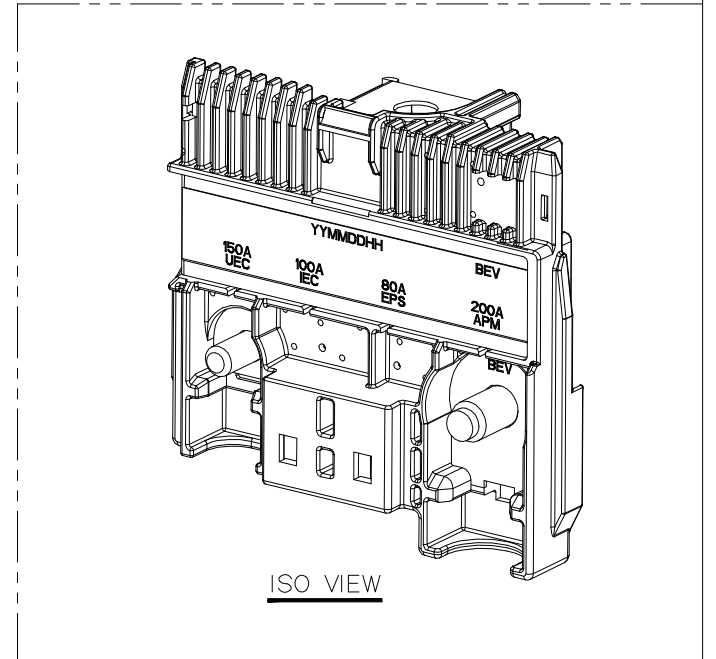

주 기

- 기능상 유해한 BURR 및 FLASH 등이 없을것.
- 적용 BFT CAP : MG635562-1

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE BFT CAP : MG635562-1

NO.	PART NAME	MATERIAL	FINISH
(A)	BFT 4P MAIN BODY	SPS - GF35	BLACK
(B)	BFT 4P BUS-BAR	COPPER ALLOY	-
(C)	BFT 4P ELEMENT COVER	PES	투명 BROWN
(D)	M8 BOLT	STEEL	-
(E)	M6 BOLT	STEEL	-

				MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
				FINISH	SEE TABLE	TERMINAL CO., LTD.	
				WIRE RANGE		CLASS	FUSE
				INSULATION		TYPE	BFT 4P TYPE D
	RELEASED			KH	17.JUL.'12		
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1
DR.		CHK.				PART NO.	MG665573
CHK.		APP.		PART NAME BFT 4P ASSEMBLY TYPE-D			

