

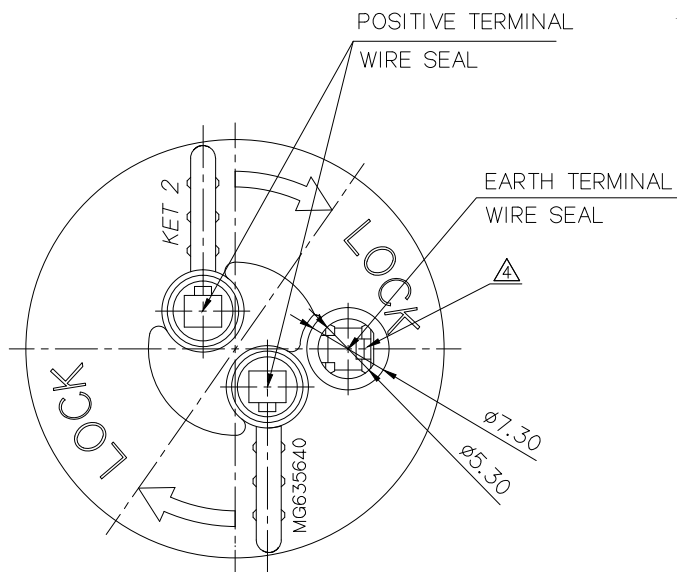
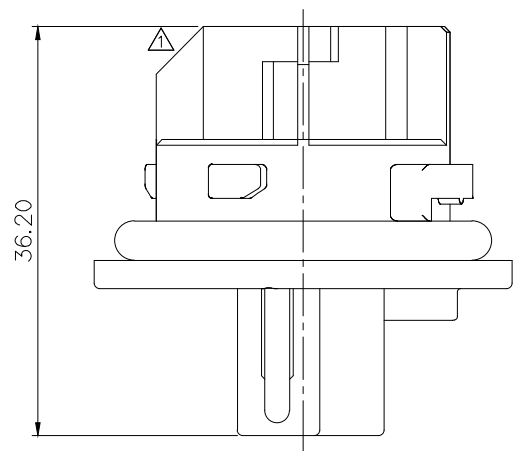
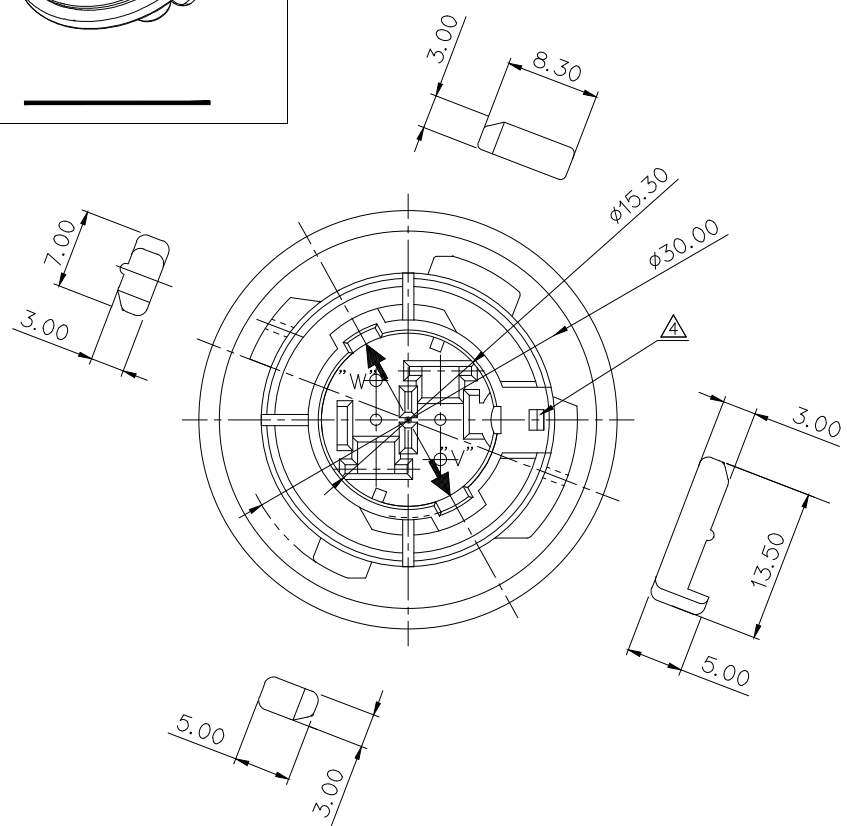



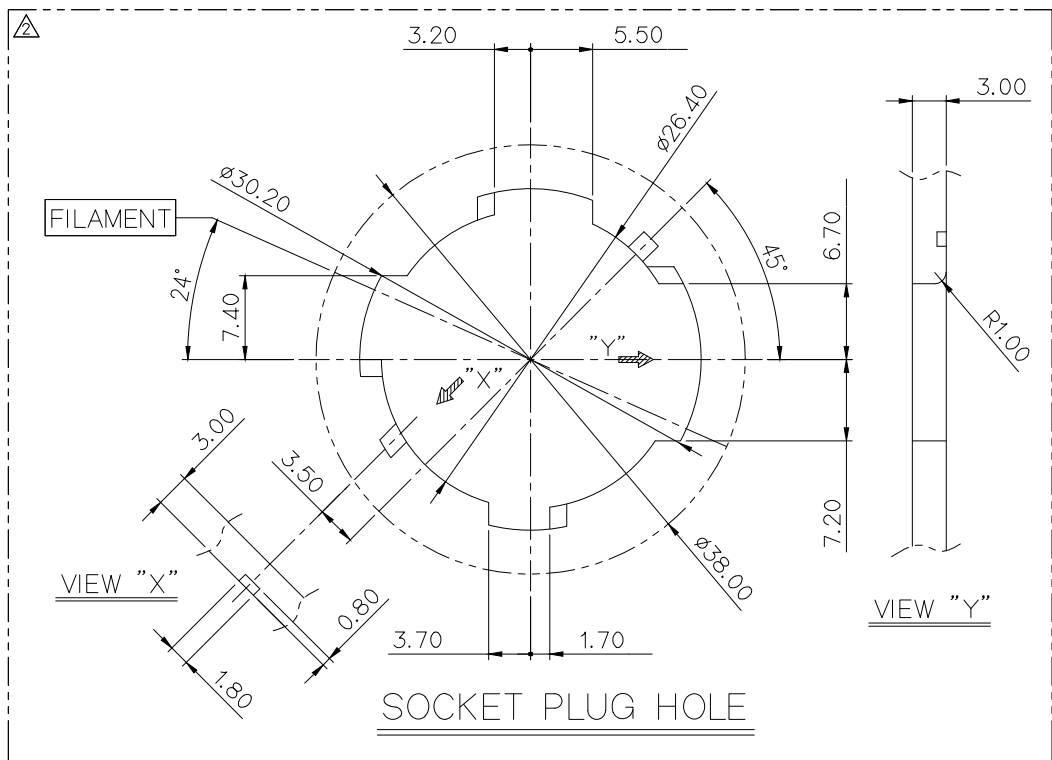

GENERAL TOLERANCE (HOUSING)										GENERAL TOLERANCE (SILICONE RUBBER)						USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	ECCENT	0 TO 6	6 TO 10	10 TO 18	18 TO 30	30 TO 50	50 TO 80	
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.90	±1.4	±30'	0.1	±0.4	±0.5	±0.6	±0.8	±1.0	±1.2	

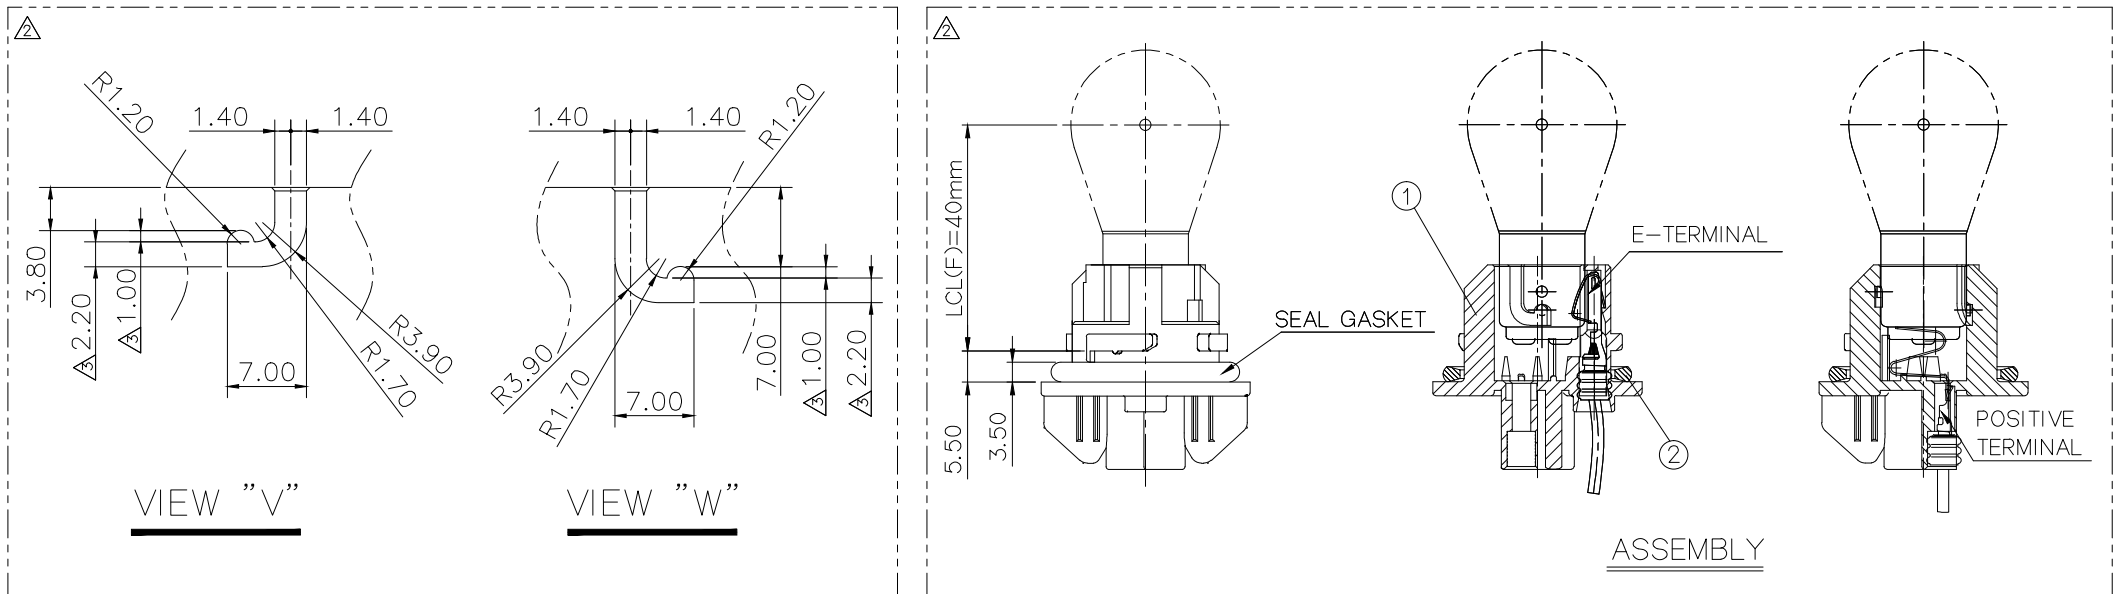

		5	
No	MATERIAL	COLOR	
0	PA66+MR30%	NATURAL	
1		RED	
2		BLUE	
20		JADE	
3		YELLOW	
4		GRAY	
* 40		DARK GRAY	
41		LIGHT GRAY	
5		BLACK	
* 6		DARK GREEN	
7		BROWN	
8		LIGHT GREEN	
9		MAGENTA	
11		GRANGE	

1. MUST BE FREE OF FLASH, SINK
AND IMPERFECTION THAT AFFECT FUNCTION.

2. APPLICABLE OF TERMINAL
ST760521-1(P), ST760795-1(E)

3. APPLICABLE OF WIRE SEAL : MG682028(E)
MG685413(P)

4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,
MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs,
PBDEs) SHALL NOT EXCEED THE MAXIMUM
PERMISSIBLE CONCENTRATION PRESCRIBED UNDER
EU ELV DIRECTIVE & RoHS REGULATION.

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
2. 적용 TERMINAL : ST760521-1(P), ST760795-1(E)
3. 적용 WIRE SEAL : MG682028(E), MG685413(P)
4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NO.	PART NO.	PART NAME	MATERIAL	FINISH
1	MG635640-40	RCL B/H WP DOUBLE HS'G	SEE TABLE	SEE TABLE
2	R600104	SEAL GASKET	SILICONE	BLACK

						ISSUE MARK				
	ECO-2006-141 근거 도면 변경	SDI	KSC	CJH	20.06.15	 KOREA ELECTRIC TERMINAL CO., LTD.				
	ECO-1810-010 근거 도면 변경	LND	KSC	CJH	18.10.01			MATERIAL	SEE TABLE	
	ECO-1408-017 근거 도면 변경	NKT	SSH	BIN	14.08.18			FINISH	SEE TABLE	
	ECO-1406-156 근거 도면 변경	NKT	SSH	BIN	14.06.24			WIRE RANGE	CLASS	
	ECO-1309-049 근거 도면 변경	NKT	JBS	CKW	13.09.10			INSULATION	TYPE	
	제품합력에 의한 양산도면 출도	NKT	다인	李	13.06.19					
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO.	MG665624-40
DR.	NKT	13.01.23	CHK.	다인	13.01.24	PART NAME		RCL B/H WP DOUBLE ASS'Y (F:40-180)		
CHK.			APP.	李	13.01.24					