



PART NO. MG665635



CUSTOMER DRAWING

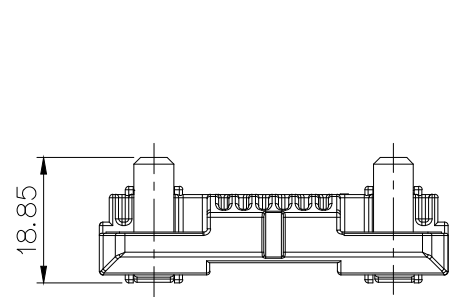

년도 월 일 시간

DETALE "Z"
(S= 5/1)

SECTION A-A

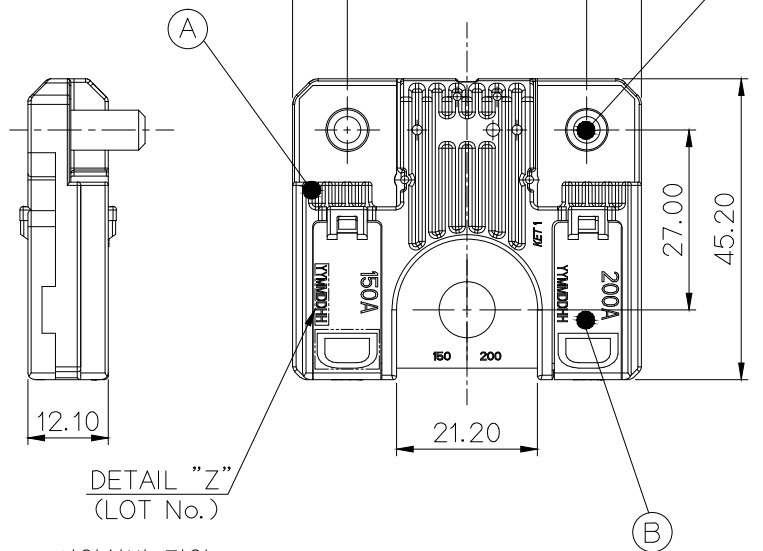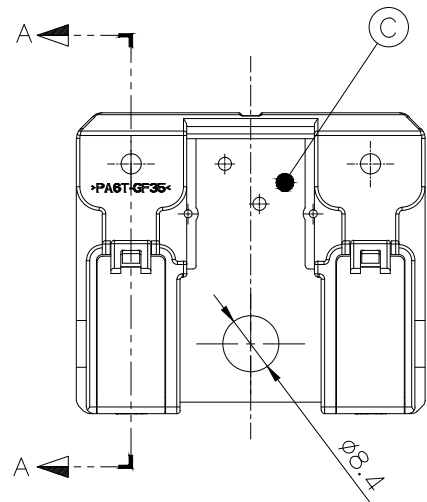DETAIL "Z"
(LOT No.)


사양식별 각인

NO.	PART NAME	MATERIAL	COLOR/FINISH
(A)	BFT 2P MAIN BODY	PA6T-GF35	BLACK
(B)	BFT 2P ELEMENT COVER	PES	투명 BROWN
(C)	BFT 2P BUS-BAR(200A, 150A)	COPPER ALLOY	PRE-TIN
(D)	M6 BOLT	STEEL	PFZnNi5

GENERAL TOLERANCE (HOUSING)

10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

USED ON

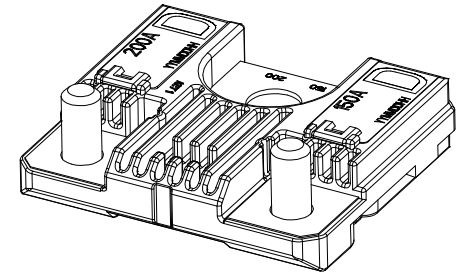

3D VIEW

주 기

1. 기능상 유해한 BURR 및 WELDLINE이 없을것.

2. 아래의 규격을 만족할 것.

1) 일반공차 : ES05206-00(보통치수 허용차-MOLD(2급))

2) 중금속 : MS201-02(자동차 부품 및 재료의 중금속 사용 금지)

3) ES91872-00(전장품 BFT 평가규격)

4) M6 BOLT TORQUE : 80Kgf.cm - 120Kgf.cm

파단 TORQUE SPEC : OVER 130Kgf.cm

NOTE

1. MUST BE FREE OF BURR, WELDLINE

AND IMPERFECTION THAT AFFECT FUNCTION.

2. MUST MEET BELOW SPEC.

1) GENERAL TOLERANCE : ES05206-00 (MOLD PARTS-2ND)

2) HEAVY METAL : MS201-02 (PROHIBITION OF USE OF
HEAVY METAL FOR AUTOMOTIVE PARTS)3) ES91872-00 (THE TEST SPECIFICATION FOR AUTOMOTIVE
BFT)

4) M6 BOLT TORQUE : 80Kgf.cm - 120Kgf.cm

BREAKING TORQUE SPEC : OVER 130Kgf.cm



ISSUE MARK

				MATERIAL		SEE TABLE		KOREA ELECTRIC TERMINAL CO., LTD.
				FINISH		SEE TABLE		
				WIRE RANGE		/	CLASS	FUSE
				INSULATION		/	TYPE	TYPE D
LTR		REVISION RECORD		DR.	CHK.	APP.	DATE	PART NO.
								MG665635
				TOLERANCE EXCEPT AS NOTED		SEE TABLE	SCALE	
							1/1	
				PART NAME		BFT 2P ASSEMBLY(200A,150A)		