






YYMMDDHH

년 월 일 시간

DETAILE "Z"
(S= 5/1)

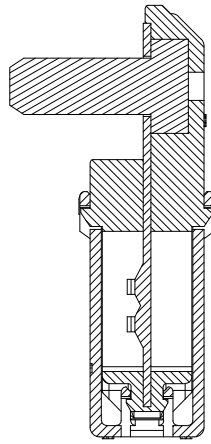


SECTION A-A

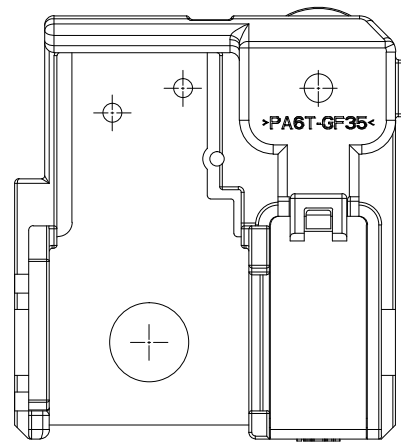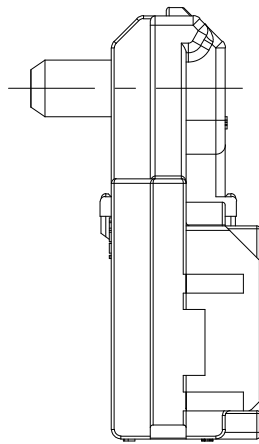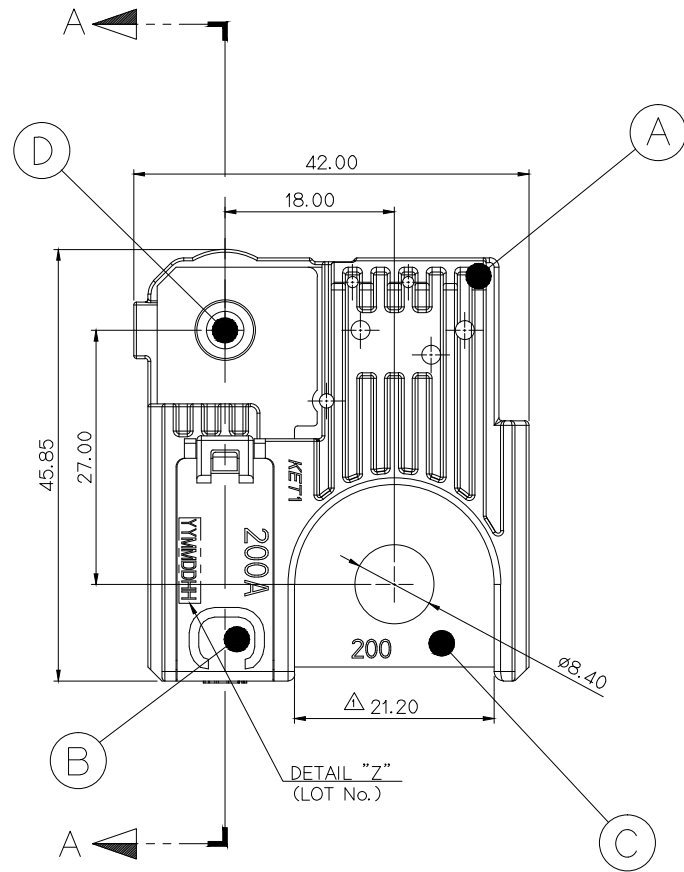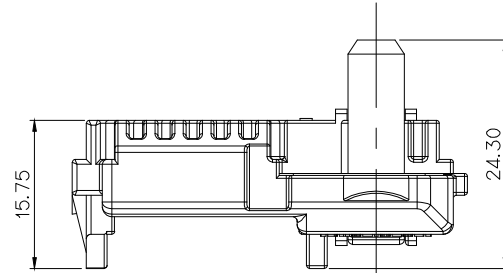

NO.	PART NAME	MATERIAL	FINISH
(A)	BFT 1P MAIN BODY	PA6T GF35	BLACK
(B)	BFT 1P ELEMENT COVER	PES	투명 BROWN
(C)	BFT 1P BUS-BAR	COPPER ALLOY	PRE-TIN
(D)	M6 BOLT	STEEL	PFZnNi5

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

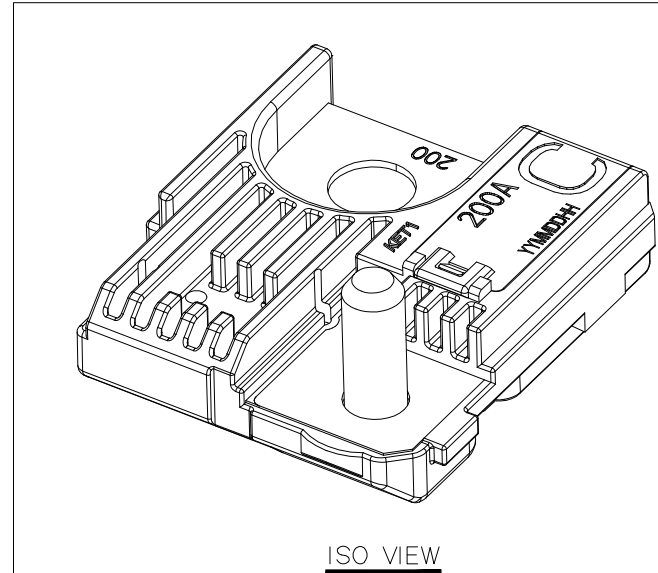

ISO VIEW

주 기

- 기능상 유해한 BURR 및 WELDLINE이 없을 것.
- 아래의 규격을 만족할 것.
 - 1) 일반공차 : ES05206-00(보통치수 허용차-MOLD(2급))
 - 2) 중금속 : MS201-02(자동차 부품 및 재료의 중금속 사용 금지)
 - 3) 성능평가 : ES91872-00(전장품 BFT 1P 평가규격)
 - 4) M6 BOLT TORQUE : 0.8Kgf - 1.2Kgf

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- MUST MEET BELOW SPEC.
 - 1) GENERAL TOLERANCE : ES05206-00 (MOLD PARTS-2ND)
 - 2) HEAVY METAL : MS201-02 (PROHIBITION OF USE OF HEAVY METAL FOR AUTOMOTIVE PARTS)
 - 3) THE TEST SPECIFICATION : ES91872-00 (THE TEST SPECIFICATION FOR AUTOMOTIVE BFT 1P)
 - 4) M6 BOLT TORQUE : 0.8Kgf - 1.2Kgf



ISSUE MARK

				MATERIAL	SEE TABLE	KET KOREA ELECTRIC TERMINAL CO., LTD.	
				FINISH	SEE TABLE		
				WIRE RANGE	SEE TABLE	CLASS	FUSE
				INSULATION	SEE TABLE	TYPE	TYPE C
△ 도면 치수 오키 : 21.32 → 21.20 △ RELEASE	LKJ KMK KH LKJ KMK KH	12.MAY.14 20.MAR.14	DATE DATE	REVISION RECORD DR. CHK. APP.	SCALE 2/1	PART NO. MG665639	
				PART NAME BFT 1P ASSEMBLY(200A)			