



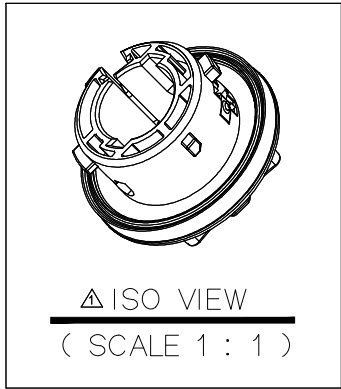

주 기


- 1.지시하지 않은 반경 R은 0.3으로 한다.
- 2.지시하지 않은 모따기 C는 0.3으로 한다.
- 3.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 4.SEAL GASKET 접촉 및 RIB PARTING면에 BURR 등이 없을 것.
- 5.적용 BRACKET : MG635677-4
- 6.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

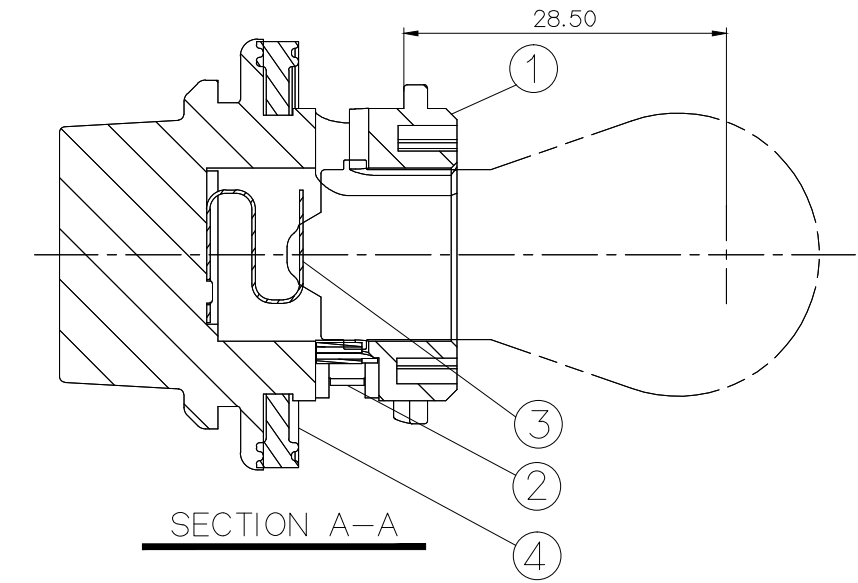





NOTE

- 1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
- 2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
- 3. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- 4. FLASH ARE NOT ALLOWED ON CONTACT MOLDED PART OF SEAL GASKET.
- 5.APPLICABLE OF BRACKET: MG635677-4
- 6. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

| GENERAL TOLERANCE (SILICONE RUBBER) |         |          |          |          |          | GENERAL TOLERANCE (TERMINAL) |       |       |       |        | GENERAL TOLERANCE (HOUSING) |       |        |        |       |       |        | USED ON |
|-------------------------------------|---------|----------|----------|----------|----------|------------------------------|-------|-------|-------|--------|-----------------------------|-------|--------|--------|-------|-------|--------|---------|
| 0 TO 6                              | 6 TO 10 | 10 TO 18 | 18 TO 30 | 30 TO 50 | 50 TO 80 | 10MAX                        | 20MAX | 45MAX | ANGLE | ECCENT | 10MAX                       | 50MAX | 100MAX | 250MAX | 250VR | ANGLE | ECCENT |         |
| ±0.4                                | ±0.5    | ±0.6     | ±0.8     | ±1.0     | ±1.2     | ±0.2                         | ±0.25 | ±0.3  | ±30'  | 0.1    | ±0.2                        | ±0.30 | ±0.55  | ±0.95  | ±1.40 | ±30'  | 0.1    |         |

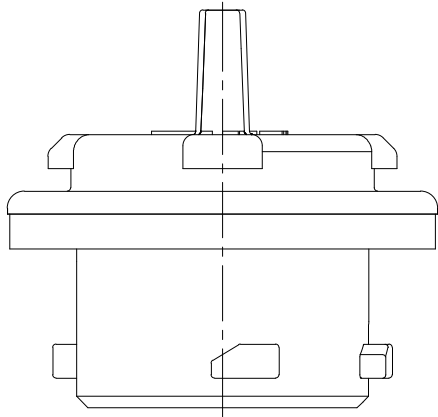

| NO.  | MATERIAL   | COLOR       |
|------|------------|-------------|
| 0    | PA66-GF30% | NATURAL     |
| 1    |            | RED         |
| 2    |            | BLUE        |
| 20   |            | JADE        |
| 3    |            | YELLOW      |
| 4    |            | GRAY        |
| 40   |            | DARK GRAY   |
| * 41 |            | LIGHT GRAY  |
| 5    |            | BLACK       |
| 6    |            | DARK GREEN  |
| 7    |            | BROWN       |
| △* 8 |            | LIGHT GREEN |
| 9    |            | MAGENTA     |
| 11   |            | ORANGE      |

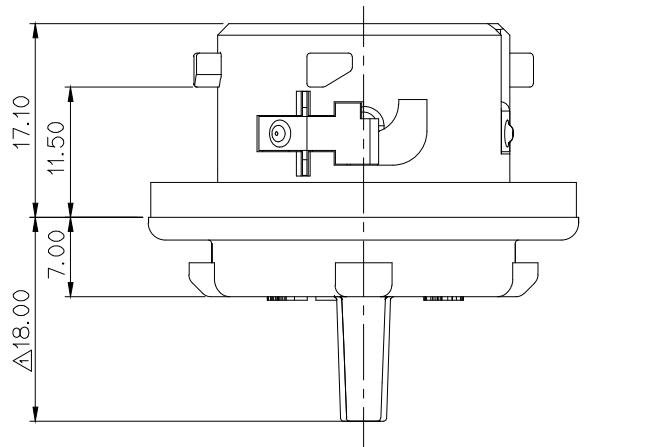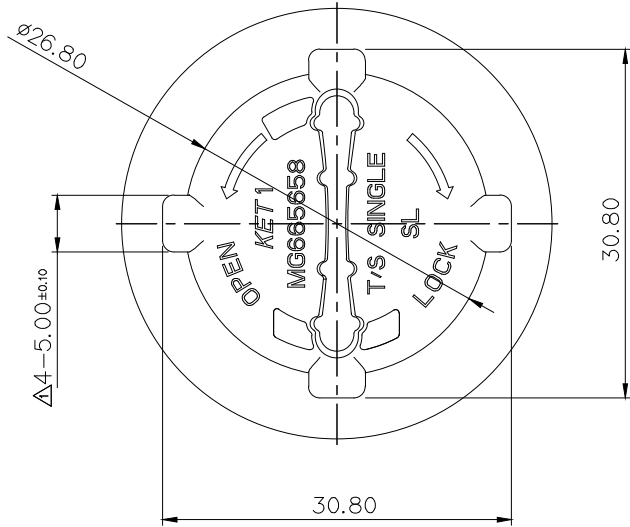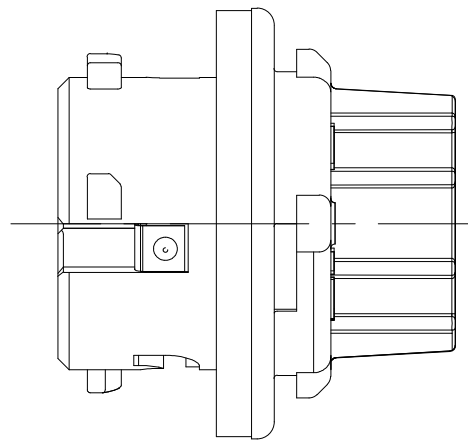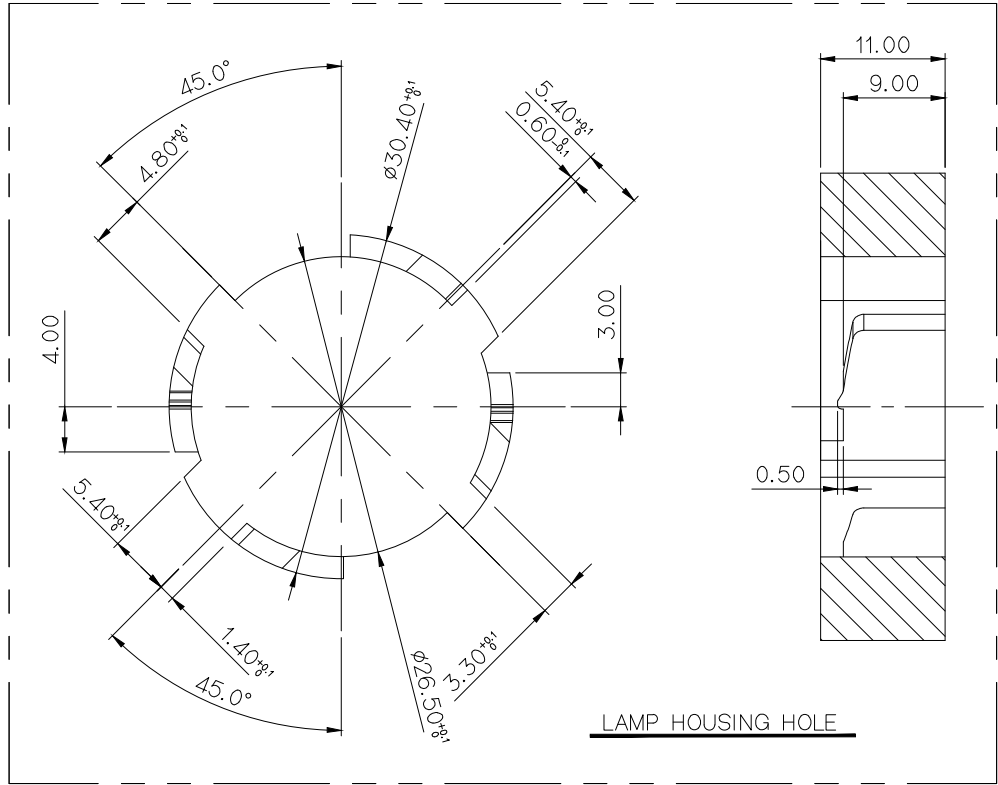

| NO. | PART NO.    | PART NAME                       | MATERIAL      | FINISH     | U/S |
|-----|-------------|---------------------------------|---------------|------------|-----|
| 1   | △MG676112   | T/SIGNAL SOCKET HOUSING(SINGLE) | △SEE TABLE    | △SEE TABLE | 1   |
| 2   | △ST792560-3 | T/SIGNAL SOCKET EARTH TML       | △COPPER ALLOY | PRE-TIN    | 1   |
| 3   | △ST792561-3 | T/SIGNAL SOCKET POSITIVE TML    | △COPPER ALLOY | PRE-TIN    | 1   |
| 4   | R602951     | T/SIGNAL B/H WP SEAL GASKET     | SILICONE      | RED        | 1   |

APPROVED

2020-12-09

KOREA ELECTRIC  
TERMINAL CO., LTD.  
Korea Electric Te  
rminal Co., LTD.

ISSUE MARK

**KIET** KOREA ELECTRIC  
ENGINEERED TERMINAL CO., LTD.

CLASS

TYPE

PART NO. △MG665658

TURN SIGNAL SOCKET ASS'Y (SINGLE)

|      |                                             |      |                |      |            |                           |           |
|------|---------------------------------------------|------|----------------|------|------------|---------------------------|-----------|
|      |                                             |      |                |      | MATERIAL   | SEE TABLE                 |           |
|      |                                             |      |                |      | FINISH     | SEE TABLE                 |           |
|      |                                             |      |                |      | WIRE RANGE |                           |           |
|      |                                             |      |                |      | INSULATION |                           |           |
| △    | ECO-2003-151 근거 도면 제작성                      | STJ  | KSC            | CJH  | 20.03.11   |                           |           |
| △    | ECO-1701-564 근거 도면 제작성 (BROWN 색상 추가 및 오기정정) | KSJ  | CJH            | LSY  | 17.02.06   |                           |           |
| LTR  | REVISION RECORD                             | DR.  | CHK.           | APP. | DATE       | TOLERANCE EXCEPT AS NOTED | SCALE 2/1 |
| DR.  | KDR, '13.12.18                              | CHK. | JBS, '13.12.19 |      |            |                           |           |
| CHK. |                                             | APP. | CWK, '13.12.19 |      |            |                           |           |