
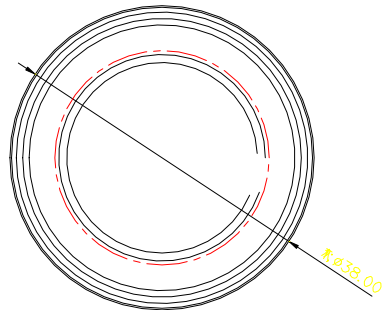


ISO VIEW


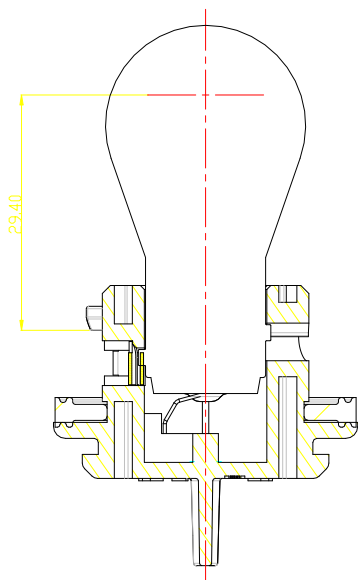


주 기




- 1.지시하지 않은 반경 R은 0.3으로 한다.
- 2.지시하지 않은 모따기 C는 0.3으로 한다.
- 3.가능상 유해한 BURR 및 WELDLINE등이 없을것.
- 4.SEAL GASKET 접촉 및 RIB PARTING면에 BURR 등이 없을 것.
- 5.적용 BRACKET : MG635677-7
- 6.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE


1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
3. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
4. FLASH ARE NOT ALLOWED ON CONTACT MOLDED PART OF SEAL GASKET.
5. APPLICABLE OF BRACKET: MG635677-7
6. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

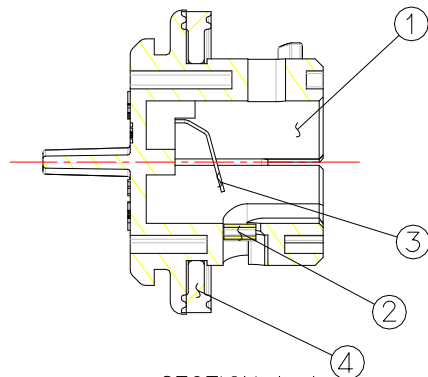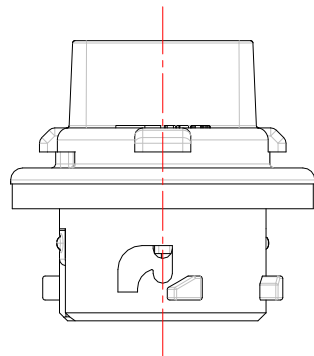


SECTION A-A

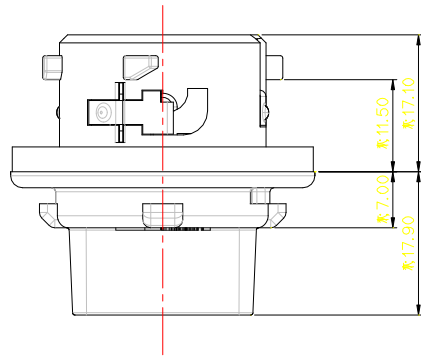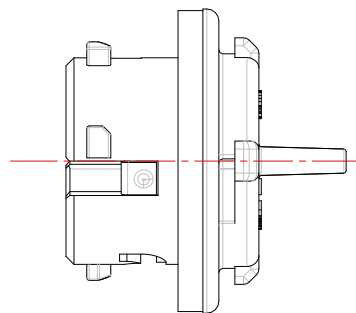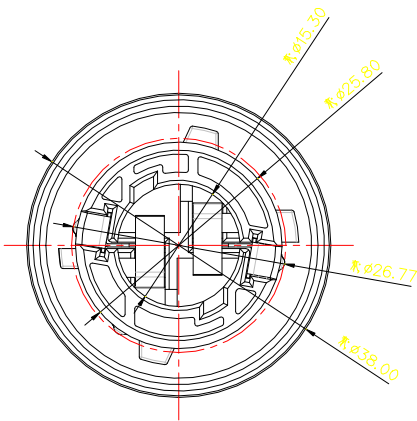

GENERAL TOLERANCE (SILICONE RUBBER)						GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)						USED ON
0 TO 6	6 TO 10	10 TO 18	18 TO 30	30 TO 50	50 TO 80	10MAX	20MAX	45MAX	ANGLE	ECCENT	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.4	±0.5	±0.6	±0.8	±1.0	±1.2	±0.2	±0.25	±0.3	±30'	0.1	±0.2	±0.30	±0.55	±0.95	±1.40	±30'	0.1

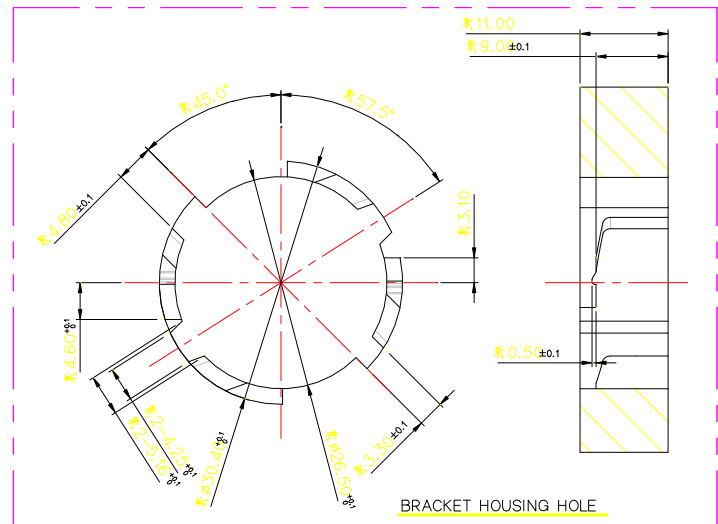

BRACKET HOUSING HOLE

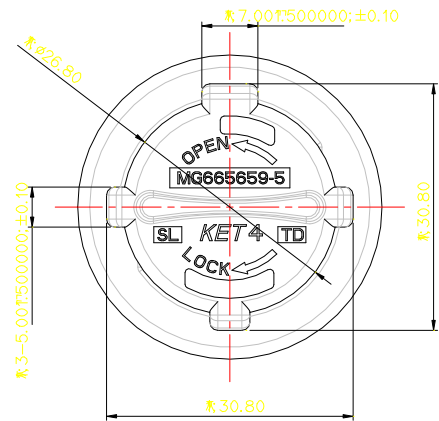

1	MG686113-5	T/SIGNAL SOCKET HOUSING(SINGLE)	PA66+G/F30%	BROWN	1
2	ST792560-2	T/SIGNAL SOCKET EARTH TML	C5210H	PRE-TIN	1
3	ST792561-2	T/SIGNAL SOCKET POSITIVE TML	C5210H	PRE-TIN	1
4	R602951	T/SIGNAL B/H WP SEAL GASKET	SILICONE	RED	1
NO.	PART NO.	PART NAME	MATERIAL	FINISH	U/S



ISSUE MARK

					MATERIAL	SEE TABLE		KET ENGINEERED KOREA ELECTRIC TERMINAL CO., LTD					
					FINISH	SEE TABLE							
					WIRE RANGE								
					INSULATION								
								CLASS					
								TYPE					
LTR	REVISION RECORD				DR.	CHK.	APP.	DATE	TOLERANCE KEYOFF	SEE TABLE	SCALE 2/1	PART NO.	MG665659-5
DR.	KDR, '13.12.18				CHK.	JBS, '13.12.19				PART NAME	TURN SIGNAL SOCKET ASS'Y (DOUBLE)		
CHK.					APP.	CWK, '13.12.19							