
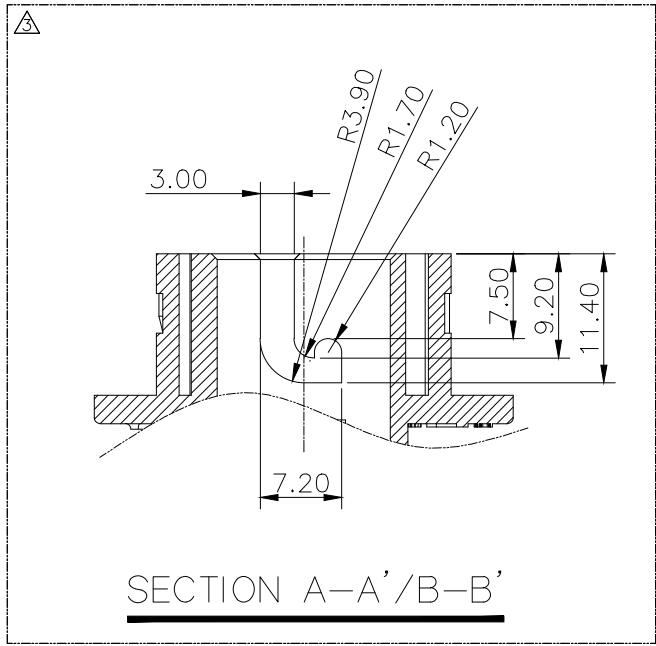
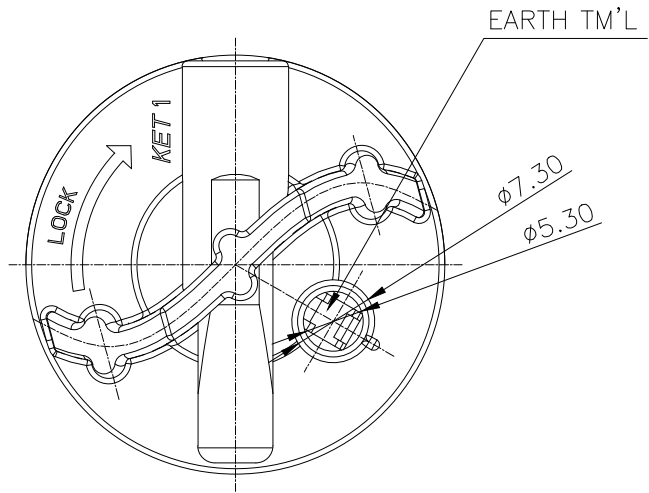
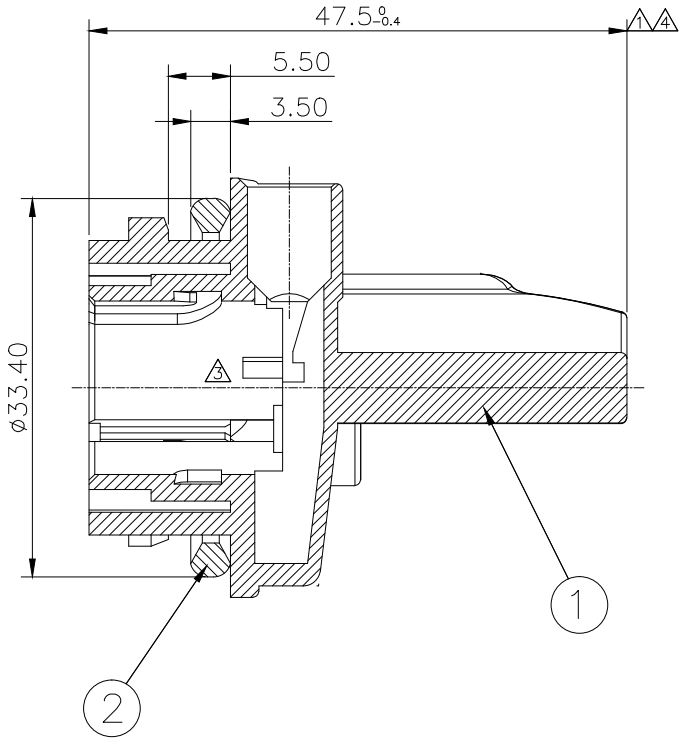
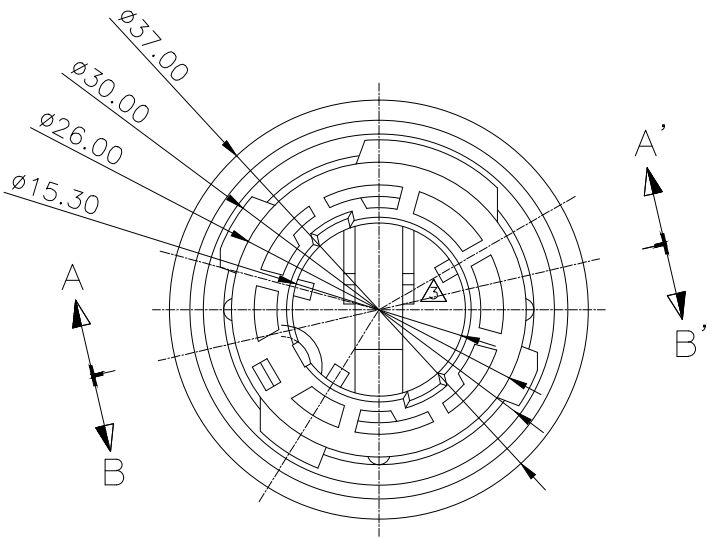


ISO VIEW

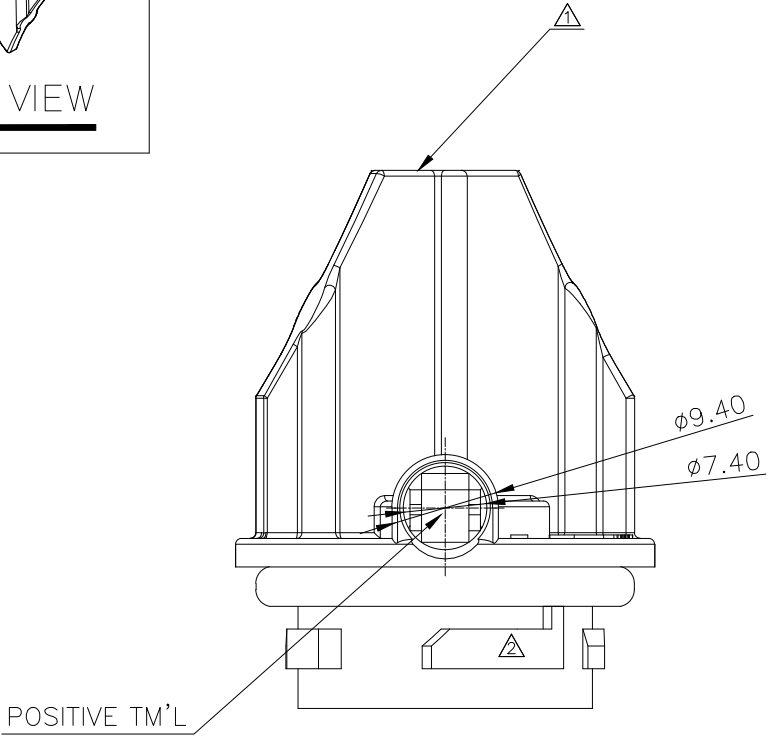



주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을 것.
- GASKET SEAL 접촉에 PARTING LINE등이 없을 것.
- 적용 TERMINAL: ST760794(P), ST760795(E)
- 적용 GASKET SEAL: R600104
- 적용 WIRE SEAL: MG682027(P), MG682028(E)
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- FLASH ARE NOT ALLOWED ON CONTACT MOLDED PART OF GASKET SEAL
- APPLICABLE OF TERMINAL: ST760794(P), ST760795(E)
- APPLICABLE OF GASKET SEAL: R600104
- APPLICABLE OF WIRE SEAL: MG682027(P), MG682028(E)
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

GENERAL TOLERANCE (SILICONE RUBBER)						GENERAL TOLERANCE (HOUSING)										USED ON
0 TO 6	6 TO 10	10 TO 18	18 TO 30	30 TO 50	50 TO 80	10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	ECCENT	
±0.4	±0.5	±0.6	±0.8	±1.0	±1.2	±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.90	±1.4	±30'	0.1	

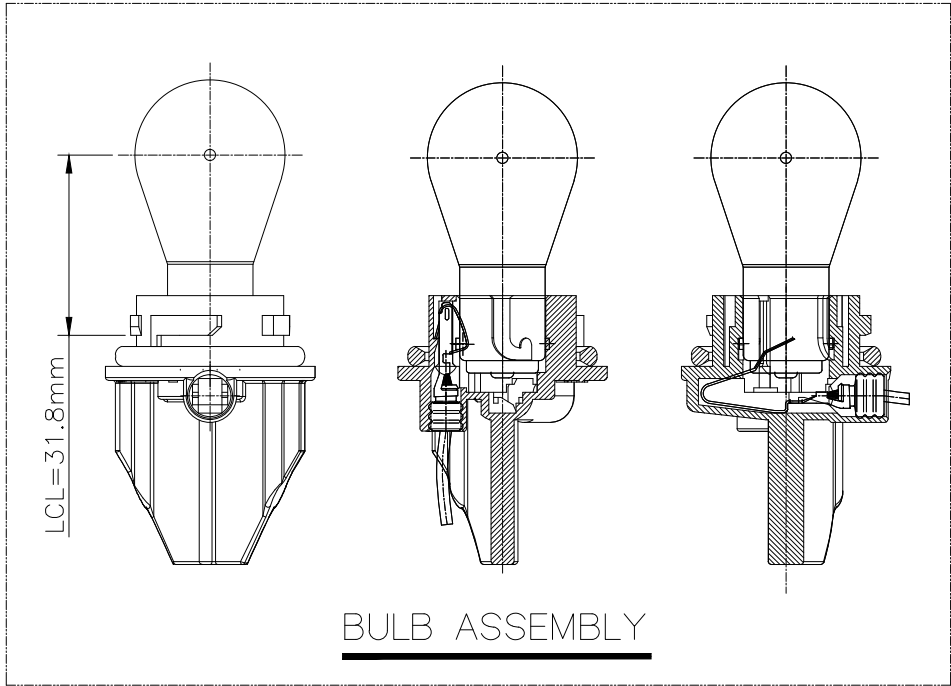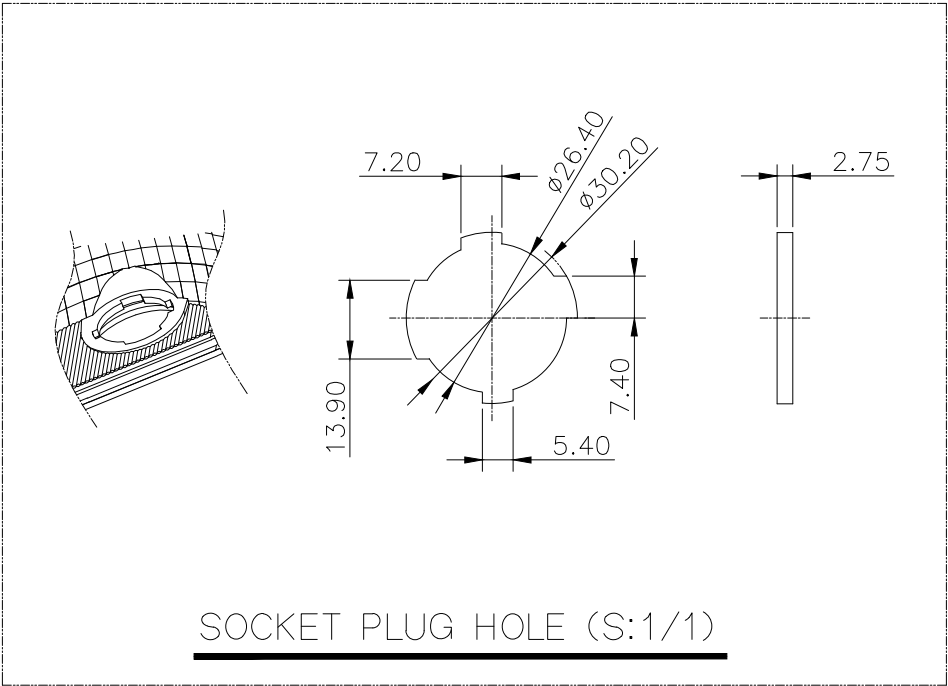

NO	PART NO	PART NAME	MATERIAL	FINISH
1	MG676127-41	RCL BULB HOLDER	PA66+MR30%	L/GRAY
2	R600104	RCL BULB HOLDER GASKET SEAL	SILICONE	BLACK

APPROVED

2018-12-11

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Develop
ment Team 3

ISSUE MARK

					MATERIAL	SEE TABLE		KOREA ELECTRIC TERMINAL CO., LTD.		
	ECO-1410-006에 근거	NKT	SSH	BIN	14.10.01	FINISH			SEE TABLE	
	ECO-1406-156에 근거	NKT	SSH	BIN	14.06.23	WIRE RANGE			CLASS	
	ECO-1405-171에 근거	NKT	SSH	BIN	14.05.27					
	ECO-1402-214에 근거	NKT	SSH	CWK	14.02.21	INSULATION	TYPE			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO.	MG665763-41
DR.	NKT. 2013.11.28	CHK. JBS. 2013.11.28				PART NAME				
CHK.		APP. CWK. 2013.11.28				RCL BULB HOLDER ASS'Y				