

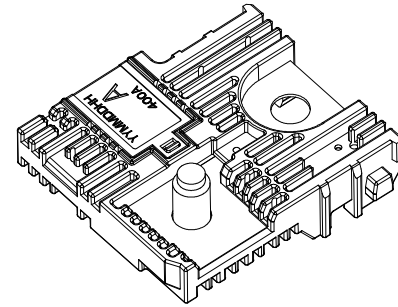
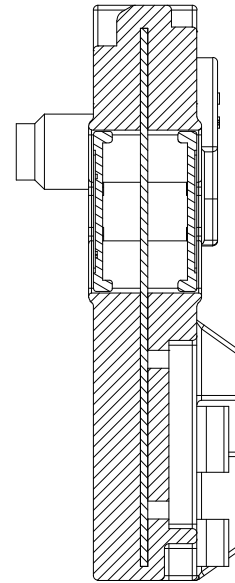
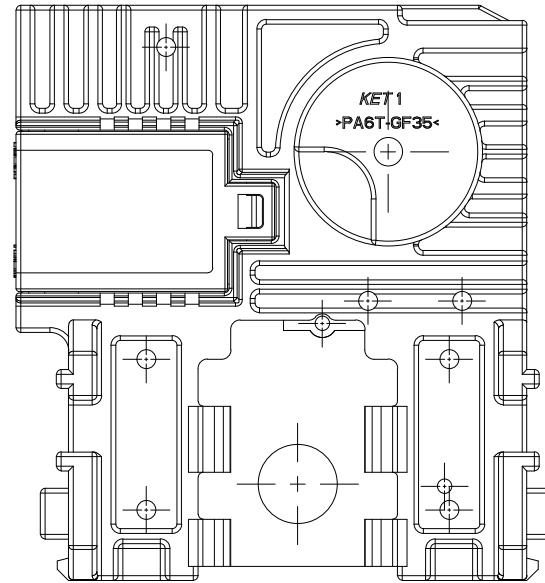


년도 월 일 시간
DETALE "Z"
(S= 5/1)

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

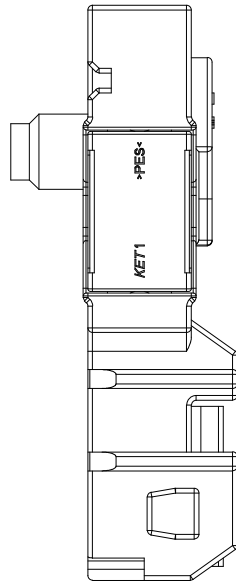

ISO VIEW

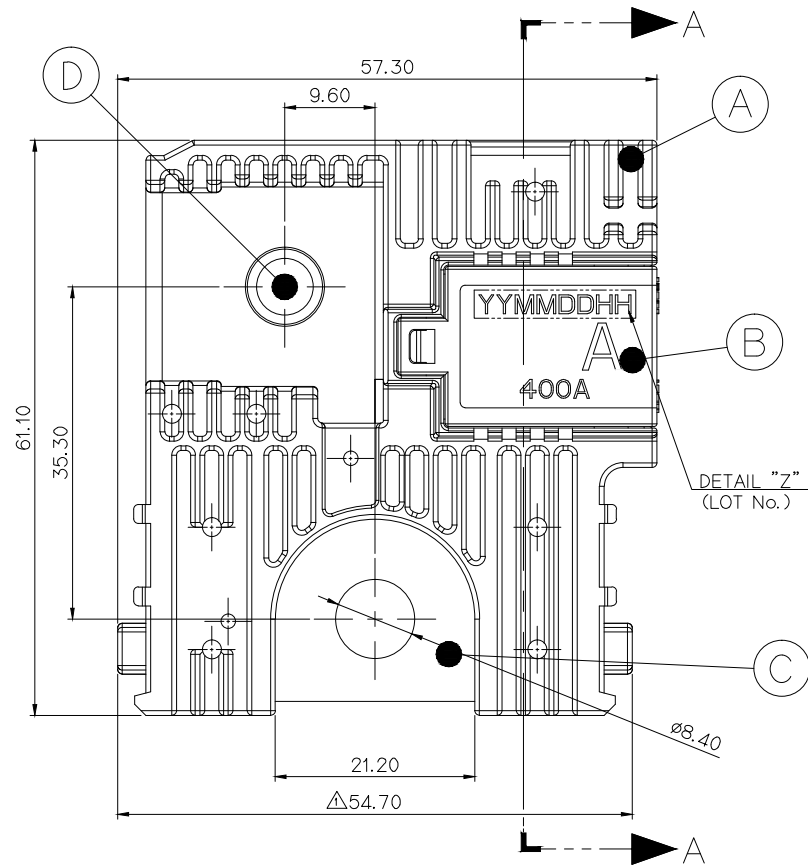

SECTION A-A

- NOTE**
- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
 - APPLICABLE BFT CAP : MG635746-1

ISSUE MARK

NO.	PART NAME	MATERIAL	FINISH
(A)	BFT 1P MAIN BODY	PA6T GF35	BLACK
(B)	BFT 1P ELEMENT COVER	PES	투명 BROWN
(C)	BFT 1P BUS-BAR	COPPER ALLOY	PRE-TIN
(D)	M8 BOLT	STEEL	PFZnNi5

					MATERIAL	SEE TABLE			
					FINISH	SEE TABLE			
△	Pilot 사항 고정에 따른 형상 변경	LKJ	OMS	KMK	01.DEC.'15				
△	BFT CAP 스토퍼 추가	LKJ	KMK	KH	24.APR.'15				
△	RELEASED	KJY	KMK	KH	25.FEB.'15				
CTR	REVISION RECORD	DR	CHK	APP	DATE	PREPARED BY	SCALE	PART NO.	
DR.		CHK				SEE TABLE	2/1	MG665807	
CHK		APP				PART NAME			
						BFT 1P 400A TYPE A ASSEMBLY (IP31)			

KET KOREA ELECTRIC
TERMINAL CO., LTD.

CLASS FUSE
TYPE A