

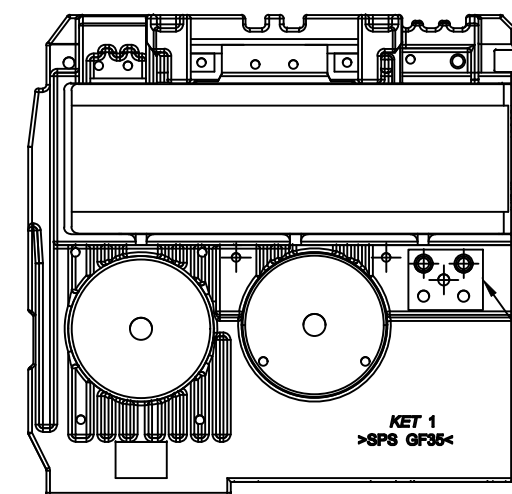
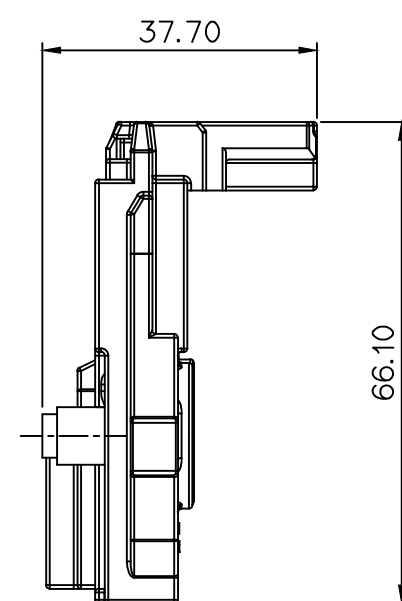


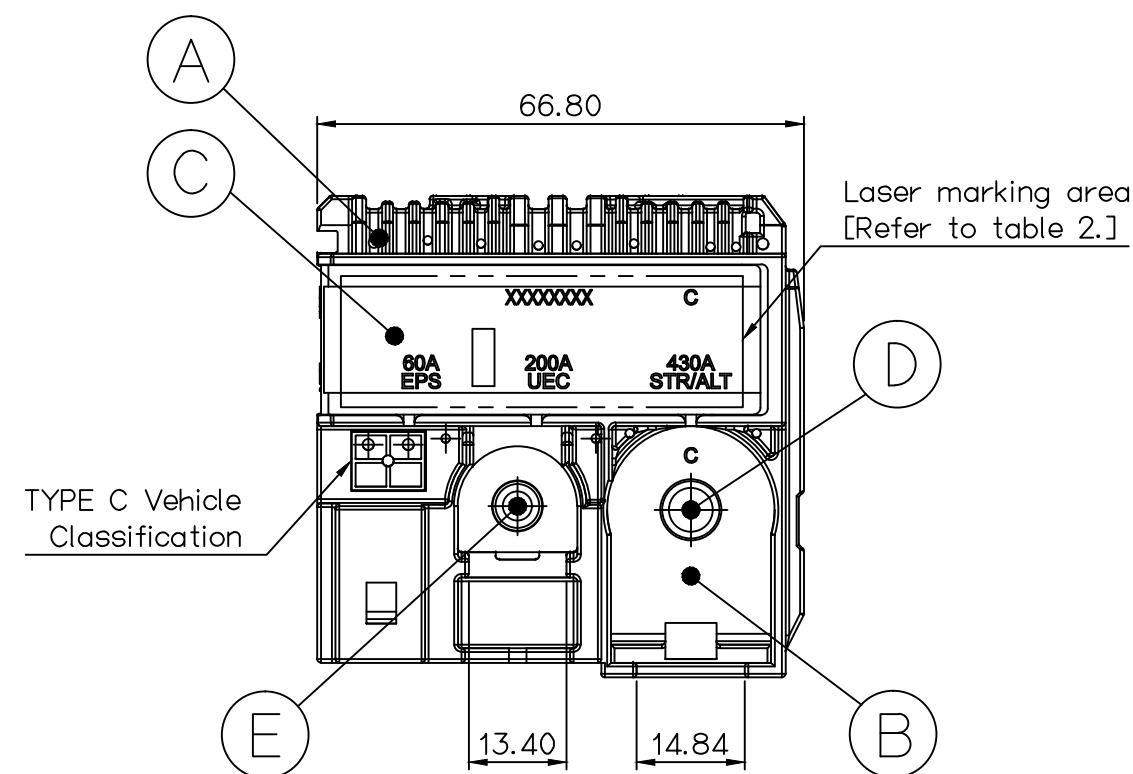

REAR

Vehicle	EPS	UEC	STR/ALT
TYPE A	80A	200A	300A
TYPE B	80A	200A	430A
TYPE C	60A	200A	430A

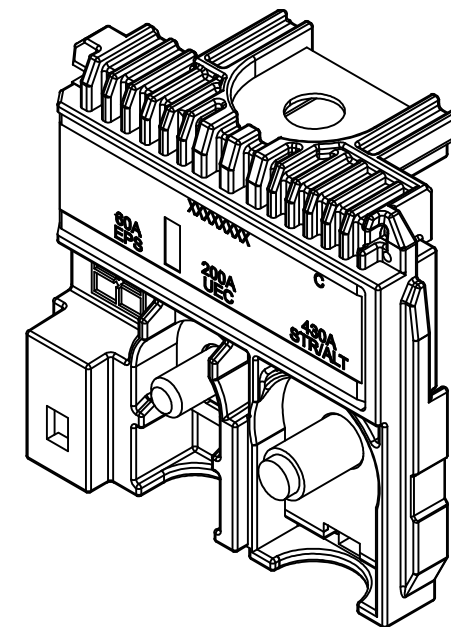

주 기

1. 기능상 유해한 BURR 및 FLASH 등이 없을것.
2. 적용 BFT CAP : MG635638-1(S3 EMT/S328),MG635639-1(K211)
3. ㉔ 적용 58L Connector : ST730722-3(Terminal),
MG613689(Plug housing), MG630660-4(Rear holder)
4. 차량 사양 : TABLE 2.
5. EPS/UEC Fuse Operating Time : ISO 8820-4 Table 5.
6. STR Fuse 430A Operating Time
- 800A : 3.5 - 35sec / 950A : 2.5 - 25sec

NOTE

1. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE BFT CAP : MG635638-1(S3 EMT/S328),MG635639-1(K21)
3. ⑤ APPLICABLE 58L Connector : ST730722-3(Terminal)
MG613689(Plug housing), MG630660-4(Rear holder)
4. Vehicle classification : Table 2.
5. EPS/UEC Fuse Operating Time : ISO 8820-4 Table 5.
6. STR Fuse 430A Operating Time
- 800A : 3.5 - 35sec / 950A : 2.5 - 25sec

NO.	PART NAME	MATERIAL	FINISH
Ⓐ	BFT 3P MAIN BODY TYPE C	SPS – GF35	BLACK
Ⓑ	BFT 3P BUS-BAR TYPE C	COPPER ALLOY	—
Ⓒ	BFT 3P ELEMENT COVER	PES	투명 BROWN
Ⓓ	M8 BOLT	STEEL	GMW4700
Ⓔ	M6 BOLT	STEEL	GMW4700

Nominal Diameter (mm)	Minimum Bolt Material Grade GMW25	Standard Toque All Metal PTN Nut driven (Nm)
6	8.8	D9.0+/-1.5NM
8	8.8	D22.0+/-3.0NM

						SPEC. NO.		ISSUE NO.	
						MATERIAL		SEE TABLE	
						FINISH		SEE TABLE	
						WIRE RANGE		CLASS	
						INSULATION		TYPE	
△	RELEASED	LDS	KMK	KH	30.APR.'15	TOLERANCE EXCEPT AS NOTED		SCALE	PART NO.
LTR	REVISION RECORD	DR	CHK.	APP.	DATE	SEE TABLE		1/1	MG665813
DR.		CHK.				PART NAME		BFT 3P MAIN BODY ASSEMBLY TYPE C	
CHK.		APP.							