

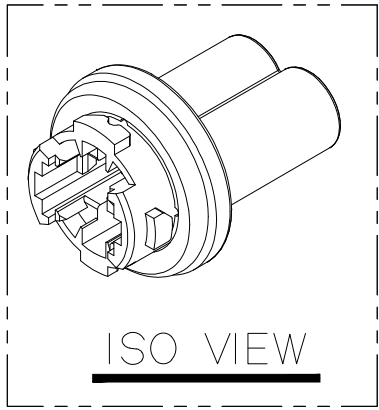
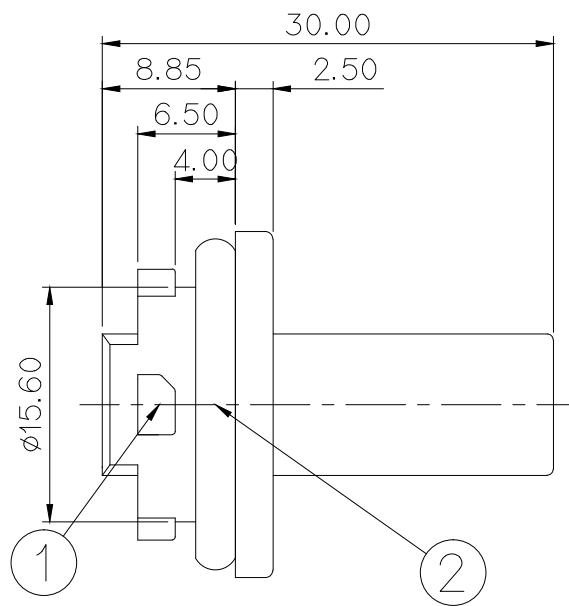


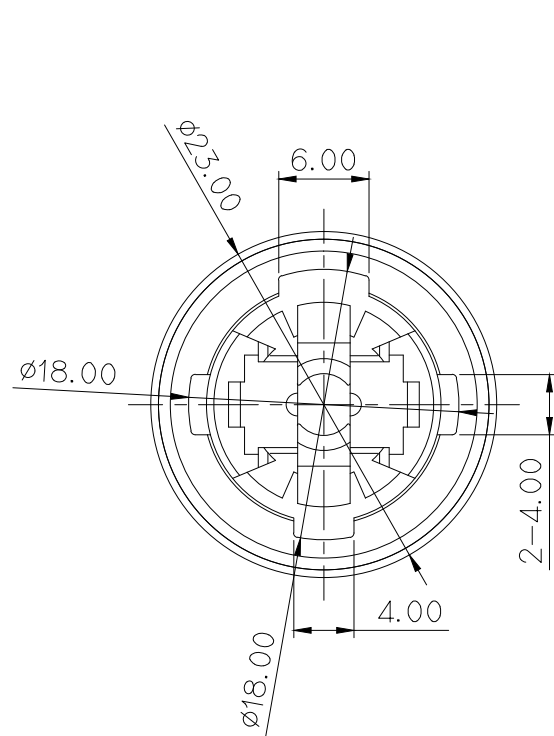


ISO VIEW

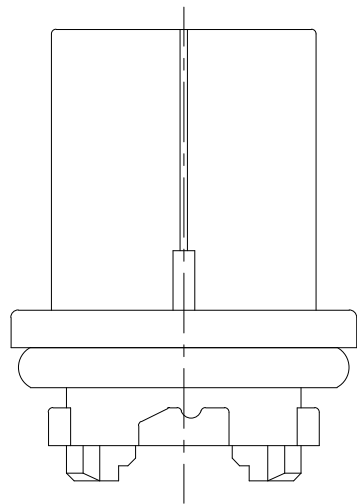


NO	PART NO.	PART NAME	U/S	MATERIAL	FINISH
1	MG635003-41	BACK-UP BULB HOLDER WP HS'G	1	PA66+MR30%	L/GRAY
2	R600112	LICENCE B/H SEAL GASKET-"B"	1	SILICONE	D/GREEN

GENERAL TOLERANCE (SILICONE RUBBER)							GENERAL TOLERANCE (HOUSING)							USED ON
0 TO 3	3 TO 6	6 TO 10	10 TO 18	18 TO 30	30 TO 50	50 TO 80	10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.3	±0.4	±0.5	±0.6	±0.8	±1.0	±1.2	±0.2	±0.3	±0.55	±0.95	±1.4	±30°	0.1	

NOTE : PLUG HOLE 일반공차 ±0.1

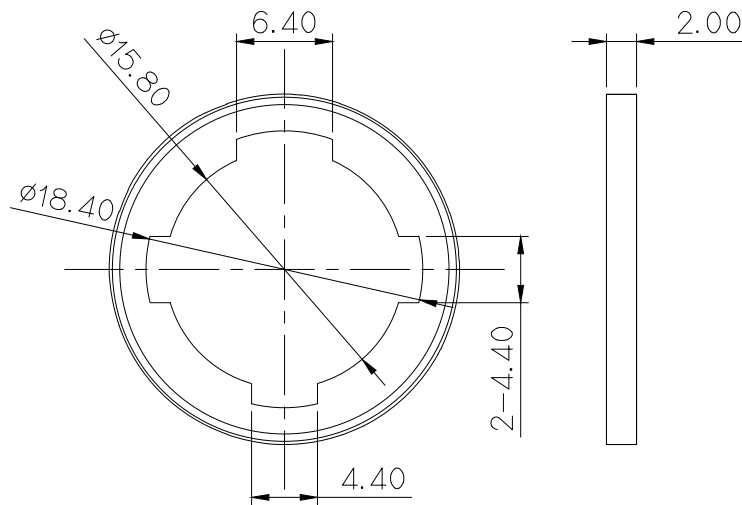

SOCKET PLUG HOLE

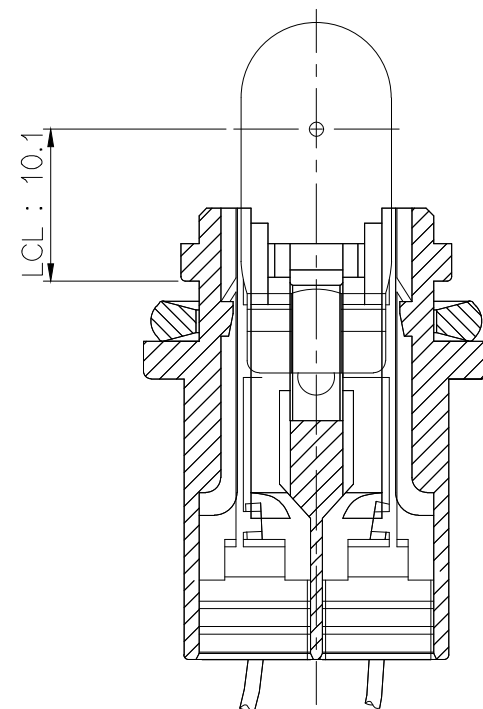

BULB ASSY

주기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 TERMINAL : ST780915
적용 WIRE SEAL : MG682027
적용 GASKET SEAL : R600112
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST780915
APPLICABLE WIRE SEAL : MG682027
APPLICABLE GASKET SEAL : R600112
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY,CADMIUM,HEXAVALENT CHROMIUM,PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL	SEE TABLE		KOREA ELECTRIC TERMINAL CO., LTD.			
					FINISH	SEE TABLE					
					WIRE RANGE	SEE TABLE			CLASS	—	
					INSULATION	SEE TABLE			TYPE	방수	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO.	MG665832-41
DR. PSJ 2016.01.19			CHK. NKT 2016.01.26			PARTNAME					
CHK. KMH 2016.01.26			APP. BIN 2016.01.26			BACK-UP BULB WP 2F ASSY					