

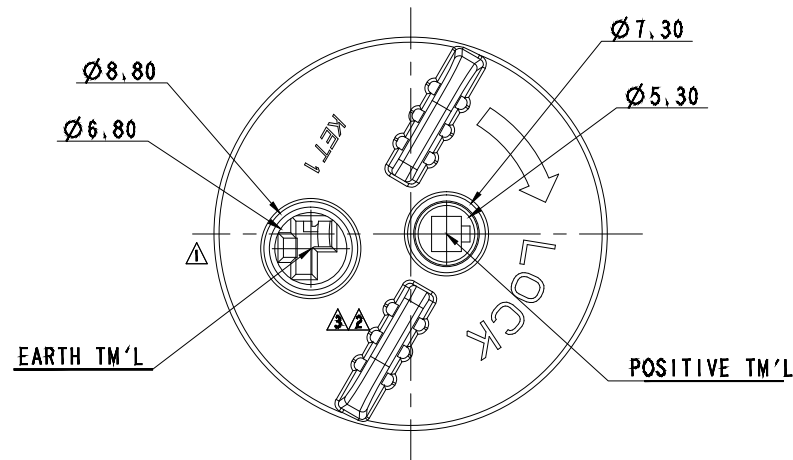
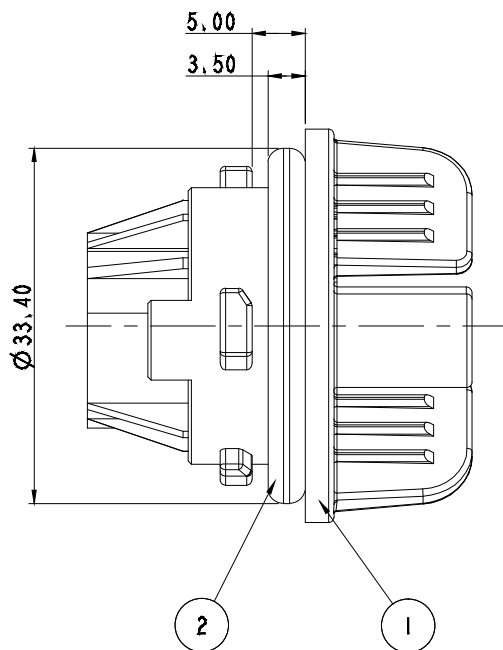
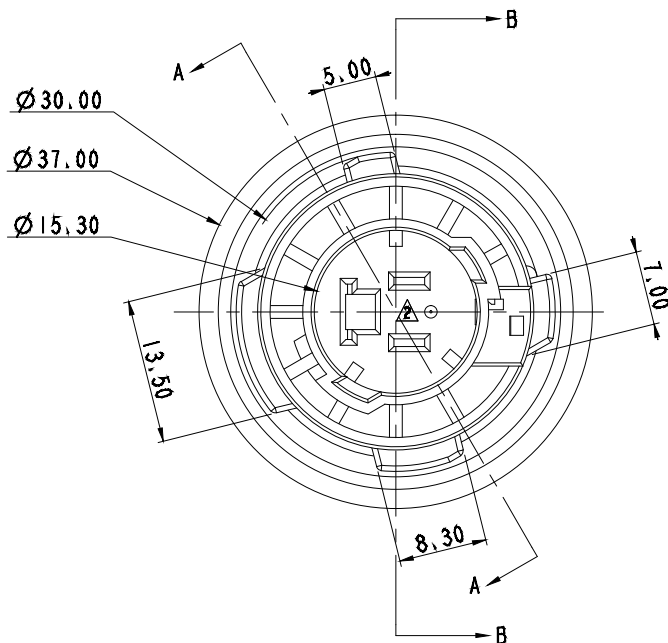
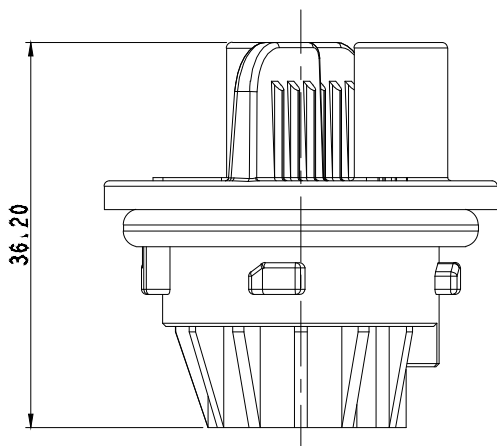


ISO VIEW

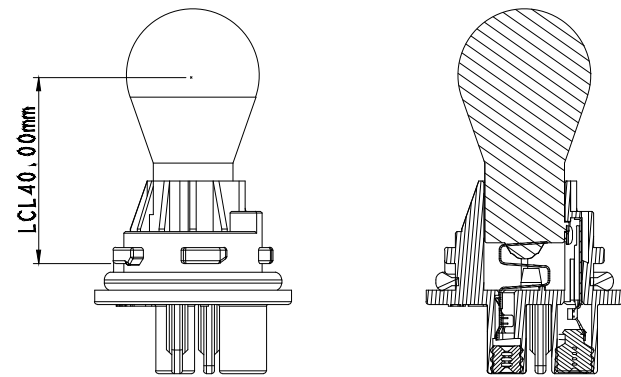

GENERAL TOLERANCE (SILICONE RUBBER)						GENERAL TOLERANCE (HOUSING)							USED ON
0 TO 6	6 TO 10	10 TO 18	18 TO 30	30 TO 50	50 TO 80	10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.4	±0.5	±0.6	±0.8	±1.0	±1.2	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

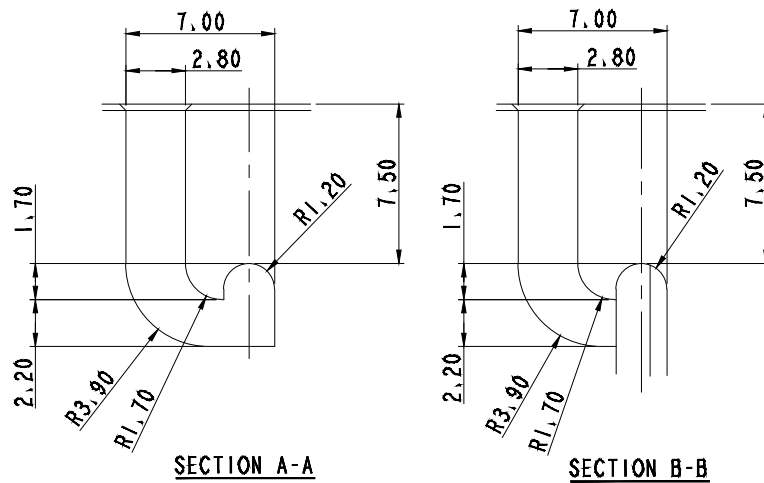

BULB ASSEMBLY

- 주 기
1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
 2. 적용 TERMINAL: ST781343-1(P), ST781344-1(E)
 3. 적용 GASKET SEAL: R600104
 4. 적용 WIRE SEAL: MG685413(P), MG685512(E)
 5. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

- NOTE
1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION,
 2. APPLICABLE TERMINAL: ST781343-1(P), ST781344-1(E)
 3. APPLICABLE GASKET SEAL: R600104
 4. APPLICABLE WIRE SEAL: MG685413(P), MG685512(E)
 5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO	PART NO	PART NAME	MATERIAL	FINISH
1	MG676615-7 (MG635771-7)	N-RCL BULB SOCKET(SINGLE)	PA66+MF30%	BROWN
2	R600104	GASKET SEAL	SILICONE	BLACK



ISSUE MARK

				MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
				FINISH	SEE TABLE	
				WIRE RANGE		
				INSULATION		
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	CLASS
DR.	NKT 16, 01, 29	CHK.	KMH 16, 01, 29			TYPE
CHK.		APP.	BIN 16, 01, 29			WP
				PART_NAME	N-RCL BULB SOCKET ASSY(SINGLE)	
				SCALE	2/1	PART NO.
						MG665833-7