
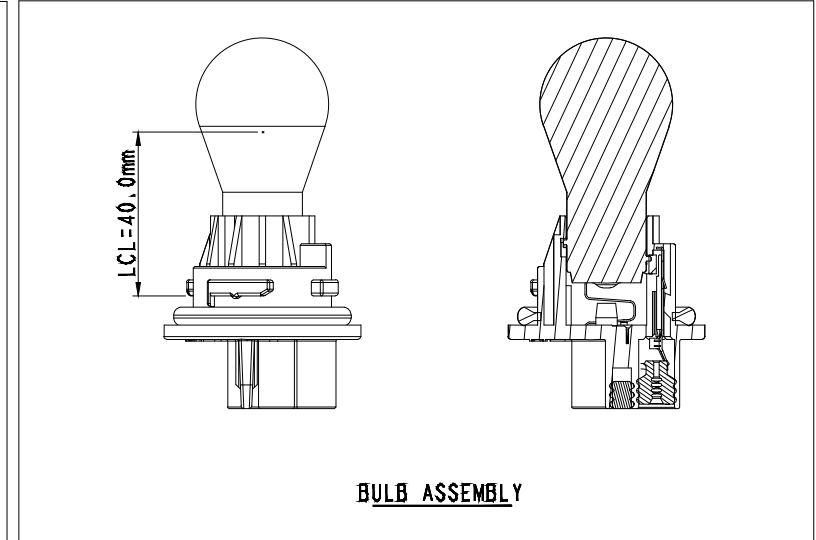
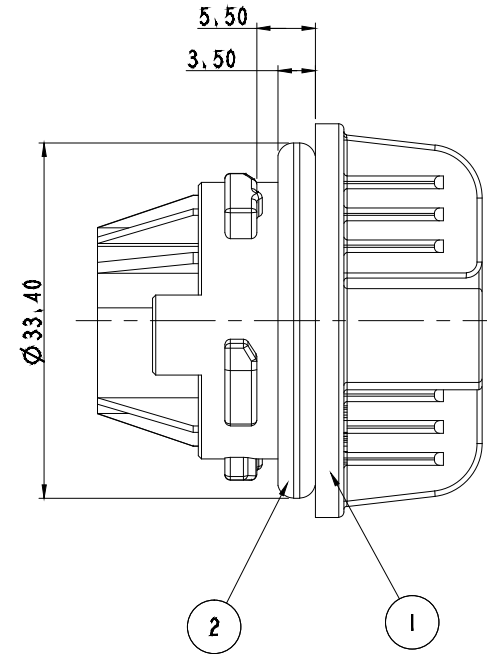
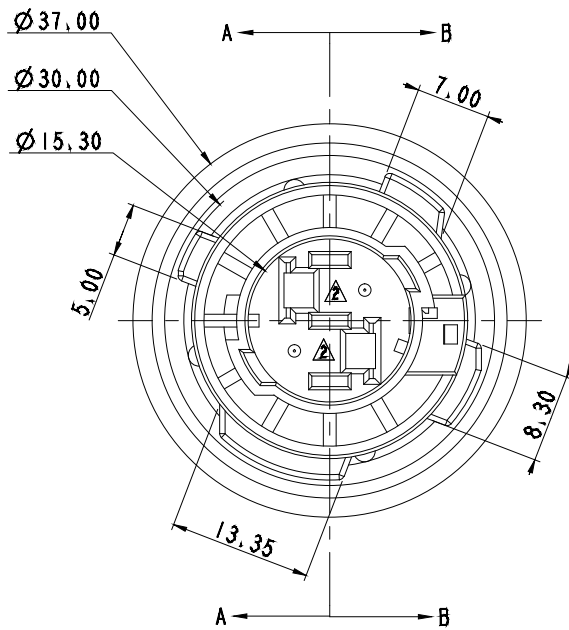




APPROVED
2019-11-06
KOREA ELECTRIC TERMINAL CO., LTD. Korea Electric Te rminal Co., LTD.

NOTE

1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL: ST781343-1(P), ST781344-1(E)
3. APPLICABLE GASKET SEAL: R600104
4. APPLICABLE WIRE SEAL: MG685413(P), MG685512(E)
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

				MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.	
				FINISH SEE TABLE			
③	ECO-1612-473메 근거 도면 재작성	YDH-LSY	SUK	17, 01, 16	WIRE RANGE	CLASS	
②	ECO-1609-114메 근거 도면 재작성	YDH-LSY	SUK	16, 09, 09	INSULATION	TYPE WP	
①	ECO-1605-234메 근거 도면 재작성	NKT-KWH	BIN	16, 06, 21			
LTR	REVISION RECORD	DR,	CHK,	APP,	DATE	SCALE 2/1	PART NO. MG665834-7
DR, NKT 16, 01, 29		CHK, KWH 16, 01, 29					
CHK,		APP, BIN 16, 01, 29		PART-NAME		N-RCL BULB SOCKET ASSY(DOUBLE)	