

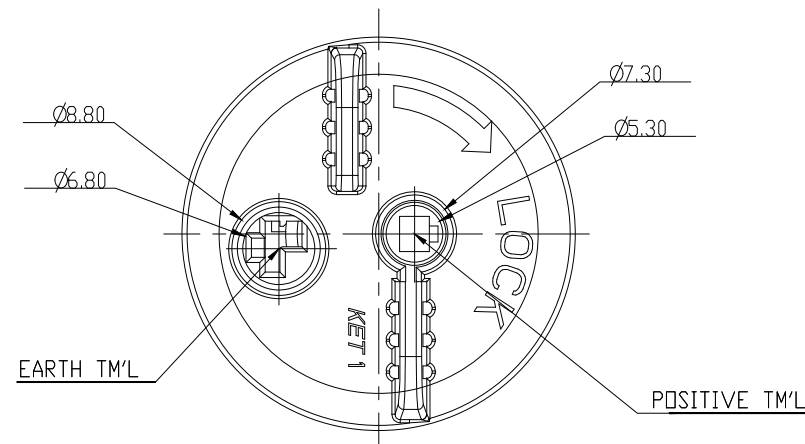
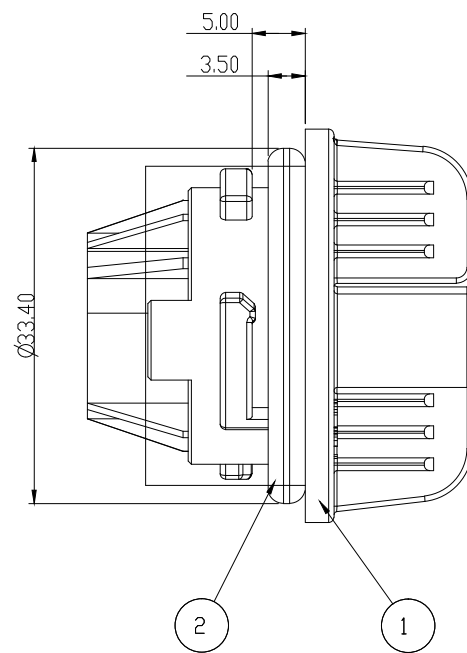
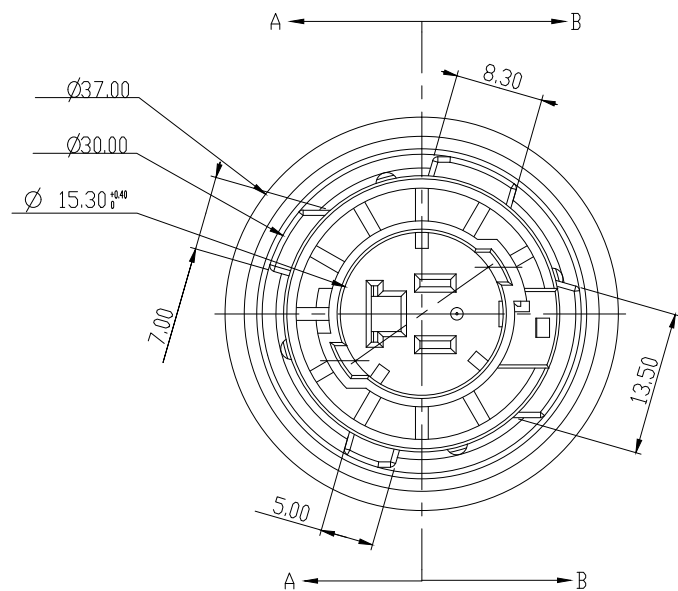
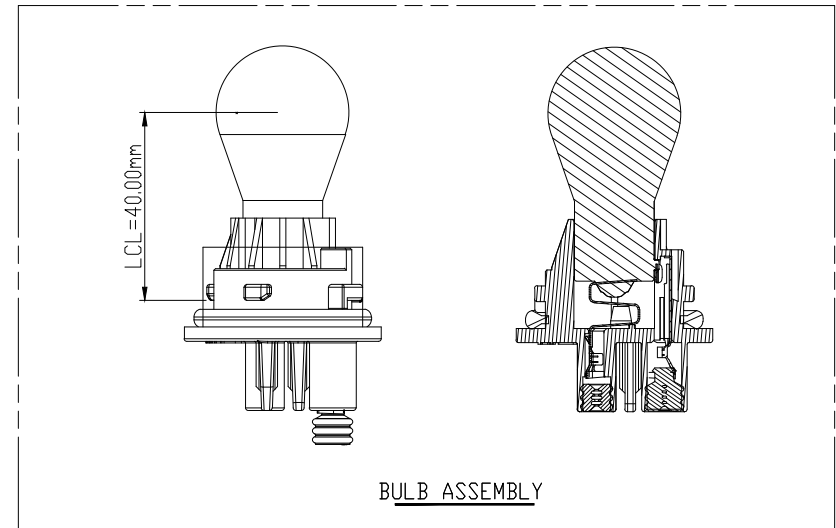
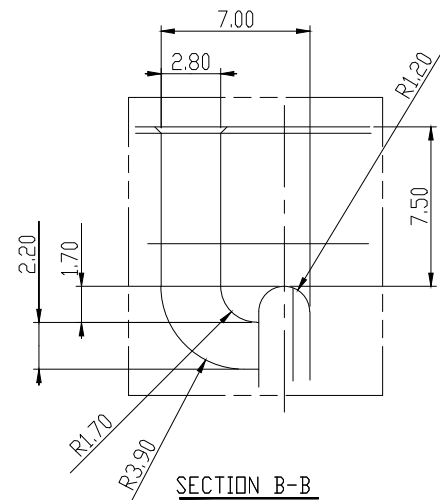


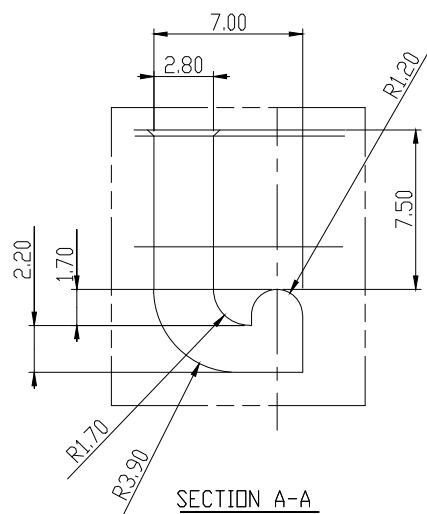

GENERAL TOLERANCE (SILICONE RUBBER)						GENERAL TOLERANCE (HOUSING)							USED ON
0 TO 6	6 TO 10	10 TO 18	18 TO 30	30 TO 50	50 TO 80	10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.4	±0.5	±0.6	±0.8	±1.0	±1.2	±0.2	±0.3	±0.55	±0.95	±1.40	±30'	0.1	

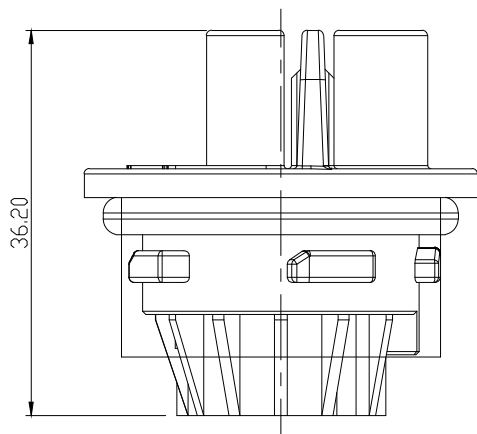

NO	PART NO	PART NAME	MATERIAL	FINISH
1	MG676694-41 (MG635795-41)	N-RCL BULB SOCKET(SINGLE 180±LCL40mm)	PA66+MF30%	L-GRAY
2	R600104	GASKET SEAL	SILICONE	BLACK

ISSUE MARK

주 기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
2. 적용 TERMINAL: ST781343-1(P), ST781344-1(E)
3. 적용 GASKET SEAL: R600104
4. 적용 WIRE SEAL: MG685413(P), MG685512(E)
5. 제품상 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL: ST781343-1(P), ST781344-1(E)
3. APPLICABLE GASKET SEAL: R600104
4. APPLICABLE WIRE SEAL: MG685413(P), MG685512(E)
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHOULD NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

						MATERIAL	SEE TABLE	KIET ENGINEERED	KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH	SEE TABLE		
						VIRE RANGE		CLASS	
						INSULATION		TYPE WP	
 L.T.R	중시형착서 불력에 따른 도면 재작 을 (ECO-1704-027 3/27)	JHK	CHK	SUK	17.04.03	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO. MG665850-41
	REVISION RECORD	DR	CHK.	APP.	DATE				
DR. NKT 16. 06. 07		CHK. KMH 16.06.10				PART_NAME		N-RCL BULB SOCKET ASSY(SINGLE 180±LCL40mm)	
CHK.		APP. BIN 16.06.10							