


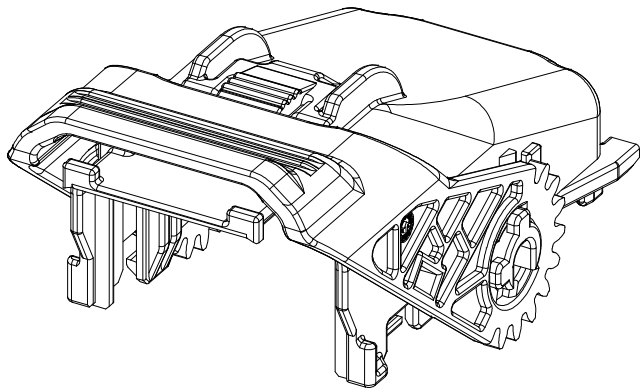
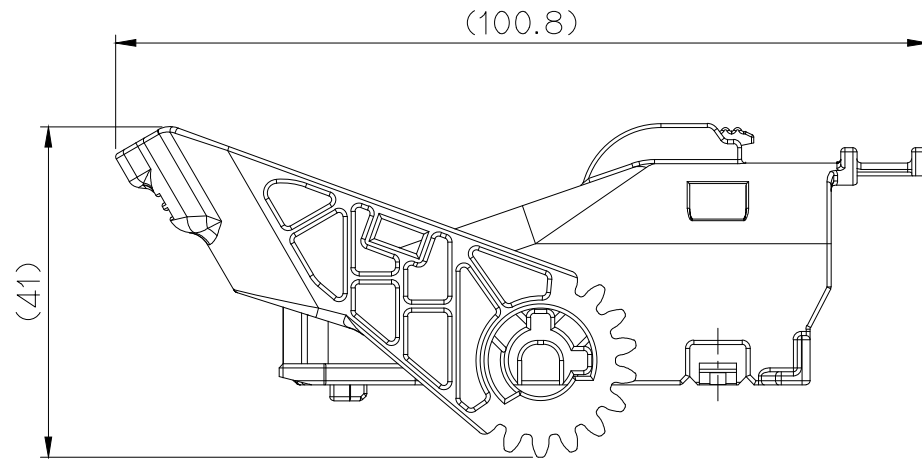
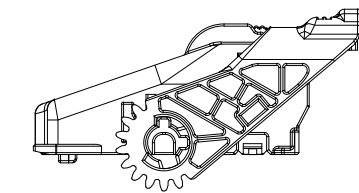
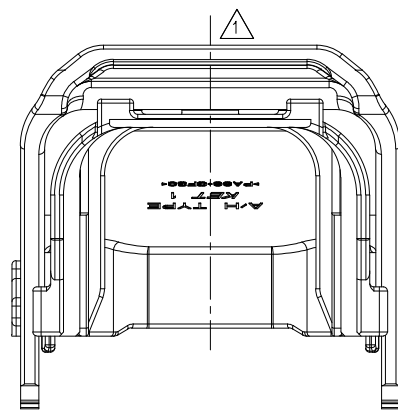


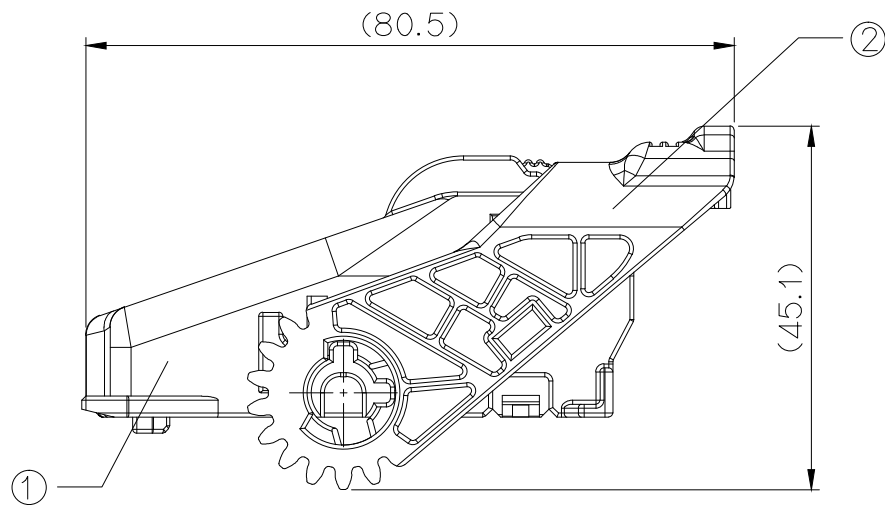

ISO VIEW

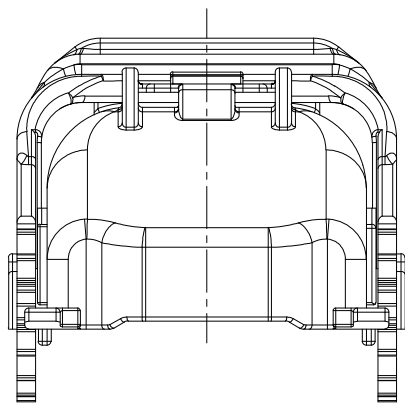

< LEVER OPEN >

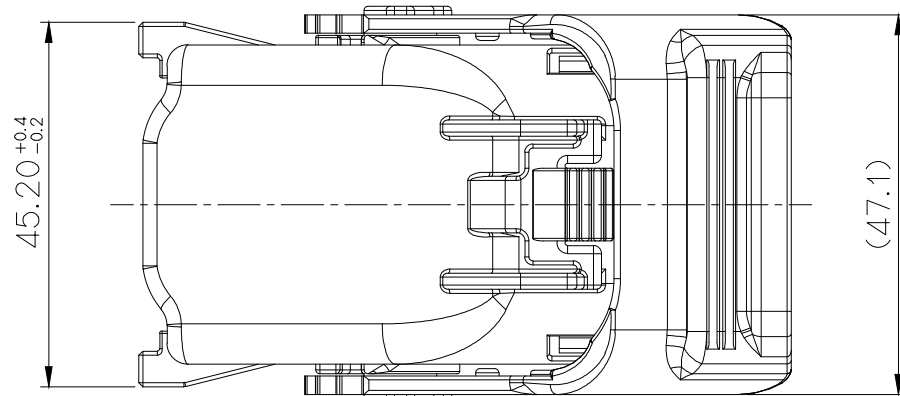

DELIVERY CONDITION
(CLOSED LEVER)

PART LIST

NO.	PART NAME	PART No	MATERIAL	COLOR	QTY	REMARKS
1	PCU 91F&105F COVER(A)	MG676832-5	PA66-GF30	BLACK	1	
2	PCU 91F&105F LEVER(A)	MG674657-5A	PA66-GF30	BLACK	1	

GENERAL TOLERANCE (HOUSING)									USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.90	±1.40	±30'	

주 기

1. 기능상 유해한 BURR 및 WELDLINE등이 없을 것.
2. 본 부품은 MG654648-5, MG654659-5 구성품이다.
3. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
4. 상측 표면 수평 방향 COVER GRAIN STYLE : HT 86 - 100%
상측 표면 수직 방향 COVER GRAIN STYLE : HT 86 - 70%

NOTE



1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- 2.THIS PART IS ONE OF COMPONENTS OF MG654648-5, MG654659-5
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD MERCURY,CADMIUM,HEXAVALENT CHROMIUM, PPBs,PPDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.
4. COVER HORIZONTAL SURFACE GRAIN STYLE : HT 86-100%
COVER VERTICAL SURFACE GRAIN STYLE : HT 86-70%

APPROVED

2019-11-05

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL		SEE TABLE	 KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
						FINISH		SEE TABLE		
						WIRE RANGE				CLASS
	ECO-1703-346 근거 도면 변경 (LEVER 후면 형상 변경)	KJS	KMH	CJH	2017.03.24	INSULATION			TYPE	
	검보 합격에 따른 도면 재작성	KJS	KMH	LSY	2016.11.14	TOLERANCE EXCEPT AS NOTED		SEE TABLE	SCALE	1/1
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NO.		MG665874-5		
DR.	KJS. 2016.11.14	CHK.				PART NAME				
CHK.	KMH. 2016.11.14	APP. LSY. 2016.11.14				PCU/ECU 91F&105F COVER ASSY (A)				