


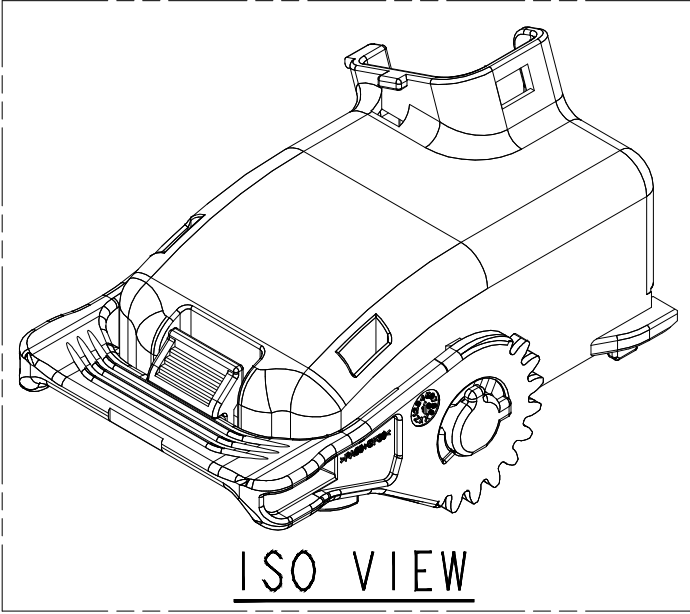


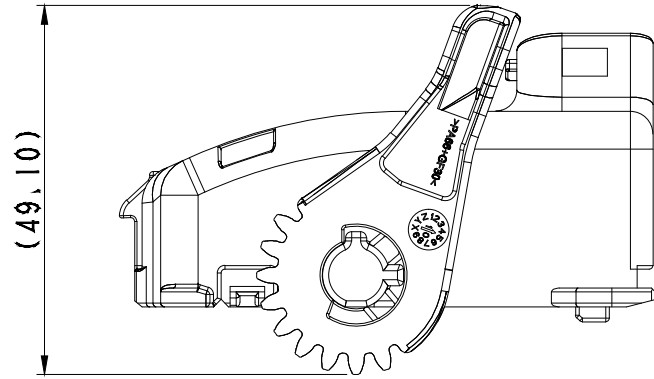

ISO VIEW

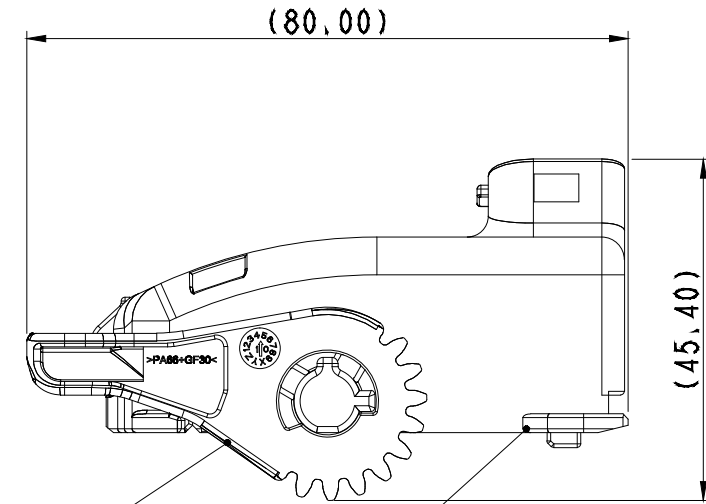

LEVER OPEN

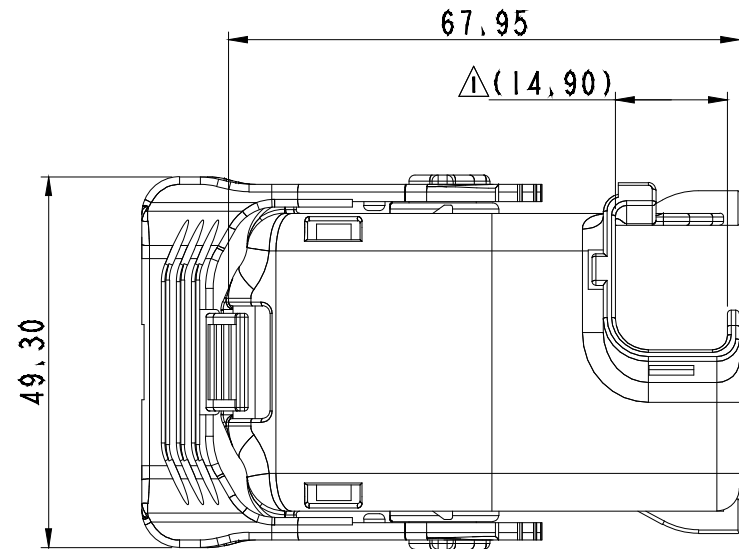

2

1

NO	PART NAME	PART NO	MATERIAL	COLOR	QTY
1	ECU/PCU 91F/105F COVER(J)	MG676866-5	PA66-GF30	BLACK	1EA
2	ECU/PCU 91F/105F LEVER(C)	MG676307-5	PA66-GF30	BLACK	1EA

GENERAL TOLERANCE (HOUSING)


10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250VR	ANGLE	USED ON
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.90	±1.4	±30'	

주 기


1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것,
2. 상측 표면 수평 방향 COVER GRAIN STYLE ; HT86-100%
상측 표면 수직 방향 COVER GRAIN STYLE ; HT86-70%
3. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다,
4. 본 부품은 MG654648, MG654659 구성품이다,

NOTE

1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION,
2. COVER HORIZONTAL SURFACE GRAIN STYLE ; HT86-100%
COVER VERTICAL SURFACE GRAIN STYLE ; HT86-70%
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION,
4. THIS PART IS ONE OF COMPONENTS OF MG654648, MG654659

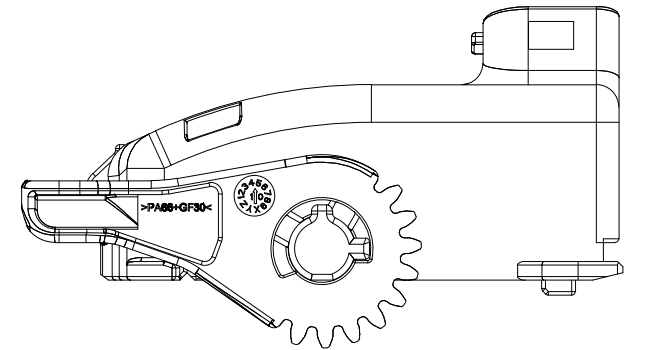

DELIVERY CONDITION
CLOSED LEVER

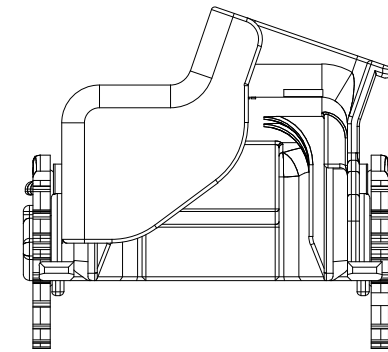

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH	SEE TABLE		
					WIRE RANGE		CLASS	
	회이어 원통구 치수 추가(ECO-1706-278 근거)	HYJ	LIN	SUK	2017.06.22	INSULATION	TYPE	
	도면 이관 (개별 양산)	HYJ	LIN	SUK	2017.06.18			
LTR	REVISION RECORD	DR,	CHK,	APP,	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1	PART NO. MG665880-5
DR, JDR 2017.02.15		CHK,				PART_NAME ECU/PCU 91F/105F COVER ASSY(J)		
CHK, SSH 2017.02.15		APP, BIN 2017.02.15						