


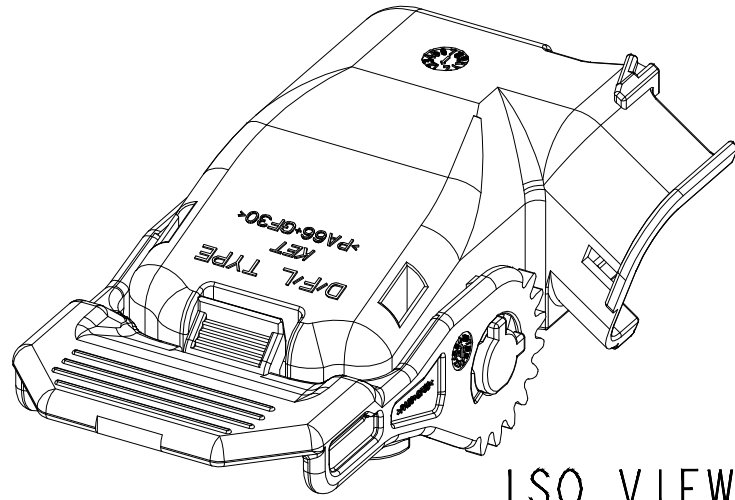





ISO VIEW

주 기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것,
2. 본 부품은 MG654648-5, MG654659-5와 조립된다,
3. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다,


NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION,
2. THIS PART IS ONE OF THE COMPONENT OF MG65448-5, MG654659-5
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION,

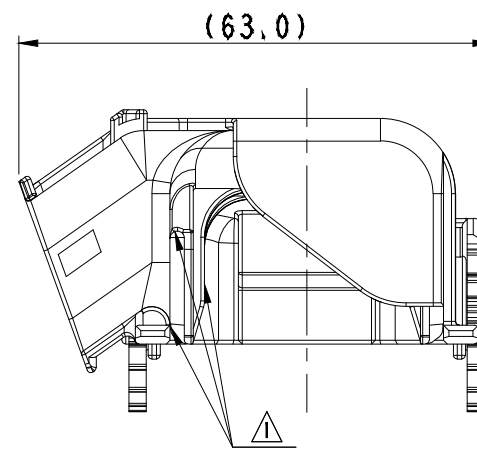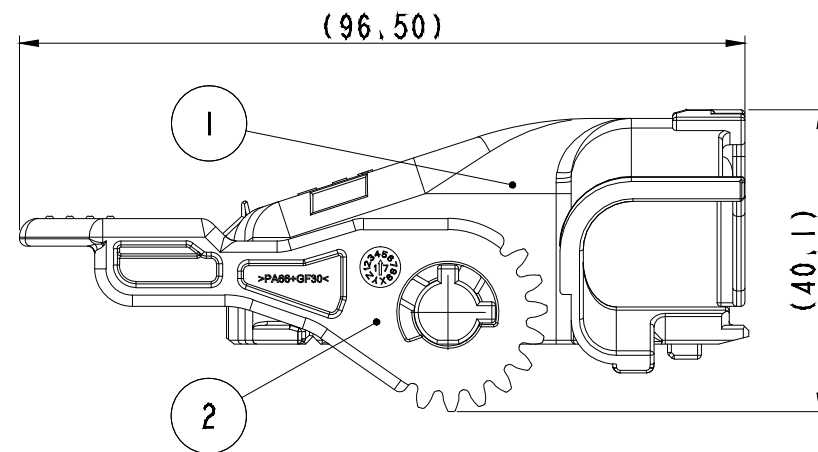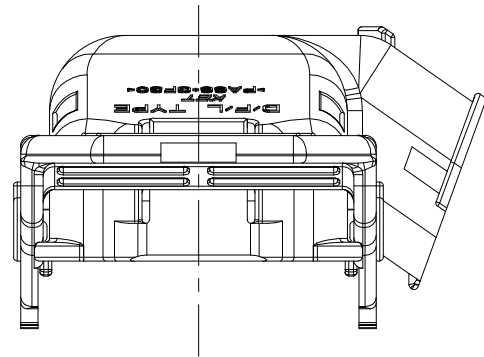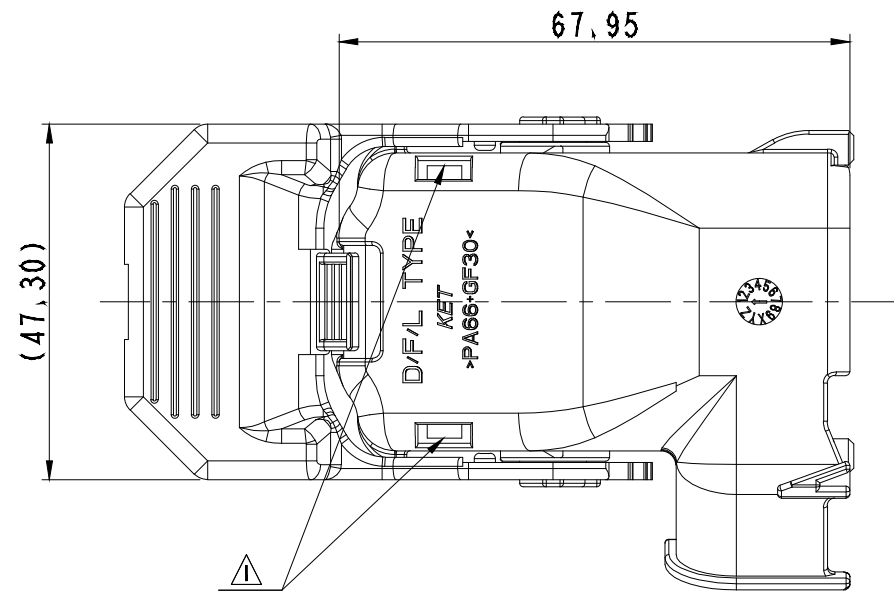


GENERAL TOLERANCE (HOUSING)

10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	USED ON
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

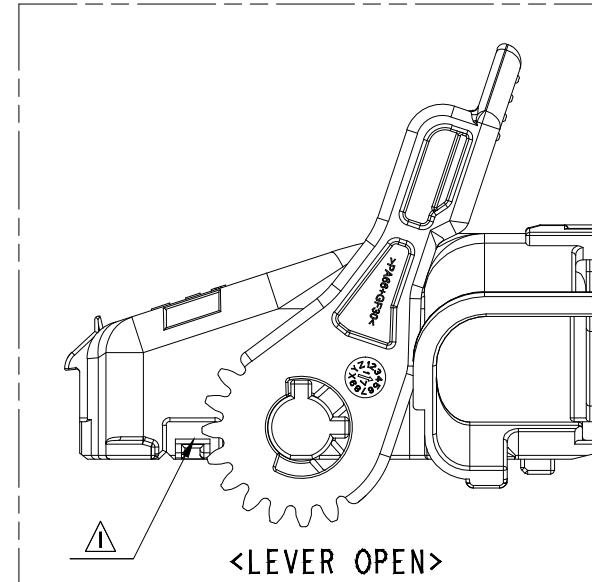

<LEVER OPEN>

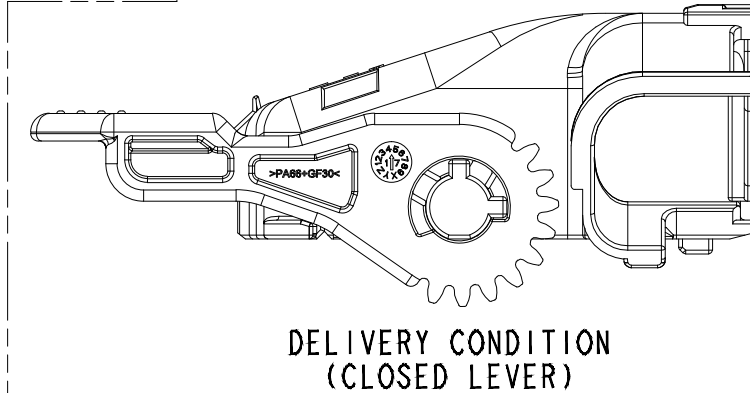DELIVERY CONDITION
(CLOSED LEVER)

NO.	MATERIAL	COLOR
0	PA66+GF30	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

NO.	PART NAME	PART NO	COLOR	Q'TY	REMARKS
1	PCU/ECU 91F&105F COVER(D)	MG675296-5	BLACK	1	
2	ECU/PCU 91&105F LEVER(E)	MG677005-5	BLACK	1	

					MATERIAL	SEE TABLE			
					FINISH	SEE TABLE			
					WIRE RANGE	-			
					INSULATION	-			
ECO-1906-265 근거 도면 제작성	LND	KSC	CJH	19.06.20					
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1	PART NO.	MG665898-5
DR, KCS '17.08.30		CHK, YSW '17.08.30							
CHK,		APP, SSH '17.08.30				PART_NAME	ECU/PCU 91&105F COVER ASSY (L)		

KOREA ELECTRIC
TERMINAL CO., LTD.

CLASS ECU/PCU

TYPE -