

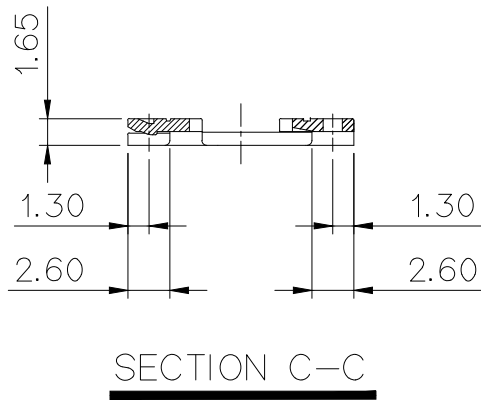
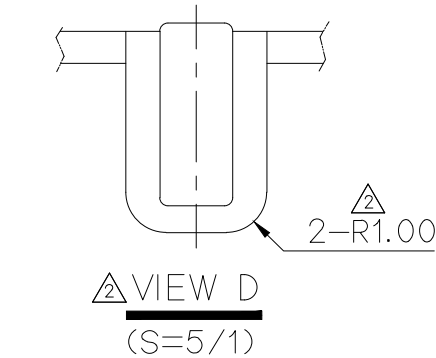

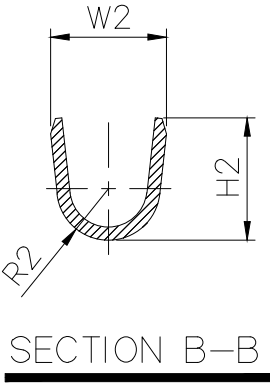


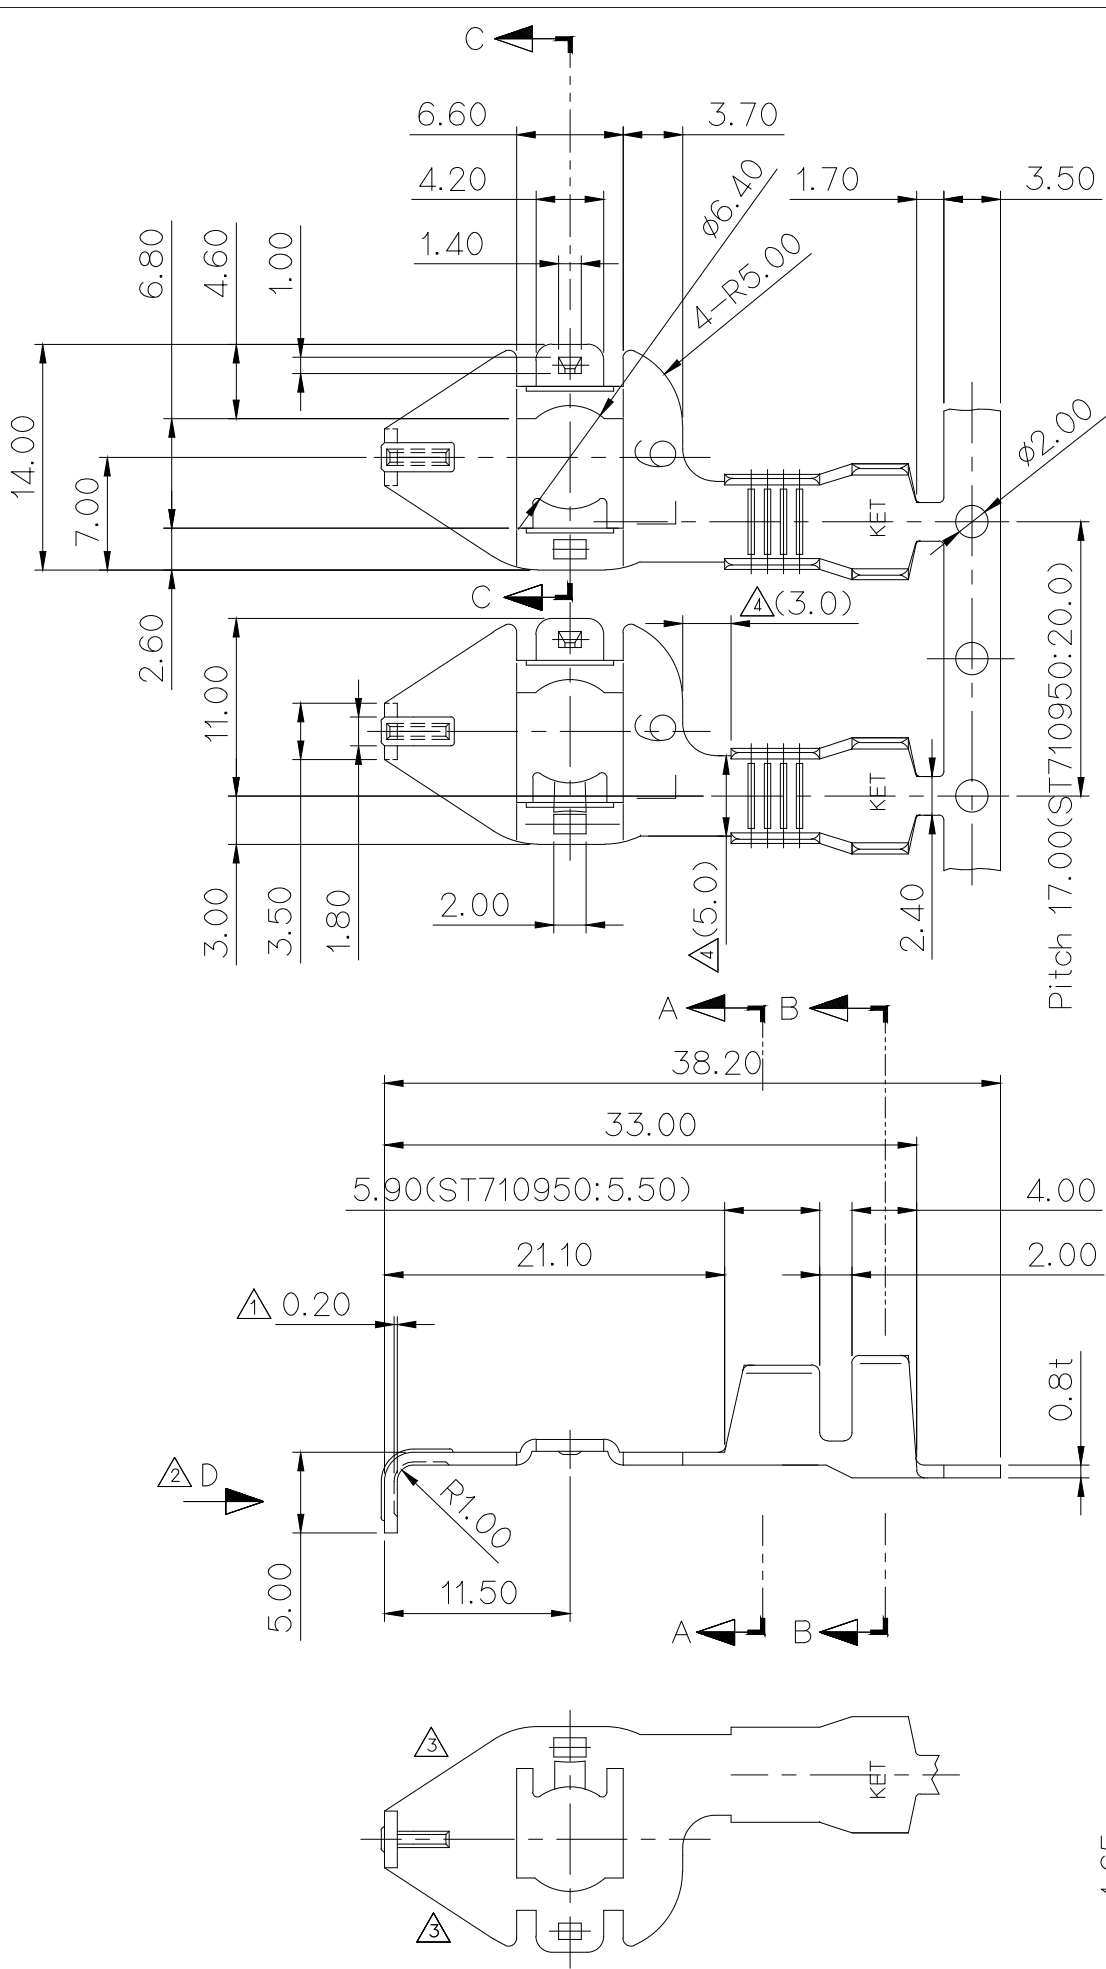

GENERAL TOLERANCE (TERMINAL)						USED ON
10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±0.5	±30'	0.1	

NO	PART NO	WIRE			INSULATION			WIRE RANGE (mm ²)	FINISH
		W1	H1	R1	W2	H2	R2		
1	ST710783-1	5.0	4.0	2.0	7.4	5.8	2.8	AVS 0.5 AVS 0.5×2	UNPLATE
	ST710783-2							AVS 0.85 AVS 1.25	TIN
	ST710783-3							AVS 0.5+0.85 AVSS0.5~1.25	PRE-TIN
2	ST710784-1	6.0	5.0	2.3	8.2	6.8	3.0	AVS 2.0 AVS 1.25×2	UNPLATE
	ST710784-2							AVS 0.5+1.25 AVSS 2.0	TIN
	ST710784-3							AVS 0.5+2.0 AVS 0.85+2.0	PRE-TIN

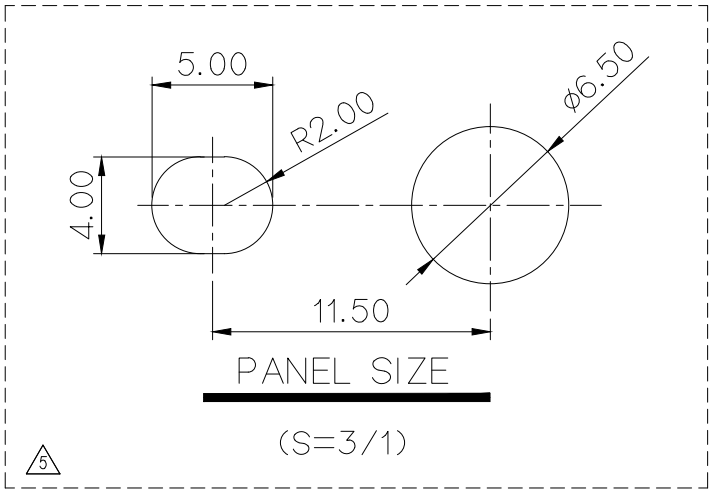

주 기

1. 지시하지 않은 R은 0.5로 할 것.
2. 기능상 유해한 BURR 및 변형등이 없을 것.
3. 적용 RIGHT TM'L NO. : ST710506,507,806
4. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.5 RADIUS.
2. MUST BE FREE OF FLASH, BURR AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE RIGHT TM'L NO.: ST710506,507,806
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

3	ECO-1206-022 근거 도면변경	HSR			'12.06.08	MATERIAL	BRASS	 KOREA ELECTRIC TERMINAL CO., LTD.
4	설계사양변경(S100311)근거 도면 제작성	LHS	—	—	'10.12.03	FINISH	SEE TABLE	
3	설계사양변경(S060332)근거 도면제작성 (STOPPER 형상변경)	KBS	—	—	'06.12.12	WIRE RANGE	SEE TABLE	
2	설계사양변경(060297)근거 도면제작성 (STOPPER부 끝단 R추가)	YSW	—	—	'06.11.13	INSULATION		
1	시방변경 030103근거 제작성	HSW	—	—	'03.05.28			CLASS
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. ST710783,784
DR.	HEO 99.06.18	CHK.	—	—	06/18	PART NAME		
CHK.	— 06/18	APP.	—	—	06/18	ø6.4 EARTH RING TM'L LH-STOPPER(S,M,L)		

APPROVED

2016-03-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Development
Team 1

ISSUE MARK