

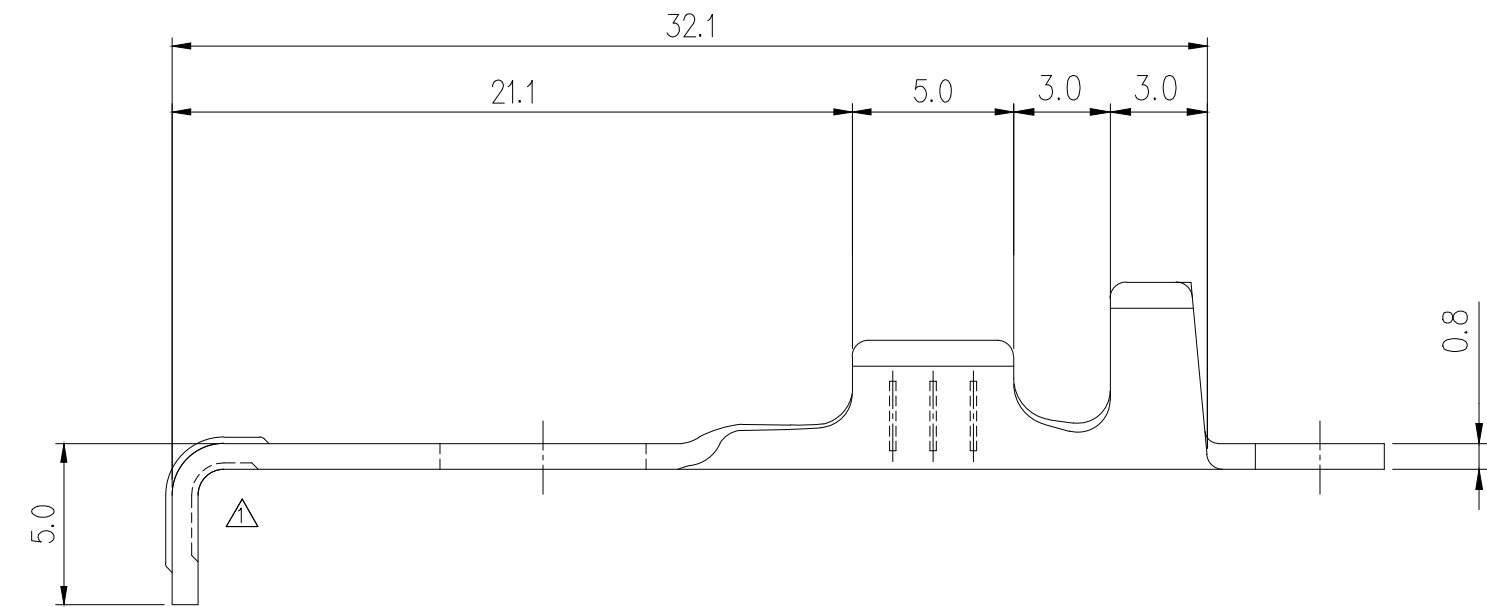


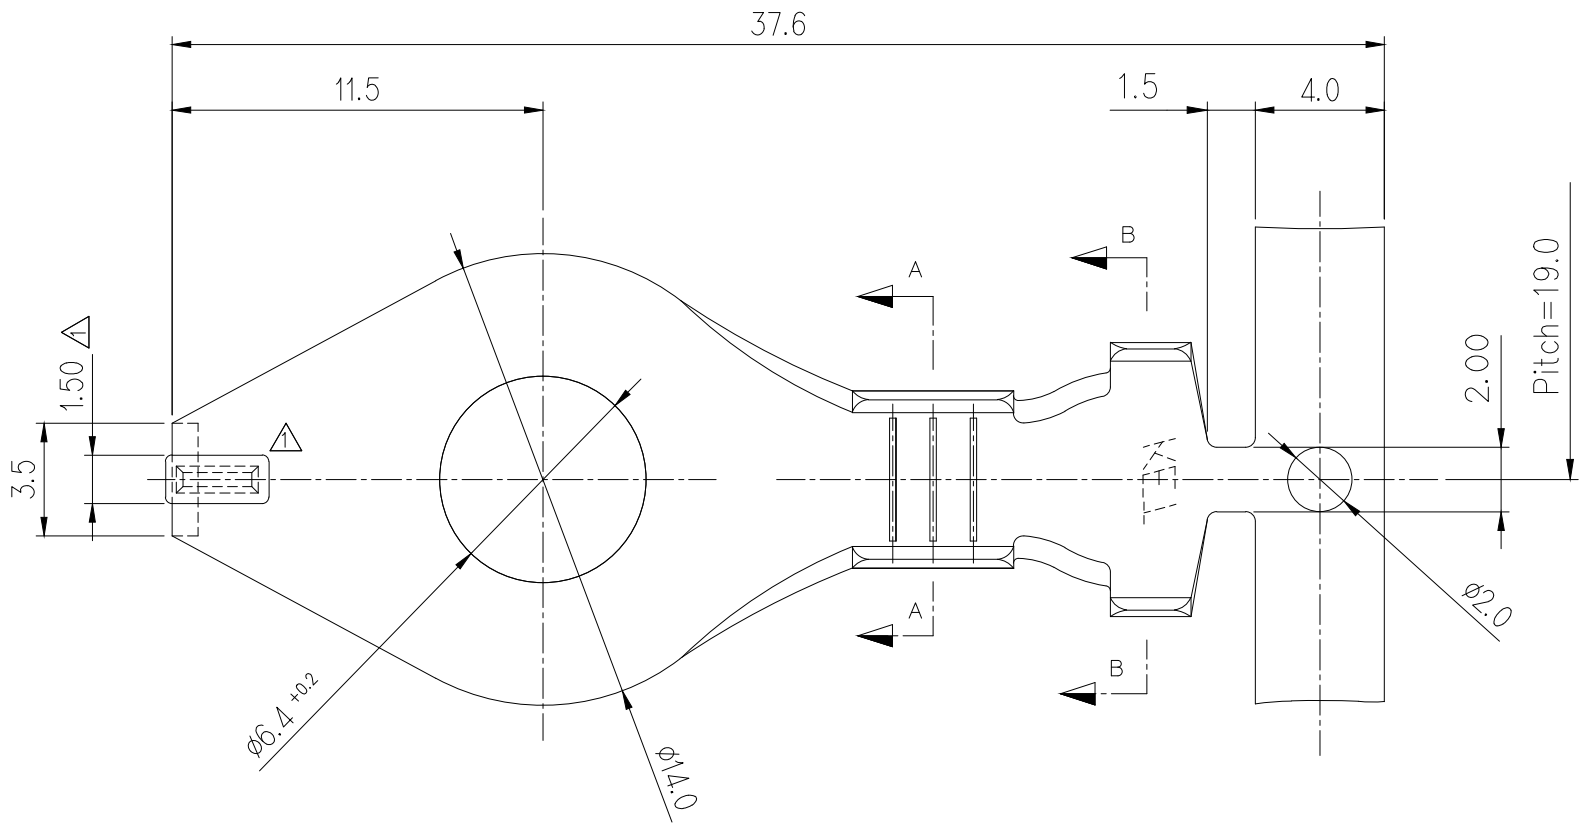

GENERAL TOLERANCE (TERMINAL)						USED ON
10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±0.5	±30'	0.1	

NO	MATERIAL	적용 전선(mm ²)		FINISH
1	BRASS 0.8t	AVS 0.5	AVS 0.5+0.5	UNPLATE
2		AVS 0.85	AVS 1.25	TIN-PLATING
		AVS 0.5+0.85		




SEC. A-A

주 기

- 지시하지 않은 R은 0.5로 할것.
- 기능상 유해한 BURR 및 변형등이 없을 것.

NOTE

- UNLESS OTHERWISE SPECIFIED
ALL RADII TO BE 0.5 RADIUS.
- MUST BE FREE OF FLASH, BURR
AND IMPERFECTION THAT AFFECT FUNCTION.

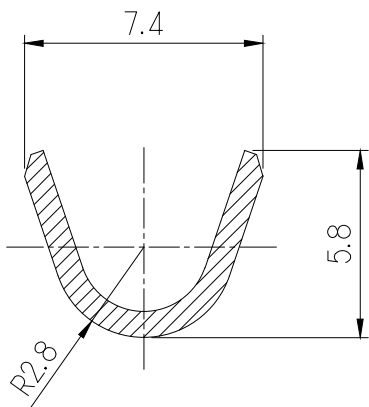

SEC. B-B

APPROVED

2016-03-11

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Develop
ment Team 1

ISSUE MARK

						MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH	SEE TABLE	
						WIRE RANGE	SEE TABLE	
						INSULATION		
	형상 변경(비드 추가-S050049)	MKNO		05. 03. 07		TOLERANCE EXCEPT AS NOTED	SCALE 4/1	PART NO. ST710853
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NAME		
DR. SH HEO 99.12.13		CHK.				Ø 6.4 EARTH RING TERMINAL-STOPPER(S)		
CHK.		APP.						