

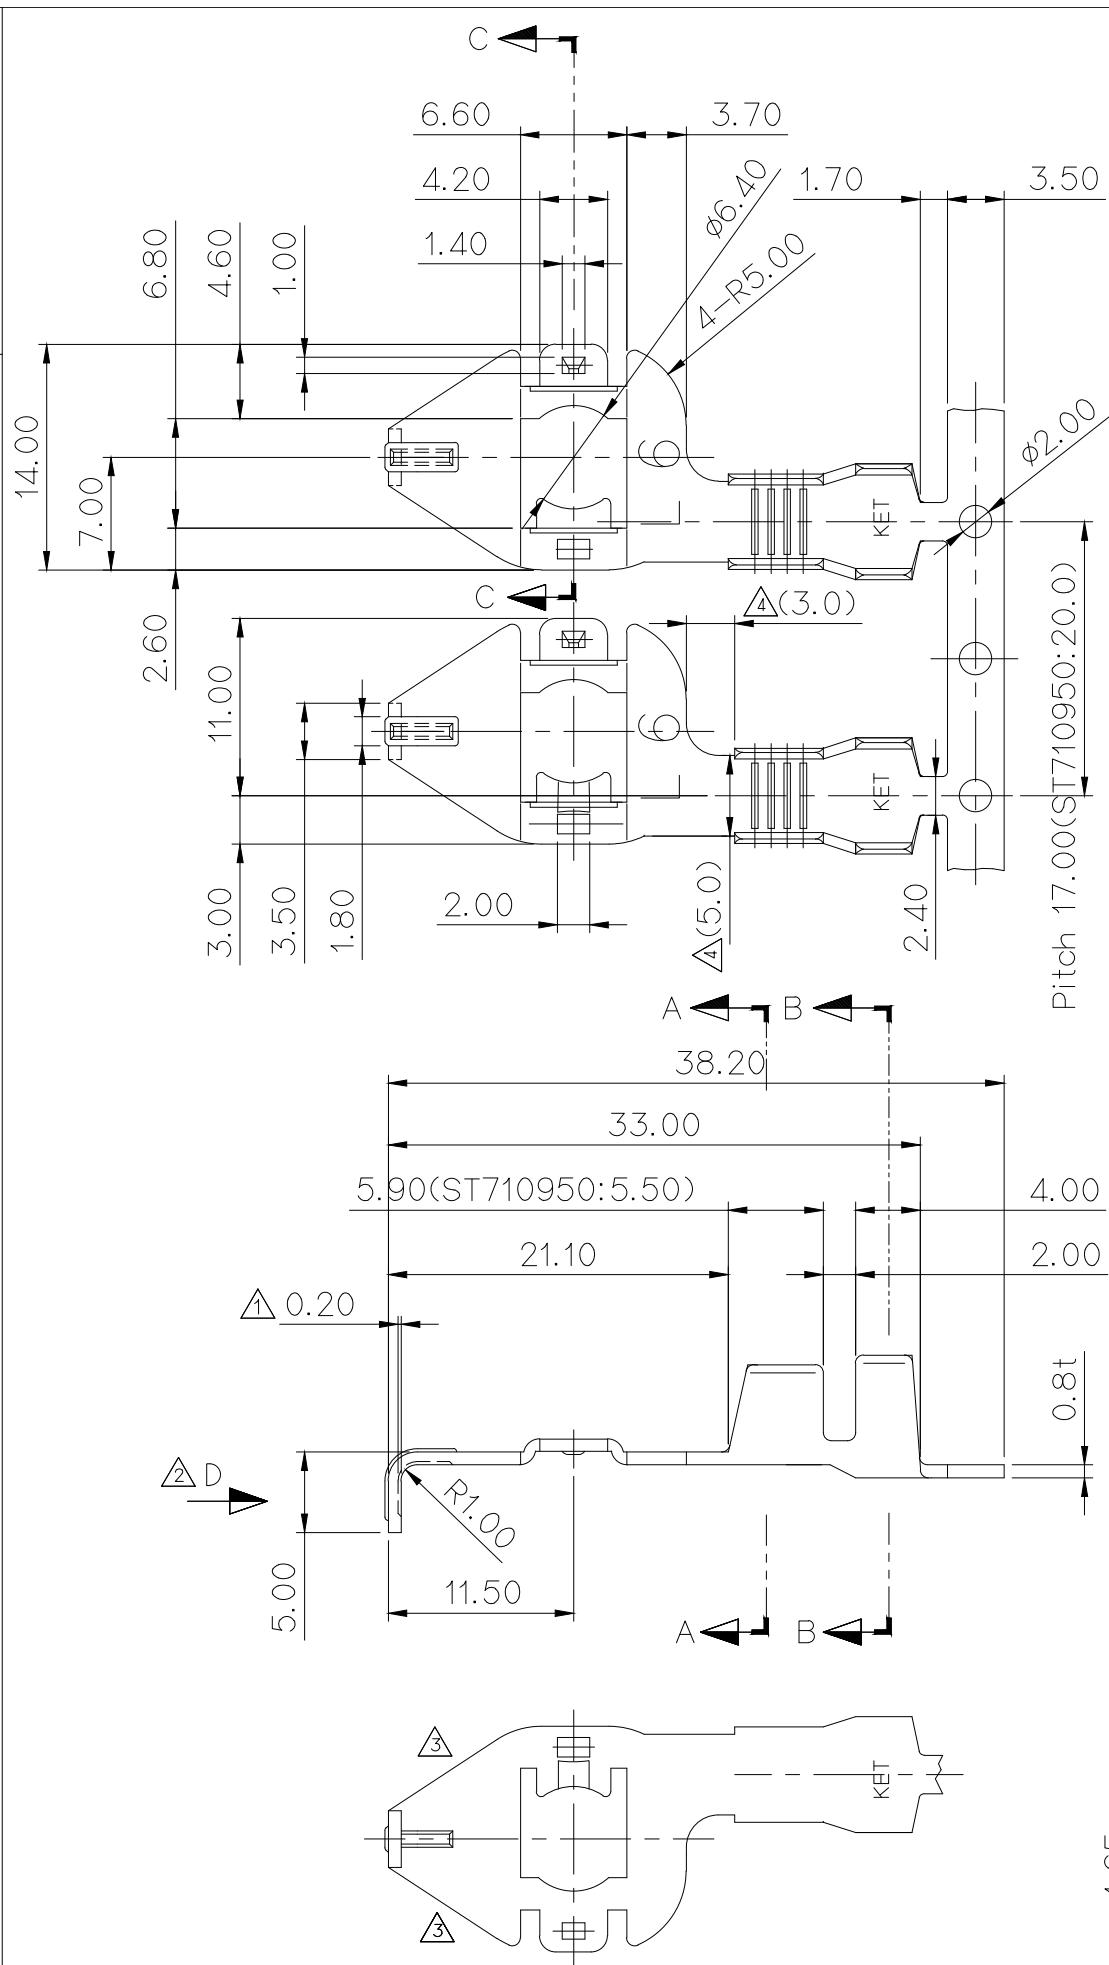



SECTION B-B



SECTION A-A

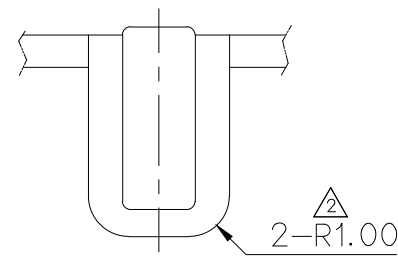

VIEW D
(S=5/1)

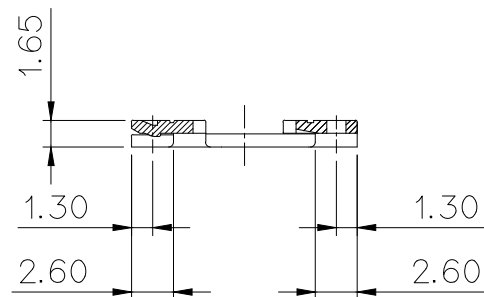

SECTION C-C

GENERAL TOLERANCE (TERMINAL)						USED ON
10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±0.5	±30'	0.1	

NO	PART NO	WIRE			INSULATION			WIRE RANGE (mm ²)	FINISH
		W1	H1	R1	W2	H2	R2		
1	ST710950-1	7.0	6.6	3.0	8.0	7.8	3.5	AEXF(AEX) 5.0~8.0	UNPLATE
	ST710950-3							AVS 5.0~8.0	PRE-TIN

주 기

1. 지시하지 않은 R은 0.5로 할 것.
2. 기능상 유해한 BURR 및 변형등이 없을 것.
3. 적용 RIGHT TM'L NO. : ST710506,507,806
4. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED
ALL RADIUS TO BE 0.5 RADIUS.
2. MUST BE FREE OF FLASH, BURR
AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE RIGHT TM'L NO.: ST710506,507,806
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,
MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs,
PBDEs) SHALL NOT EXCEED THE MAXIMUM
PERMISSIBLE CONCENTRATION PRESCRIBED UNDER
EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2016-03-09

**KOREA ELECTRIC
TERMINAL CO., LTD.
Product Development Team 1**

ISSUE MARK

5	ECO-1206-022 근거 도면변경	HSR		'12.06.08	MATERIAL	BRASS	 KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
4	설계시양변경(S100311)근거 도면 재작성	LHS		'10.12.03	FINISH	SEE TABLE		
3	설계시양변경(S060332)근거 도면재작성 (STOPPER 형상변경)	KBS		'06.12.12	WIRE RANGE	SEE TABLE		CLASS
2	설계시양변경(060297)근거 도면재작성 (STOPPER부 글단 R추가)	YSW		'06.11.13	INSULATION			TYPE
1	시방변경 030103근거 재작성	HSW		'03.05.28	TOLERANCE EXCEPT AS NOTED	SCALE 2/1		PART NO. ST710950
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NAME		
DR.	HEO 99.06.18	CHK.			06/18	ø6.4 EARTH RING TM'L LH-STOPPER(S,M,L)		
CHK.		APP.			06/18			