
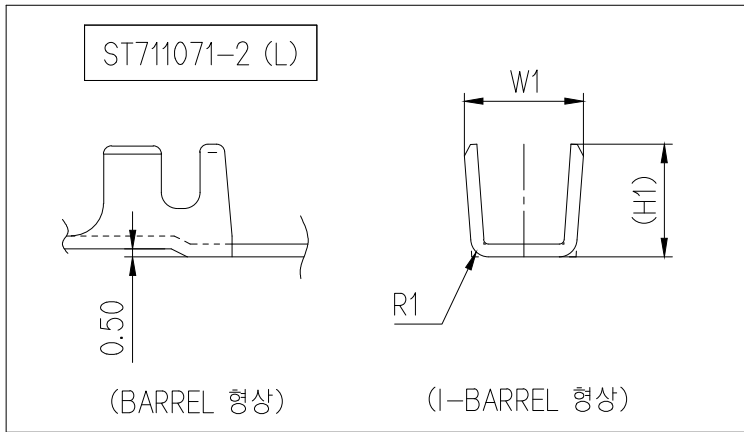
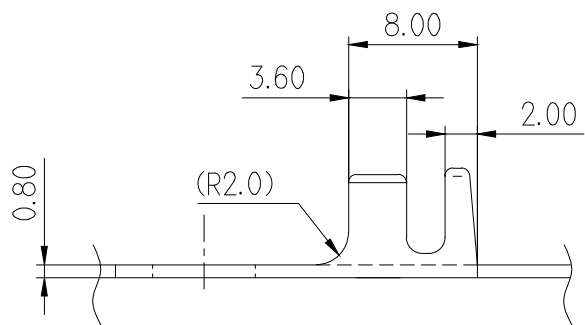



주 기

1. 지시없는 C,R=0.30으로 한다.
2. 적용전선 : SEE TABLE
3. 제품기능상 유해한 BURR, CRACK 등이 없을것.
4. KET MARK는 INSULATION BARREL에 MARKING한다.
5. KET 문자 : ㄴ TYPE, 기울기 15° (문자높이;0.1-0.2, SIZE;1.0)
- 6.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,
PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다.

1. UNLESS OTHERWISE SPECIFIED ALL CHAMFER, RADII TO BE 0.3
2. APPLICABLE WIRES : SEE TABLE
3. MUST BE FREE OF BURR, CRACK
AND IMPERFECTION THAT AFFECT FUNCTION.
4. KET SHALL BE MARK ON INSULATION BARREL.
5. KET MARK : TYPE, TAPER 15° (H; 0.1–0.2, SIZE; 1.0)
6. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

Technical drawing of a mechanical part (Fig. 1) showing a side view with dimensions. The part has a central body with a hexagonal hole and a nut area. Dimensions include: total length 23.00, distance from center to nut area 2.00, distance from center to hexagonal hole 6.33, hole diameter 11.0, and nut area diameter 14.0. A note (P)25.0 is also present.



					MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH SEE TABLE		
					WIRE RANGE SEE TABLE		
					INSULATION		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE SCALE 2/1 PART NO. ST711071-3 (L) ST711072-3 (M), ST711073-3 (S)
DR.	KMH	'08.07.03					PART NAME 팔각 EARTH RING TERMINAL (23mm)
CHK.	HSH	'08.07.03	APP. KKJ			'08.07.03	