
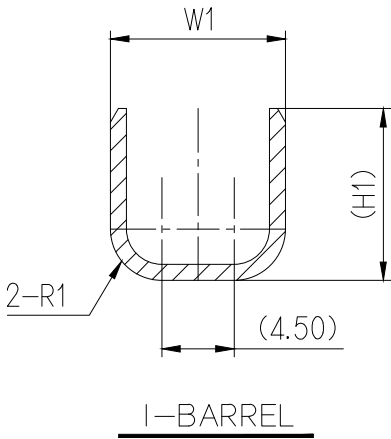

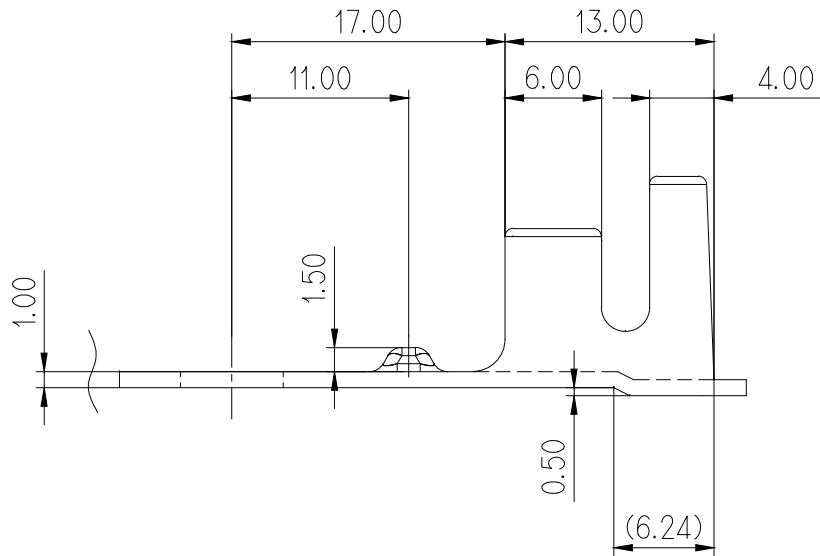


NO	PART NO	BARREL SIZE	WIRE BARREL SIZE			INSUL. BARREL SIZE			WIRE RANGE (mm ²)	FINISH	MATERIAL
			R	H	W	R1	H1	W1			
1	ST711077-3	XL	4.00	(8.50)	9.50	3.20	(10.70)	11.20	FLY 10 FLY 4 + 6 (2WIRE)	PRE-TIN	BRASS 1.00 t

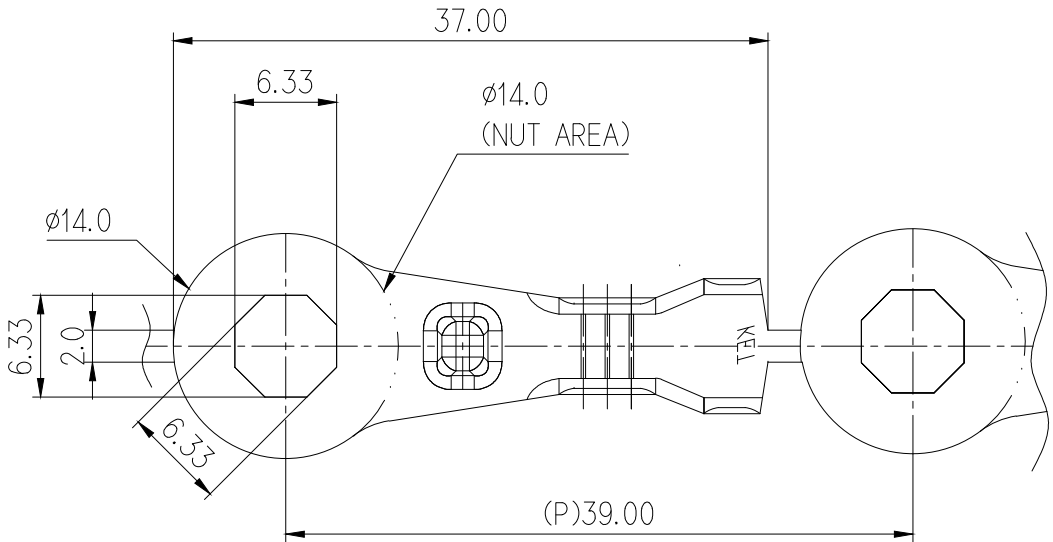

GENERAL TOLERANCE (TERMINAL)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

주 기

1. 지시없는 C,R=0.30으로 한다.
2. 적용전선 : SEE TABLE
3. 제품기능상 유해한 BURR, CRACK 등이 없을것.
4. KET MARK는 INSULATION BARREL에 MARKING한다.
5. KET 문자 : ㄴ TYPE, 기울기 15° (문자높이;0.1-0.2, SIZE;1.0)
- 6.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL CHAMFER, RADII TO BE 0.3
2. APPLICABLE WIRES : SEE TABLE
3. MUST BE FREE OF BURR, CRACK AND IMPERFECTION THAT AFFECT FUNCTION.
4. KET SHALL BE MARK ON INSULATION BARREL.
5. KET MARK : ㄴ TYPE, TAPER 15° (H; 0.1-0.2, SIZE; 1.0)
6. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

					MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH		SEE TABLE		
					WIRE RANGE		SEE TABLE		
					INSULATION				
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
	DR.	KMH '08. 07.03	CHK.				SEE TABLE	2/1	ST711077-3
CHK.	HSH '08.07.03	APP. KKJ '08.07.03			팔각 EARTH RING TERMINAL (37mm)				

APPROVED

2016-03-09

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Development Team 1

ISSUE MARK