



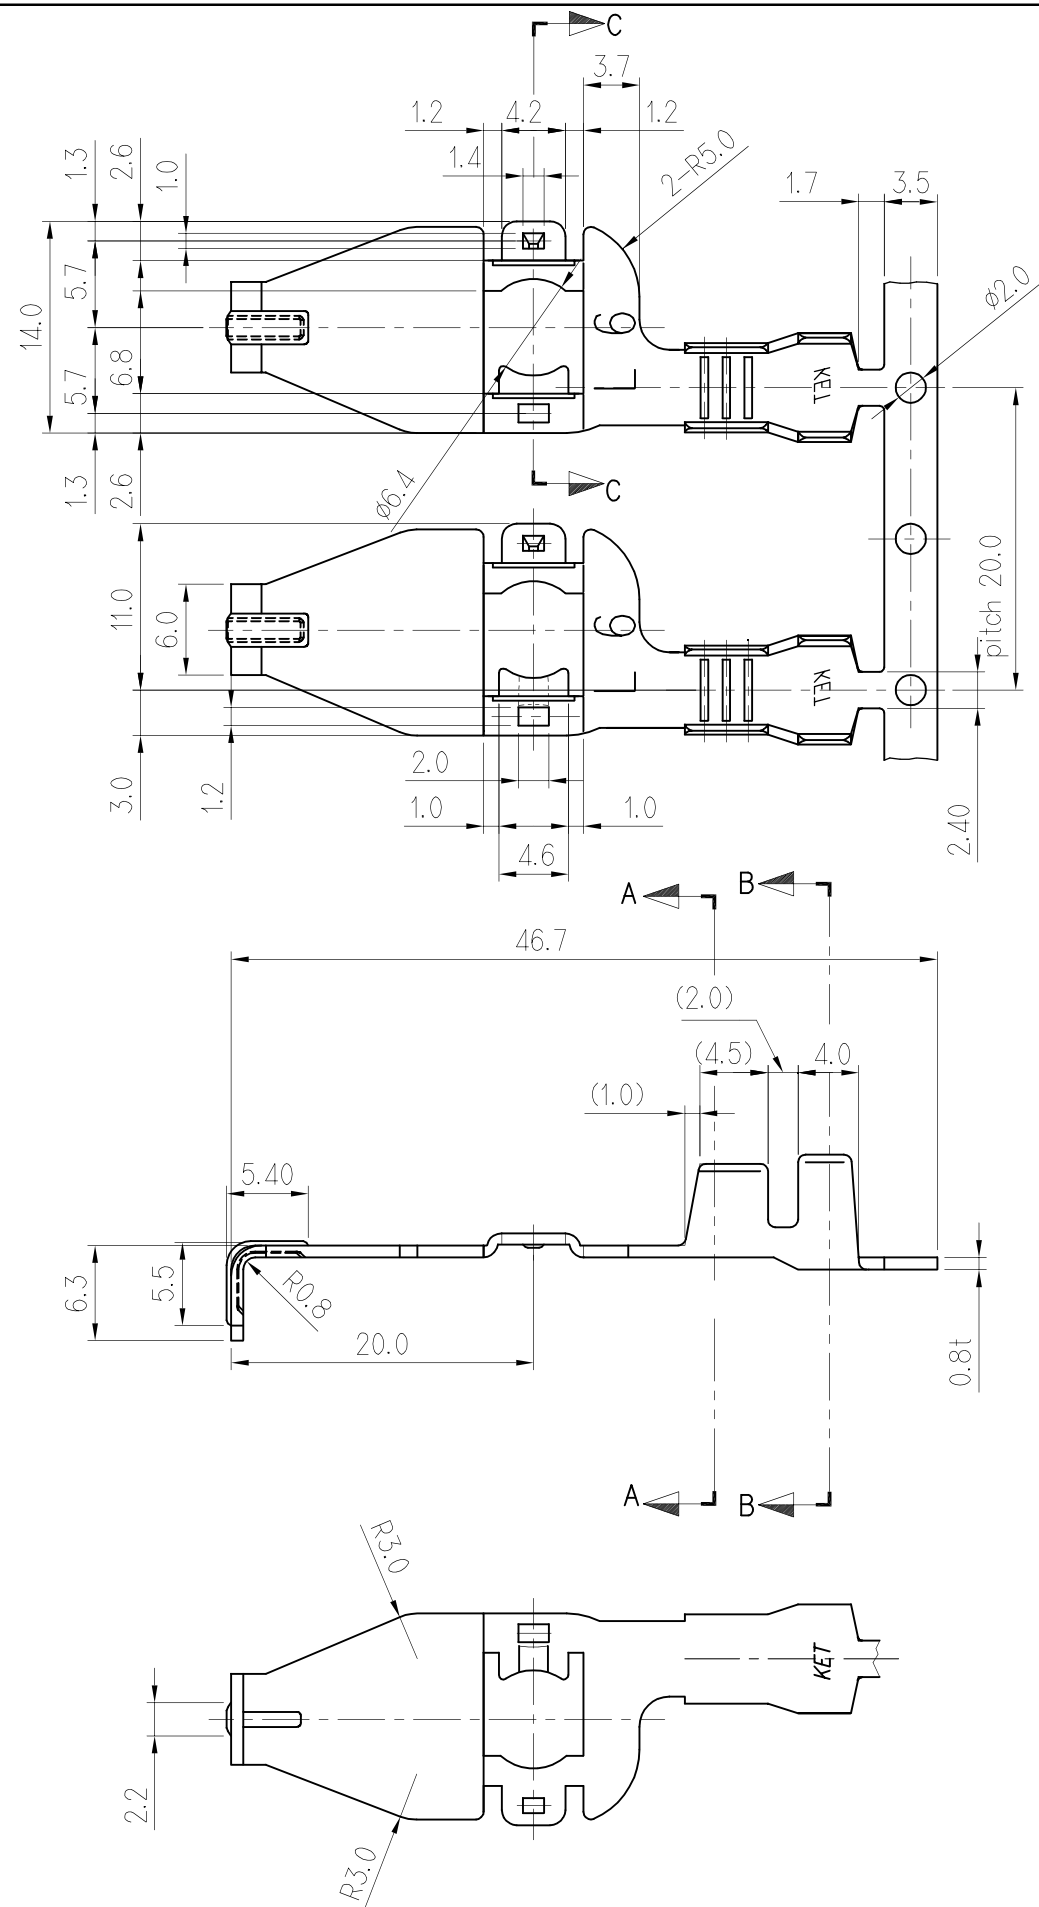


GENERAL TOLERANCE (TERMINAL)						USED ON
10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±0.5	±30'	0.1	


NO	PART NO	WIRE			INSULATION			WIRE RANGE (mm ²)	FINISH	MATERIAL
		W1	H1	R1	W2	H2	R2			
1	ST711198-1	5.0	(4.0)	2.0	7.4	(5.5)	2.8	AVS 0. 5,0.5X2, 0.85	UNPLATE	BRASS
	AVS 1.25, 0.5+0.85							PRE-TIN		
2	ST711199-1	6.0	(5.0)	2.3	8.2	(6.8)	3.0	AVS 1.25*2, 0.5+1.25	UNPLATE	BRASS
	AVS 0.5+2.0, 0.85+2.0 AVSS 2.0							PRE-TIN		
3	ST711200-1	7.0	(6.6)	3.0	8.0	(7.8)	3.5	AEXF(AEX) 5.0, 8.0 AVS 5.0, 8.0	UNPLATE	BRASS
	FLRY-B 4.0, 6.0							PRE-TIN		



SECTION A-A



SECTION B-B

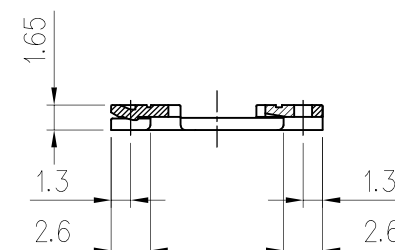

SECTION C-C

주 기

1. 지시하지 않은 R은 0.5로 할것.
2. 기능상 유해한 BURR 및 변형등이 없을 것.
3. 적용 RIGHT TM'L NO. : ST710506,507,806

NOTE

- | |
|--|
| 1. UNLESS OTHERWISE SPECIFIED |
| ALL RADII TO BE 0.5 RADIUS. |
| 2. MUST BE FREE OF FLASH, BURR |
| AND IMPERFECTION THAT AFFECT FUNCTION. |
| 3. APPLICABLE RIGHT TM'L NO.: ST710506,507,806 |



					MATERIAL	SEE TABLE		KOREA ELECTRIC
					FINISH	SEE TABLE		TERMINAL CO., LTD.
					WIRE RANGE	SEE TABLE	CLASS	
					INSULATION		TYPE	
LTR	REVISION RECORD	DR. CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.	
DR.	YJH 09.04.02	CHK. 		09.04.02	SEE TABLE	2/1		ST711198,199,200
CHK.		APP. 		09.04.02	PART NAME			
					ø 6.4 EARTH RING TM'L —STOPPER(L) S,M,L			