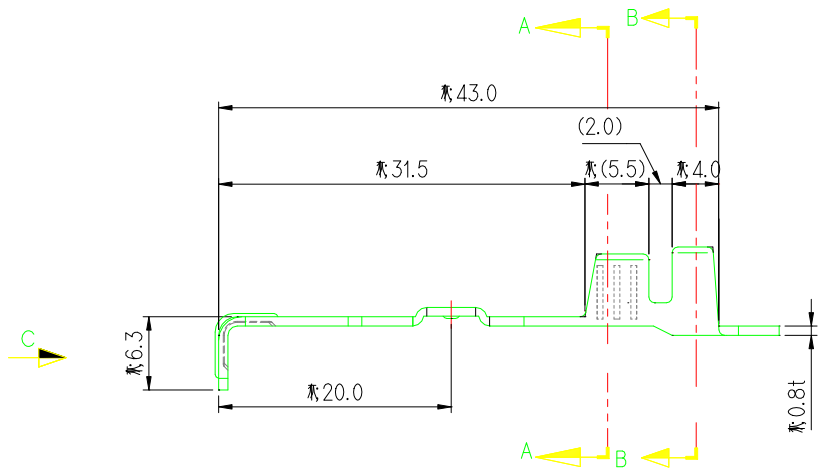
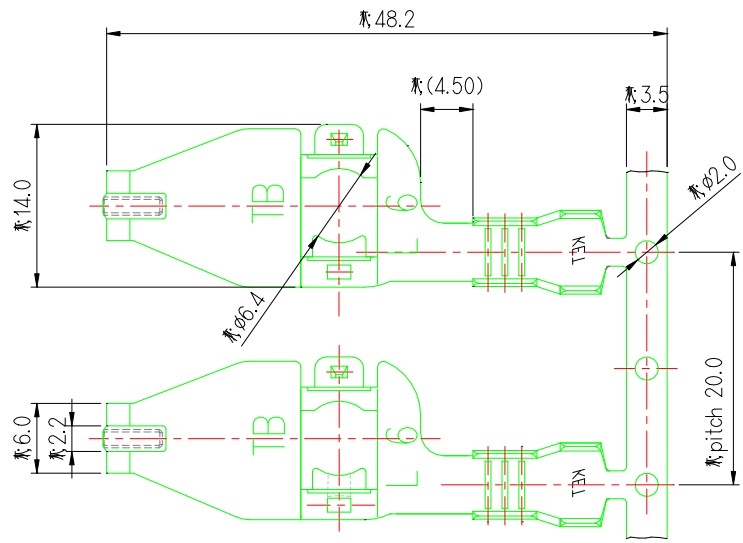


GENERAL TOLERANCE (TERMINAL)						USED ON
10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±0.5	±30'	0.1	

NO	PART NO	WIRE			INSULATION			WIRE RANGE (mm ²)	FINISH	MATERIAL
		W1	H1	R1	W2	H2	R2			
1	ST711308-3	5.0	(4.0)	2.0	7.4	(5.5)	2.8	AVS 0.5, 0.5X2, 0.85, AVSSXF 1.25 AVS 1.25, 0.5+0.85	PRE-TIN	BRASS
2	ST711309-3	6.0	(5.0)	2.3	8.2	(6.8)	3.0	AVS 1.25*2, 0.5+1.25, AEXF(AEX) 3.0 AVS 0.5+2.0, 0.85+2.0, AVSS 2.0	PRE-TIN	BRASS
3	ST711310-3	7.0	(6.6)	3.0	8.0	(7.8)	3.5	AEXF(AEX) 5.0, 8.0, AVS 5.0, 8.0 FLRY-B 4.0, 6.0	PRE-TIN	BRASS

- 주 기
- 지시하지 않은 R은 0.5로 할 것.
 - 기능상 유해한 BURR 및 변형등이 없을 것.
 - 적용 RIGHT TM'L : ST710953,964,965
 - 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

- NOTE
- UNLESS OTHERWISE SPECIFIED
ALL RADIUS TO BE 0.5 RADIUS.
 - MUST BE FREE OF FLASH, BURR
AND IMPERFECTION THAT AFFECT FUNCTION.
 - APPLICABLE RIGHT TM'L : ST710953,964,965
 - 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED
2015-06-25
KOREA ELECTRIC
TERMINAL CO., LTD.
Product Development
nt Team 1

ISSUE MARK

						MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.		
						FINISH	SEE TABLE			
						WIRE RANGE	SEE TABLE		CLASS	
						INSULATION			TYPE	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO.	SEE TABLE
DR.		HSR 13.02.21		CHK.		PART NAME				
CHK.				APP.		ø 6.4 EARTH RING TM'L(LH-TB)-STOPPER(S,M,L)				

CUSTOMER DRAWING

