
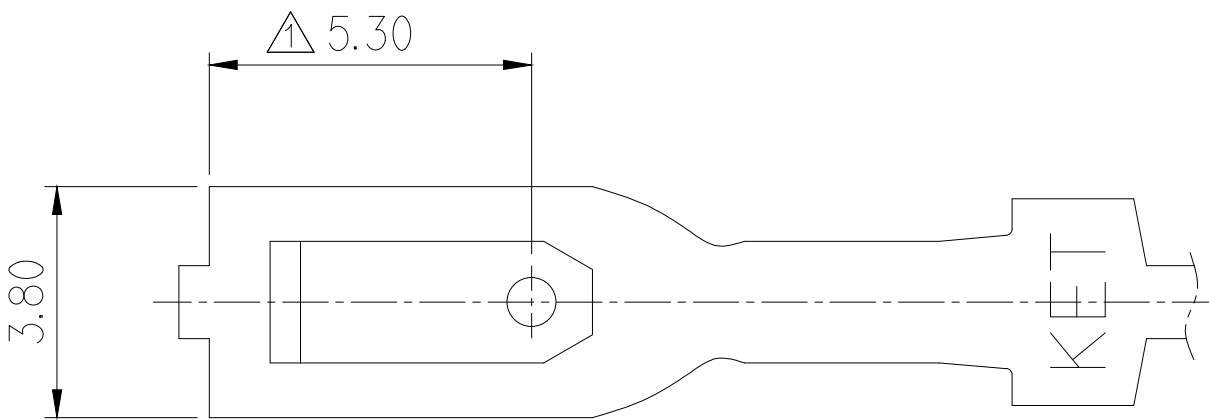
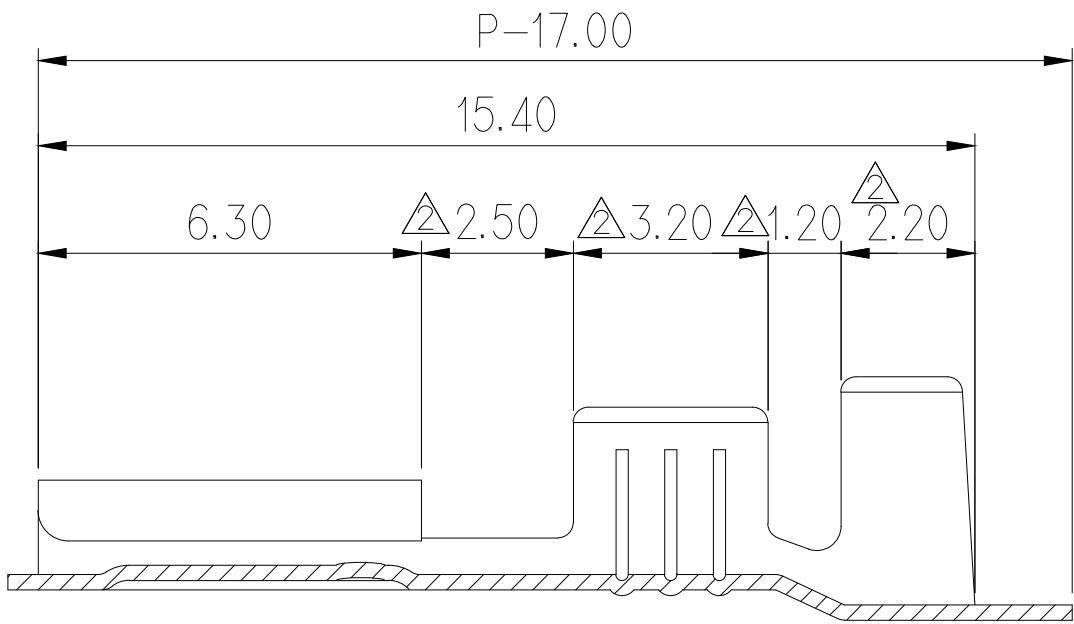


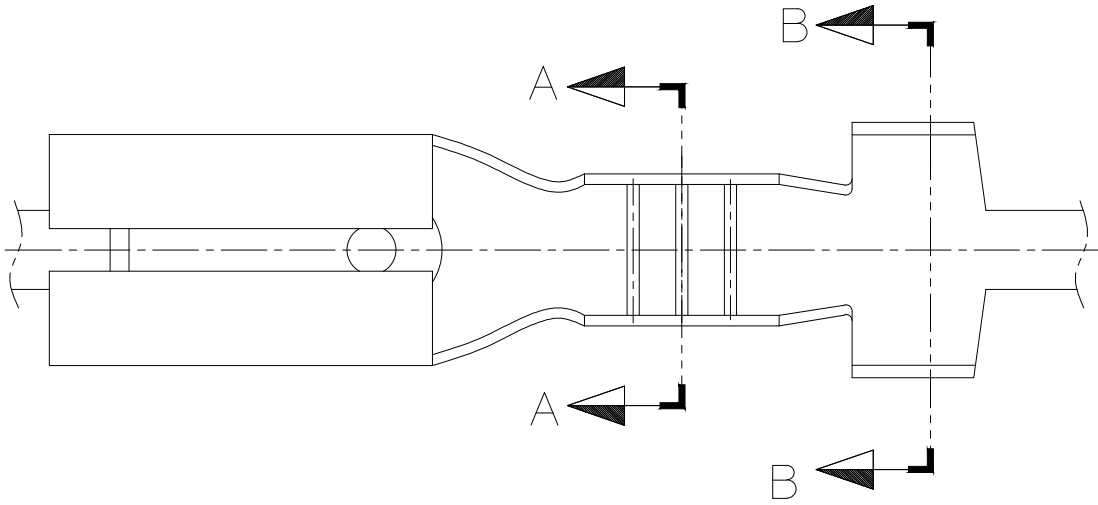


△ 주 기

- 기능상 유해한 흠, 변형 및 BURR 등이 없을 것
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.
- ST731019는 LOW TENSION TYPE임.


△ NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION
- ST731019 IS LOW TENSION TYPE.

USED ON

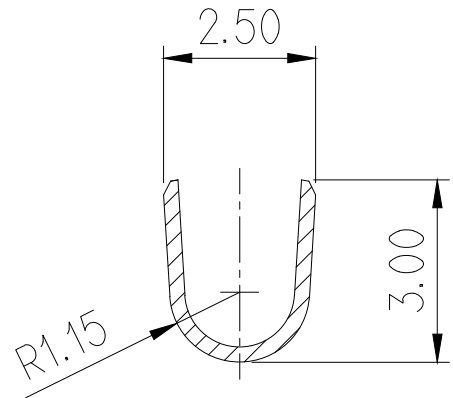

△ SECTION A-A

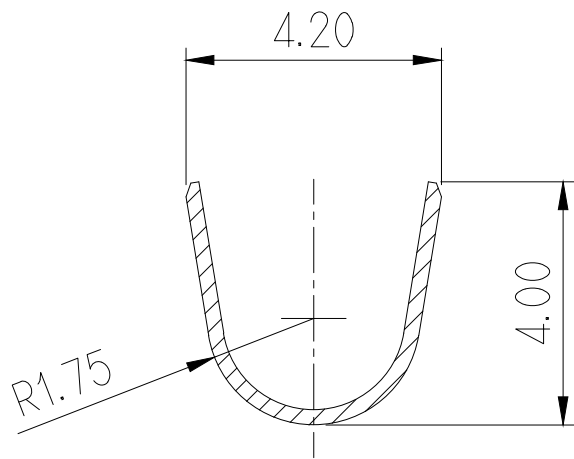

△ SECTION B-B


NO.	MATERIAL	FINISH
1	BRASS (Fit 0.5t TAB)	UNPLATE
2		TIN
3		Ni
4	BRASS (Fit 0.8t TAB)	UNPLATE
5		TIN
6		Ni

APPROVED

2016-03-11

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

					MATERIAL	0.25t	 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH	SEE TABLE	
					WIRE RANGE	0.51-1.42 mm ²	CLASS
△	ECO-1209-083근거 도면 수정	KSJ	79.06.12	'12.09.13	INSULATION	2.03-3.05mm	TYPE
△	EMBOSSING 위치 변경	KO	79.06.12	'01.03.30			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE
						±0.2	5/1
DR.	속 79.06.12	CHK.				PART NAME	PART NO.
						110 SLIP-ON (L)	△ST730052, 1019