


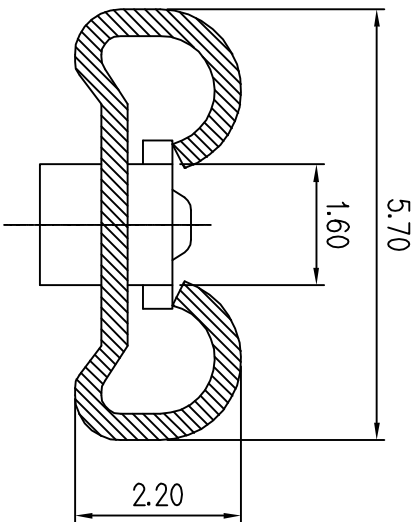

Side view cross-section of a multi-layered assembly. The total height is 18.40. The assembly consists of several layers and features with the following dimensions (from top to bottom):

- Top layer: 0.40
- Layer below top: 6.00
- Layer below that: 5.80
- Layer below that: 3.20
- Layer below that: 1.40
- Bottom layer: 1.60

Additional dimensions and features:

- Horizontal dimension at the top: $t0.5$ TAB INSERT
- Horizontal dimension on the left side: 0.90
- Horizontal dimension on the left side: 3.20
- Horizontal dimension on the right side: 1.40

Technical drawing of a U-shaped profile. The profile is symmetrical about a vertical centerline. The width of the base is dimensioned as 2.80. The height of the vertical side walls is dimensioned as 2.80. The top of the profile is rounded. The interior of the U-shape is filled with diagonal hatching lines.

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.

2. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

1. 기능상 유해한 점, 변형 및 BUR 등이 없을 것
2. 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

ISSUE MARK	
------------	--