


GENERAL TOLERANCE (TERMINAL)				USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT
±0.2	±0.25	±0.3	±30'	0.1

PART NO.
ST730694-3 / 695-3

CUSTOMER DRAWING

(DIMENSIONS IN MM)

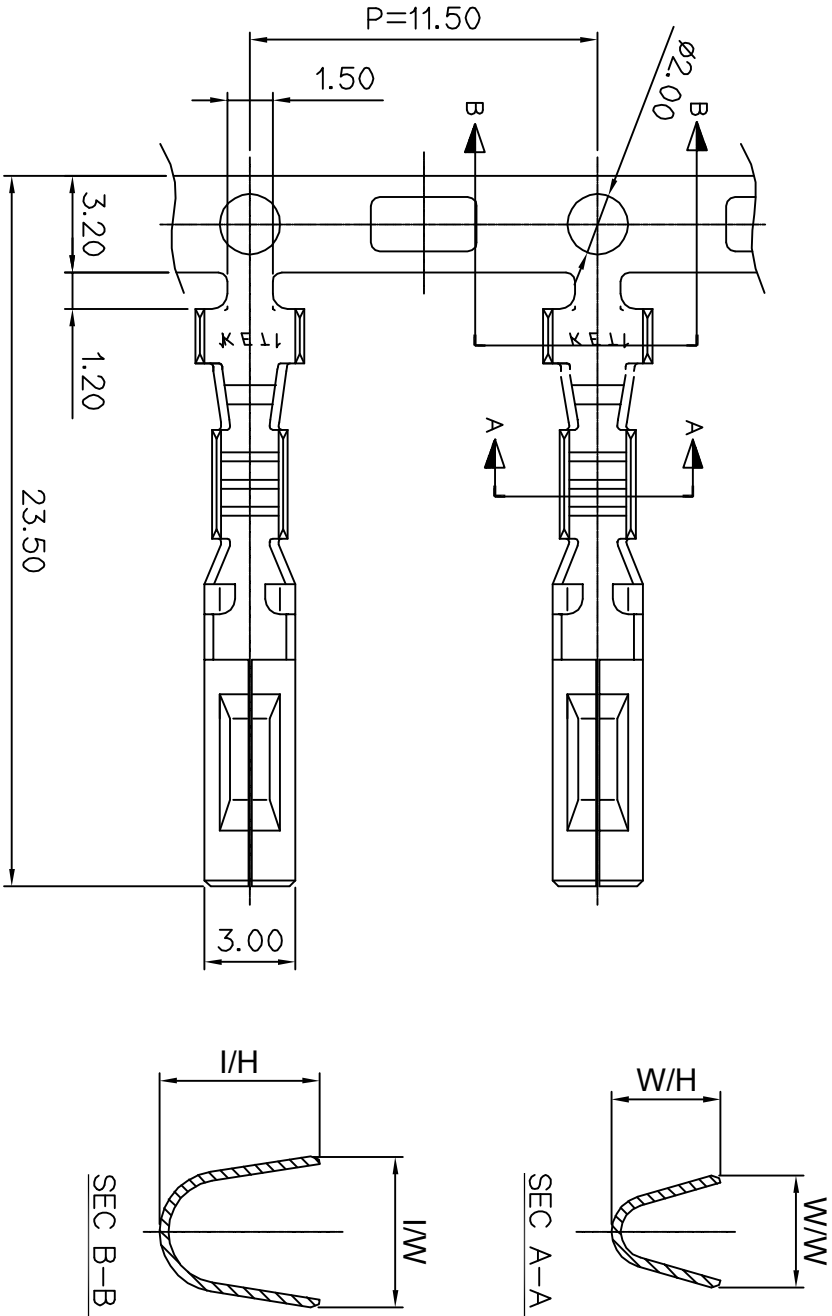


BARREL PART NO.	WIRE RANGE		WIRE BARREL		INSULATION BARREL		INSULATION O.D
	AWG #	(mm ²)	W/W	W/H	I/W	I/H	VSF WIRE(mm)
ST730694-3	22-20	0.3-0.5	2.5	2.4	4.0	4.0	1.8-2.5
ST730695-3	20-18	0.5-0.75	2.8	2.8	4.2	4.2	2.5-2.7

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

주 기

- 기능상 유해한 흠, 변형 및 BURR 등이 없을 것
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

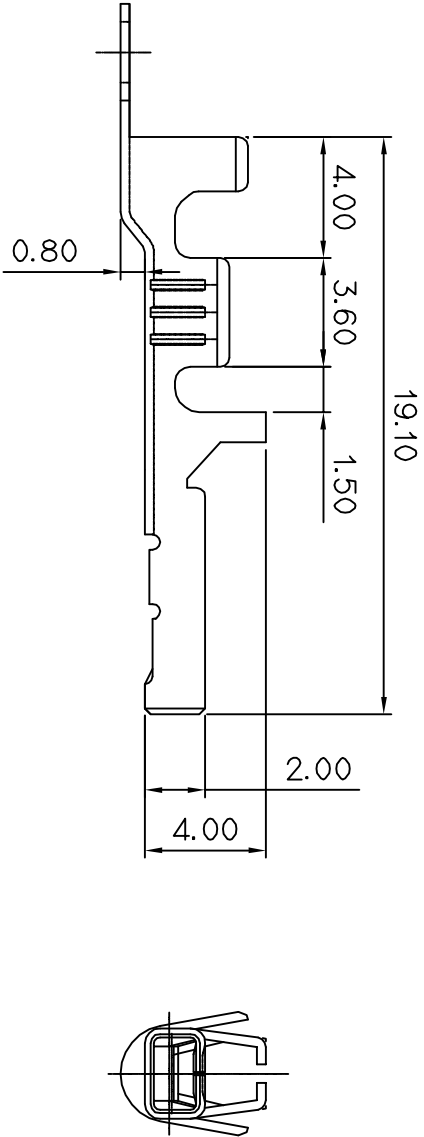

					ISSUE MARK	
					KIEIT KOREA ELECTRIC [ENGINEERED] TERMINAL CO., LTD.	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	
DR.	PJM '12.07.03	CHK.				
CHK.		APP.				
						ENGINEERED
MATERIAL COPPER ALLOY						
FINISH PRE-TIN						
WIRE RANGE SEE TABLE						
INSULATION SEE TABLE					CLASS	PART NO. ST730694-3 / 695-3
					TYPE	
TOLERANCE EXCEPT AS NOTED					SCALE 4/1	
PART NAME					1806 D/L REC TM'L (S)/(M)	