

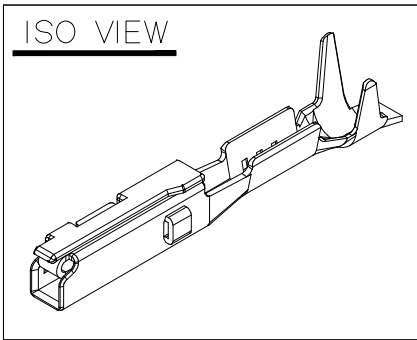
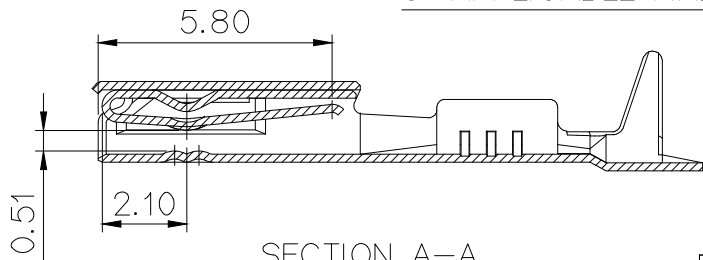
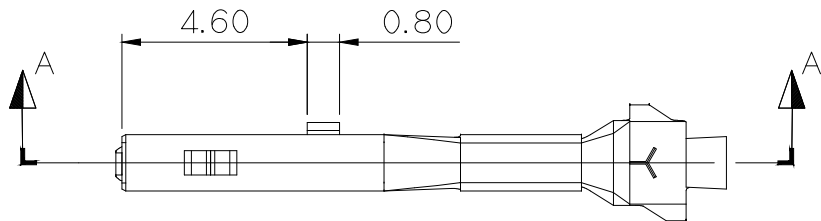
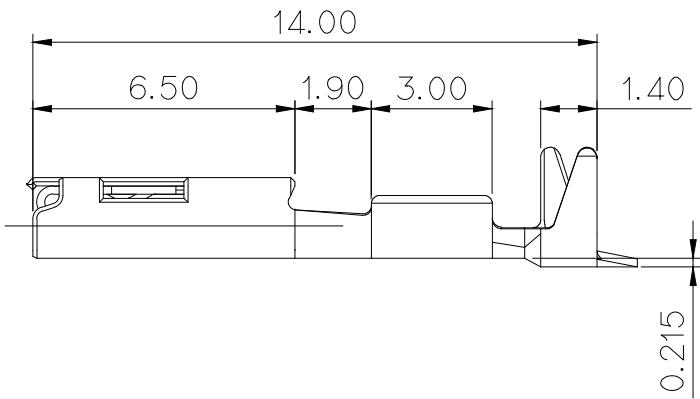
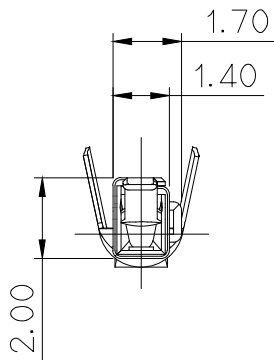


	PART No.	PLATING	W1	W2	H1	H2	적용 W/SEAL	적용 WIRE SIZE	
S	ST730963-3	Sn	1.49	2.82	1.82	2.84	MG683293	ISO (ø1.25-ø1.40)	CAVS 0.3, CAVUS 0.5 AESSX 0.3f
	ST730963-G	Au							
M	ST730962-3	Sn	1.82	2.94	2.20	3.13	MG683292	ISO (ø1.40-ø1.60)	CAVS 0.5, AVSSX 0.5f CAVUS 0.85
	ST730962-G	Au							

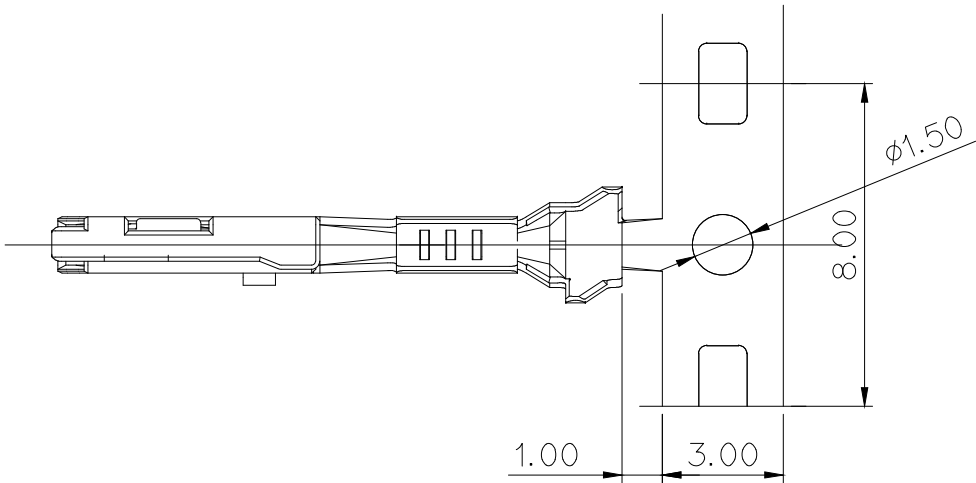

GENERAL TOLERANCE (TERMINAL)						USED ON
10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±0.5	±30'	0.1	

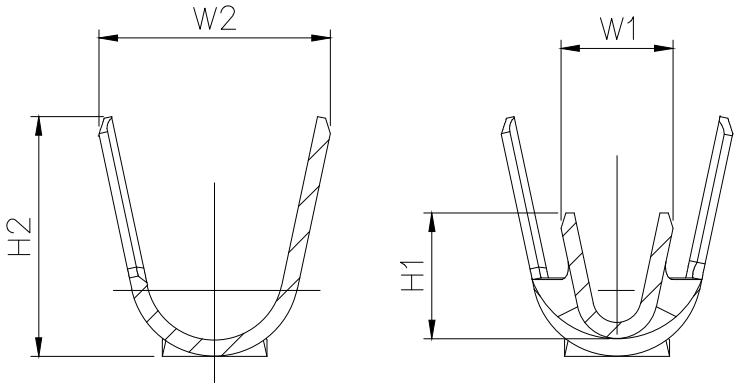

주 기

- 지시없는 C,R=0.30으로 한다.
- 기능상 유해한 흠,변형 및 BURR가 없을것.
- 적용 상대 MALE TERMINAL : 7114-4415/4416

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE MALE TERMINAL : 7114-4415/4416

APPROVED

2016-02-16

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Develop
ment Team 1

ISSUE MARK

					MATERIAL Copper Alloy 0.2t		 KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH PRE-TIN/ Au				
					WIRE RANGE				
					INSULATION				
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 5/1	PART NO. ST730962/963
DR.	KYM '04.08.23		CHK.			PART NAME			
CHK.	— 8/23		APP.			— 8/23 RH(O25WP) FEMALE TERMINAL			