
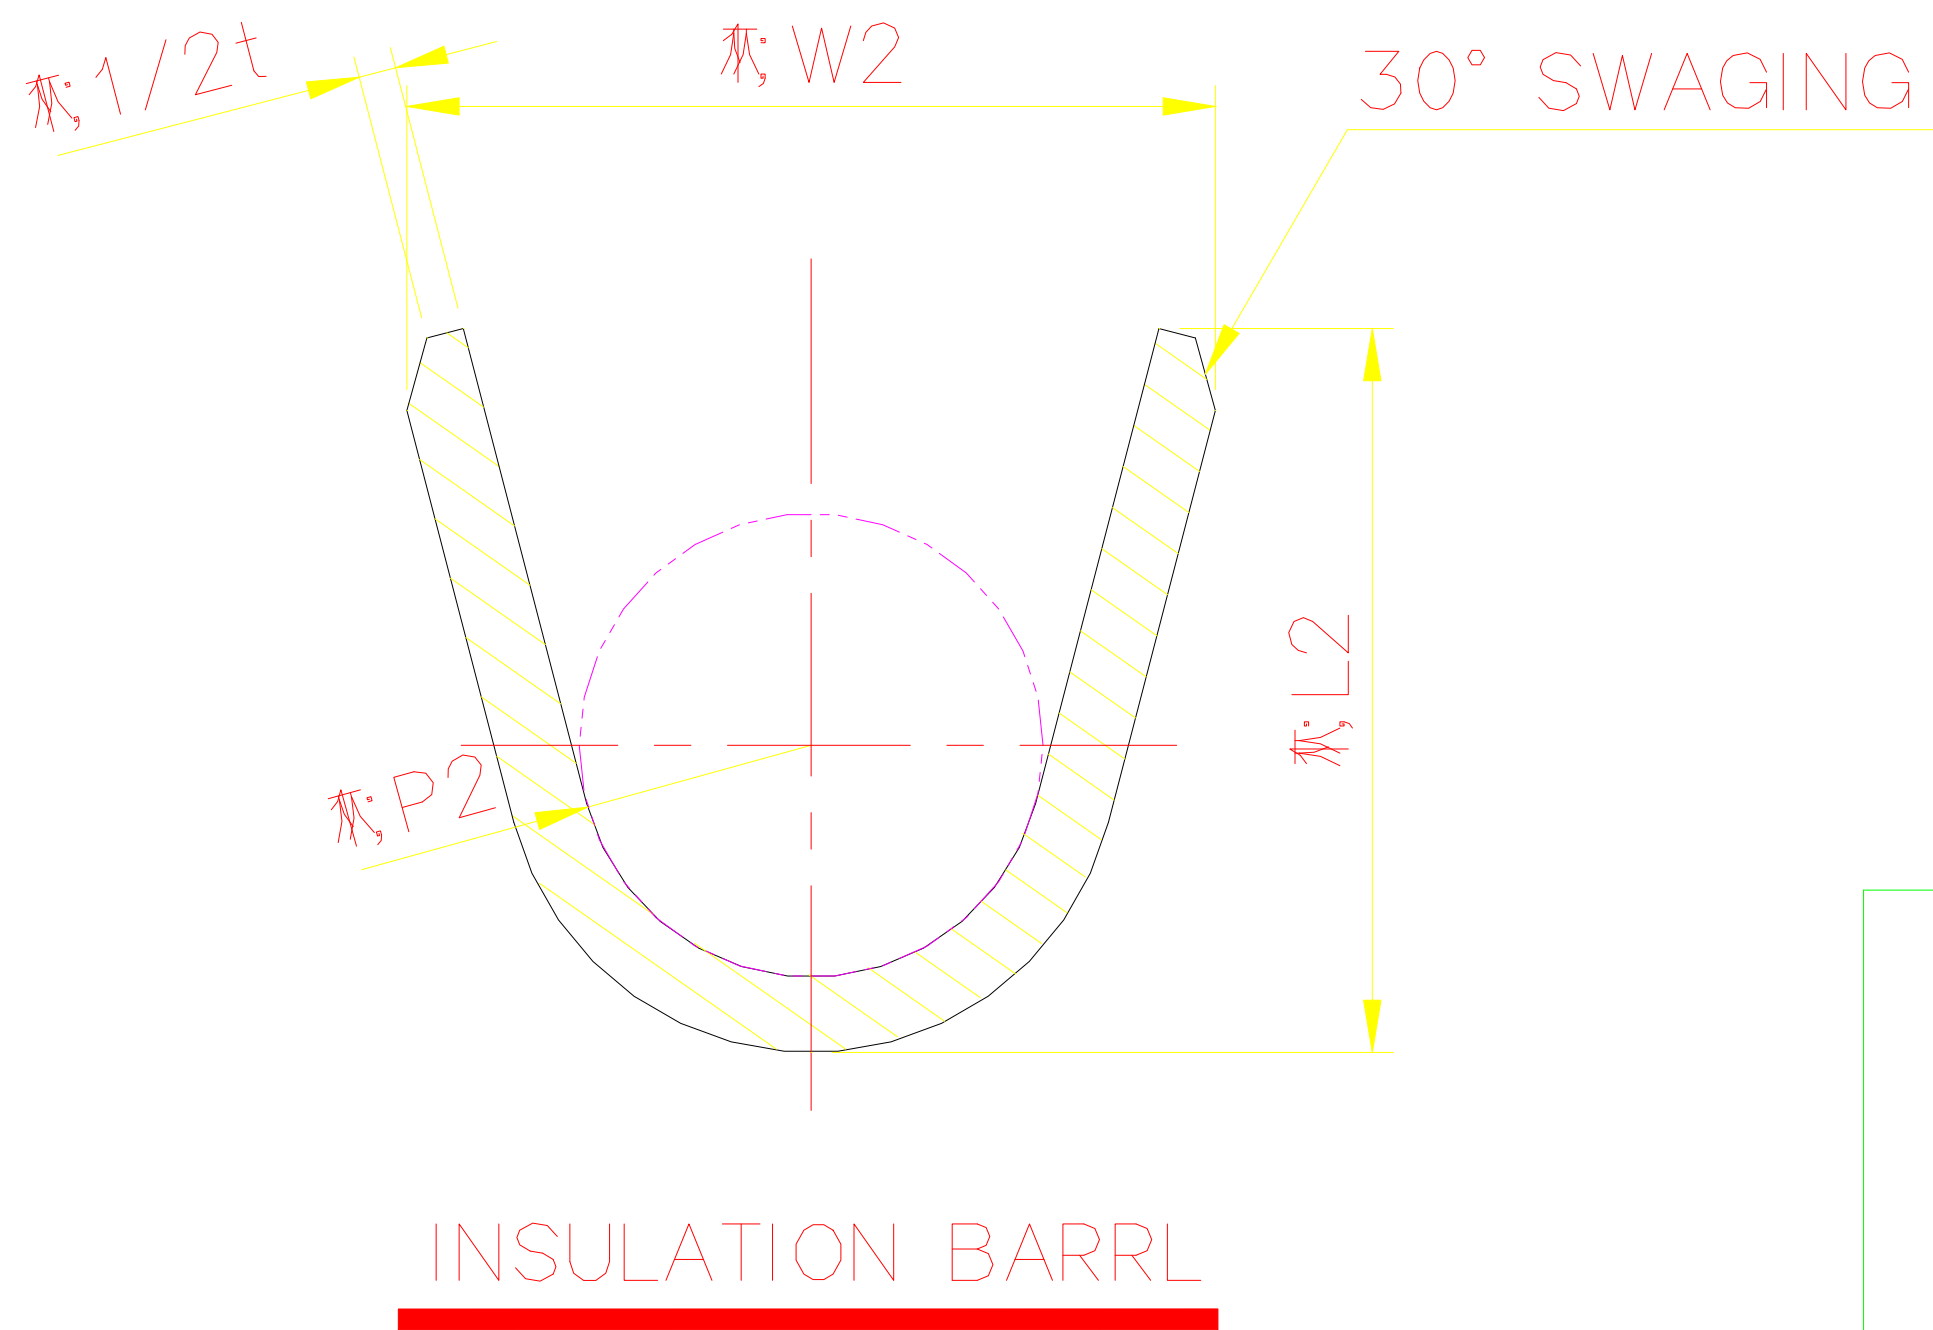
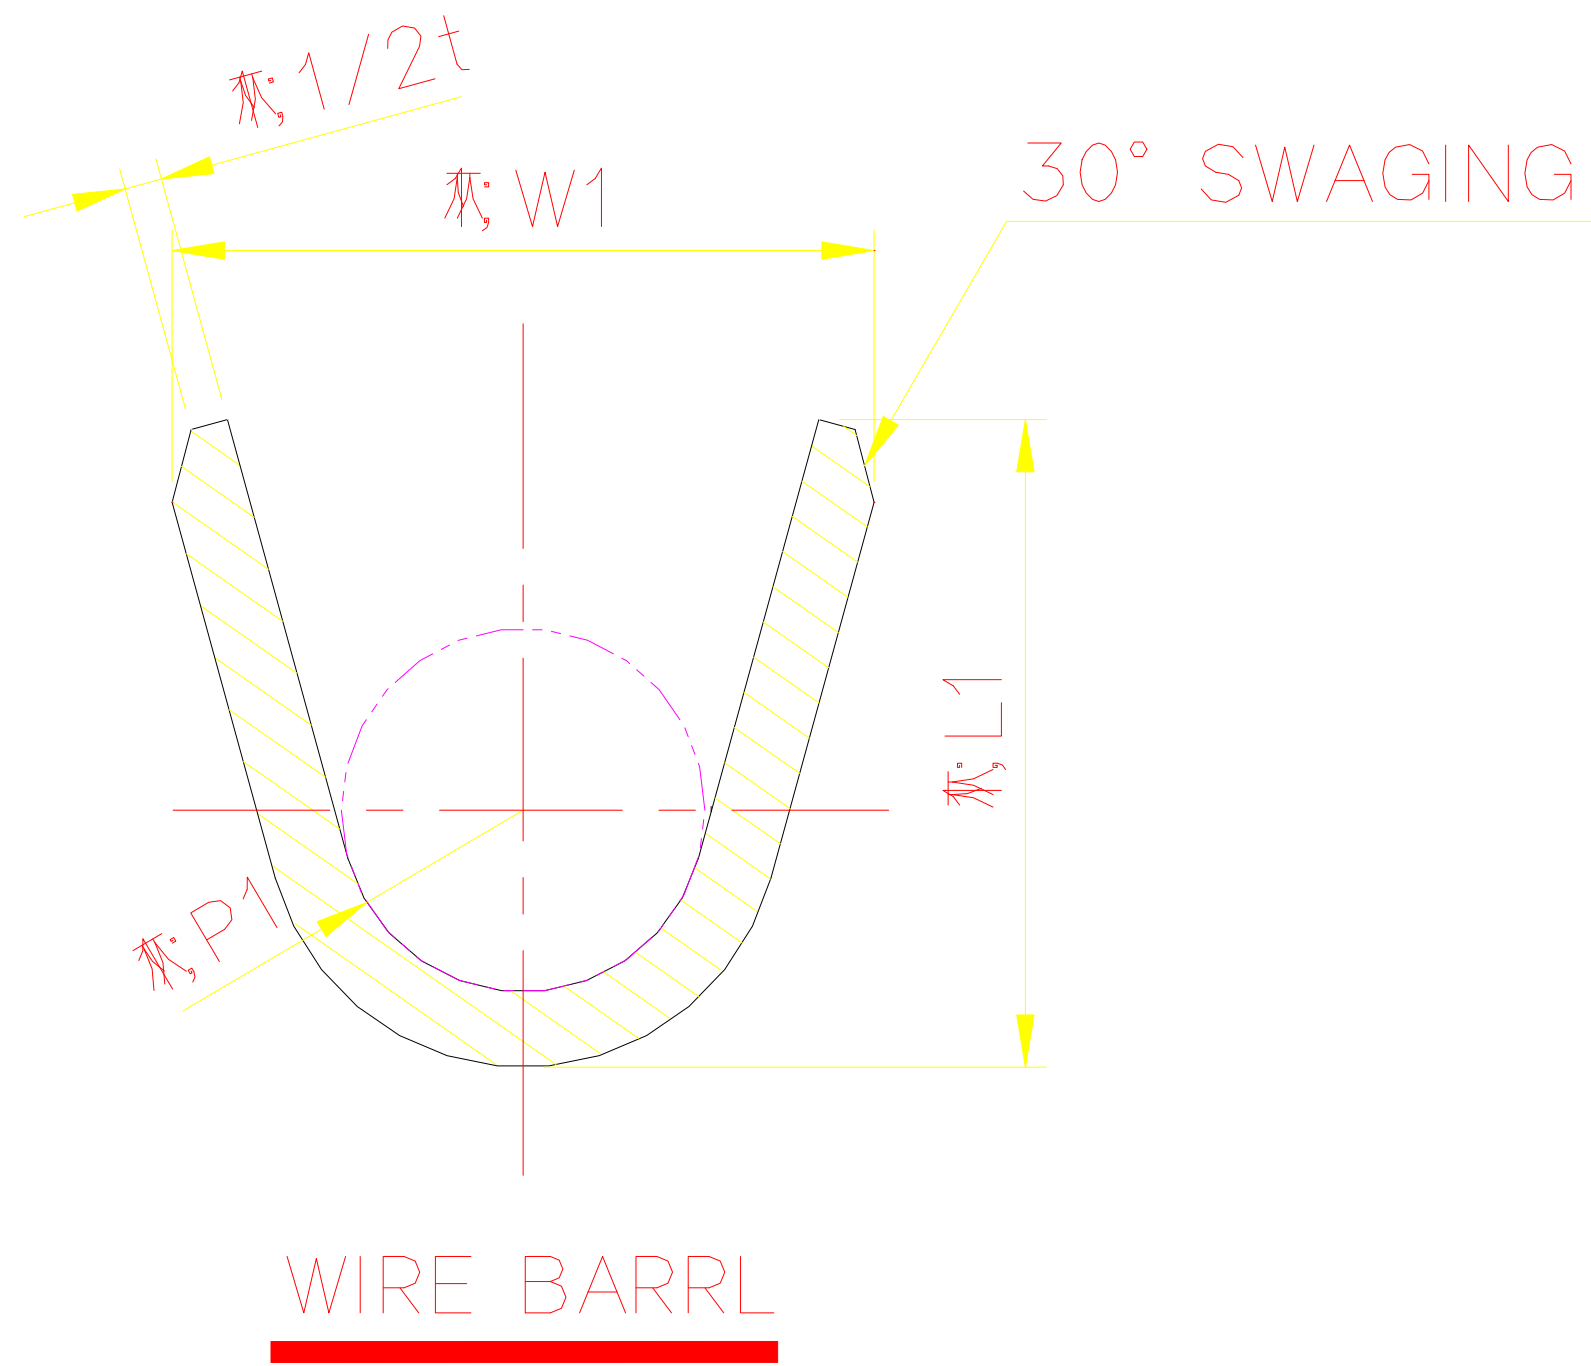
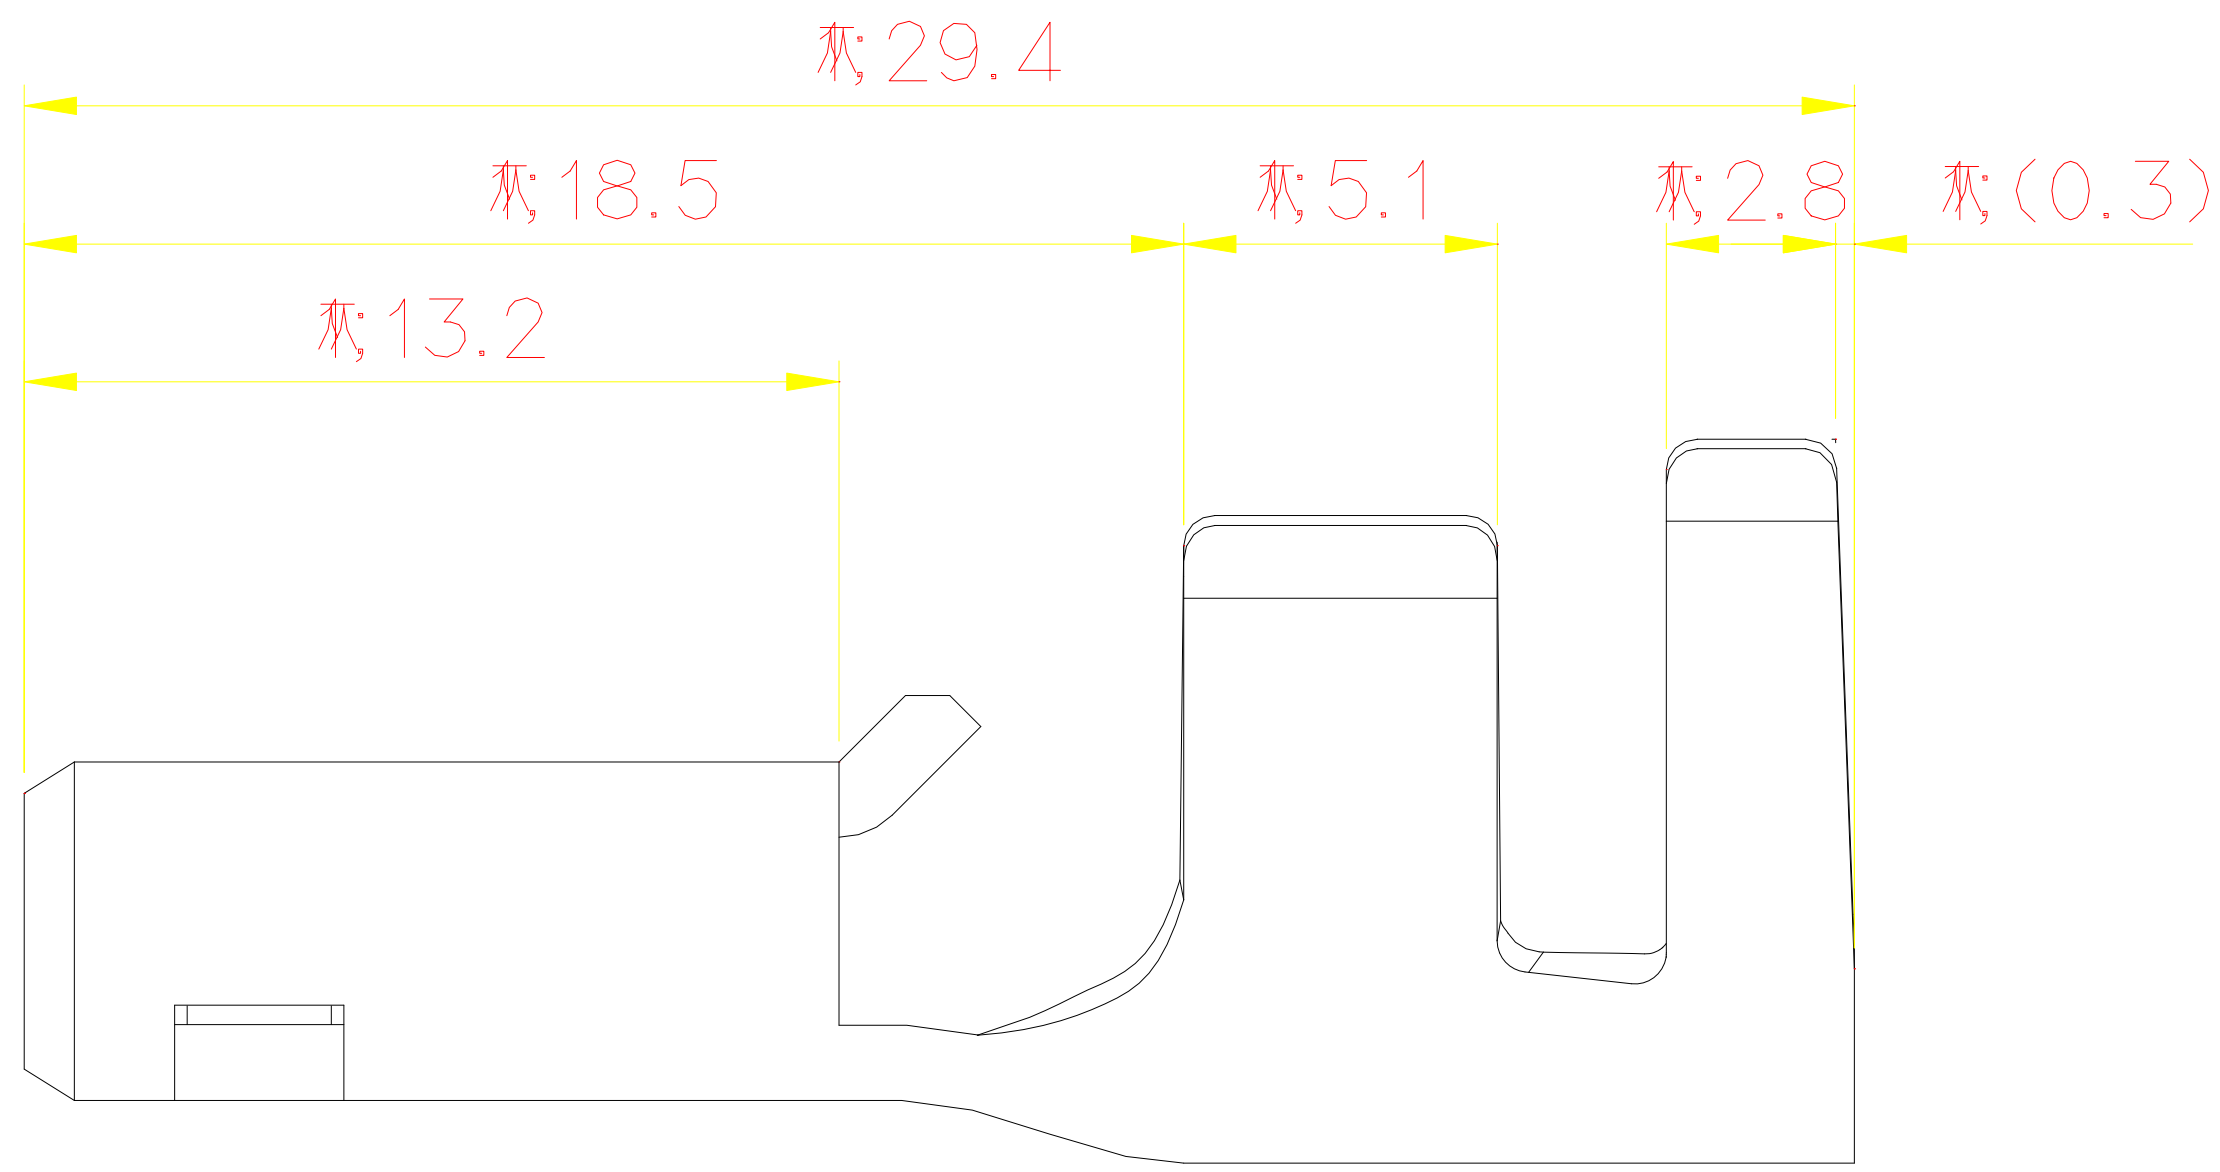
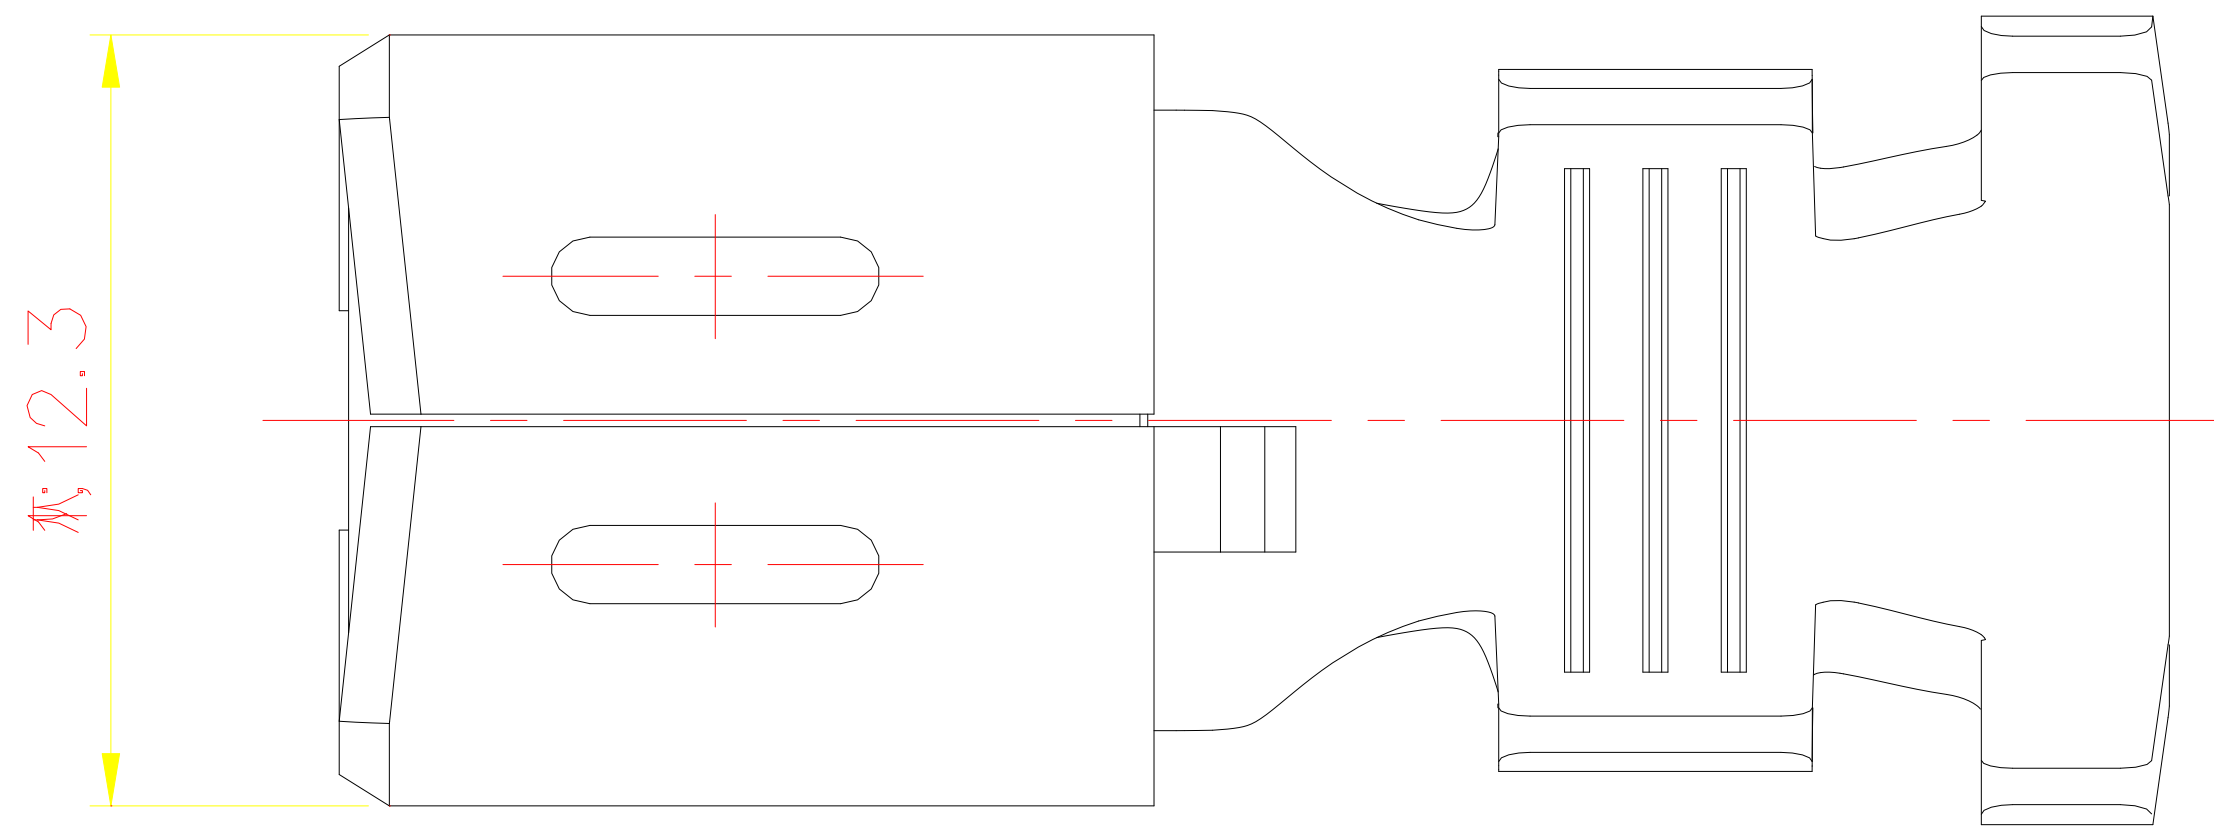


NO	PART NO	PART NAME	FINISH	MATERIAL
1	ST731133-3	GS 950 Female Terminal (L)	PRE-TIN	COPPER ALLOY 1.2t
	ST731134-3	GS 950 Female Terminal (E.L)	PRE-TIN	COPPER ALLOY 1.2t
2	-	GS 950 Spring	NATURAL	SUS 0.3t

BARREL PART NO.	WIRE RANGE	L1	L2	W1±0.15	W2±0.15	P1	P2
ST731133-3	AEXF 8.0 ~ 15.0	10.4	11.55	10.9	12.5	R2.9	R3.7
ST731134-3	AEXF 20.0	11.7	12.8	12.5	14.0	R3.2	R4.3

GENERAL TOLERANCE (TERMINAL)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

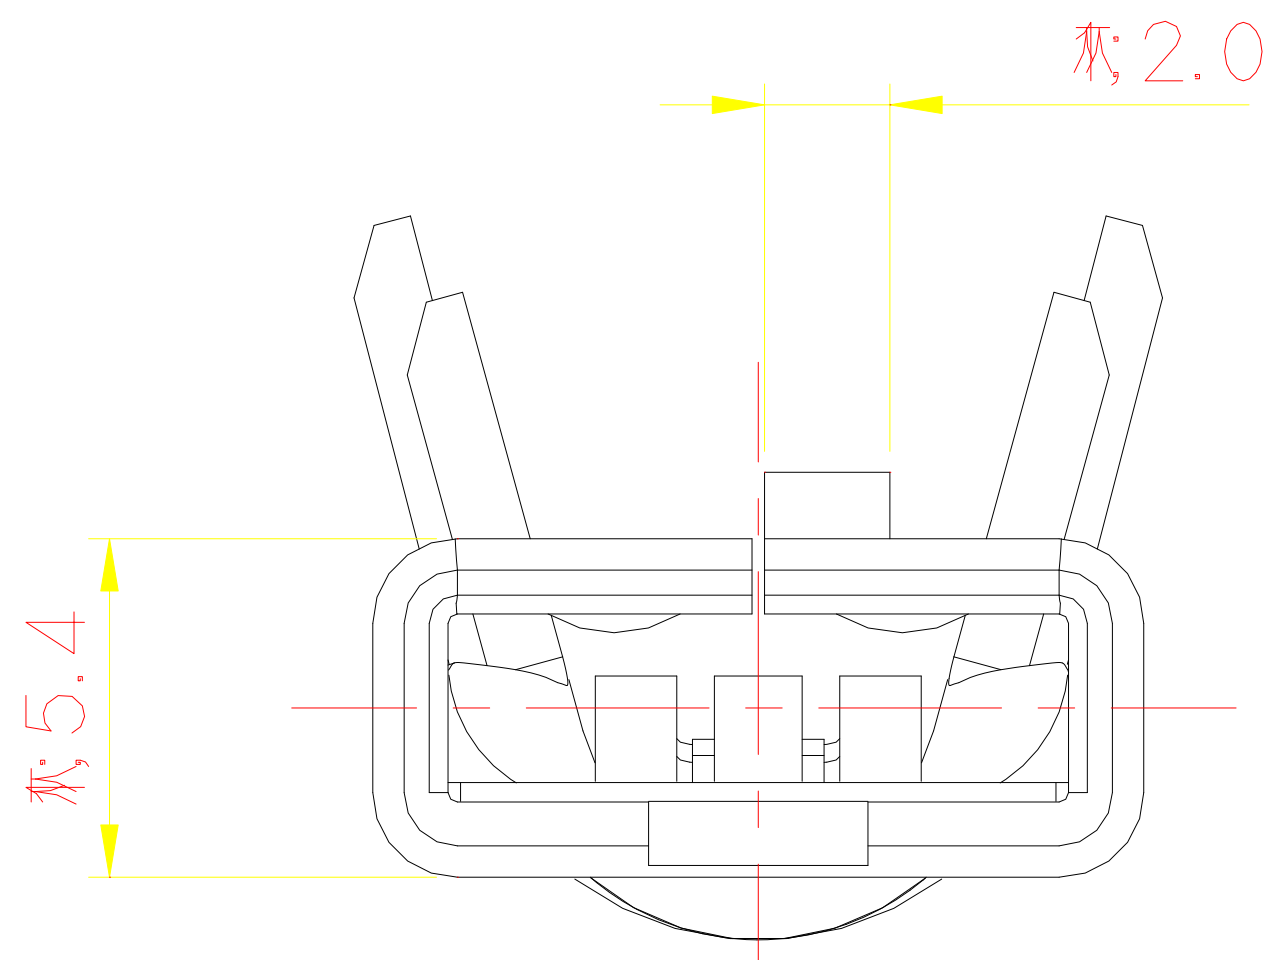


주 기

- 1. 기능상 유해한 CRACK, BURR 등이 없을것.
- 2. 지시하지 않은 반경 R은 0.5로 한다.

NOTE

- 1. MUST BE FREE OF CRACK AND BURR THAT AFFECT FUNCTION.
- 2. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.5 RADIUS.

ISSUE MARK	

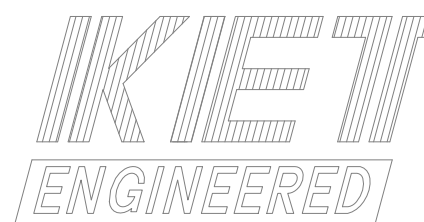						MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., L	
						FINISH	SEE TABLE		
						WIRE RANGE	SEE TABLE		CLASS 950
						INSULATION	SEE TABLE		TYPE REC.
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
	DR. LKM. 2010.01.24		CHK.				SEE TABLE	3/1	ST731133-3 , 134-3
CHK.		01/24	APP.			01/24	PART NAME 950 FEMALE TERMINAL (L) , (E.L)		