



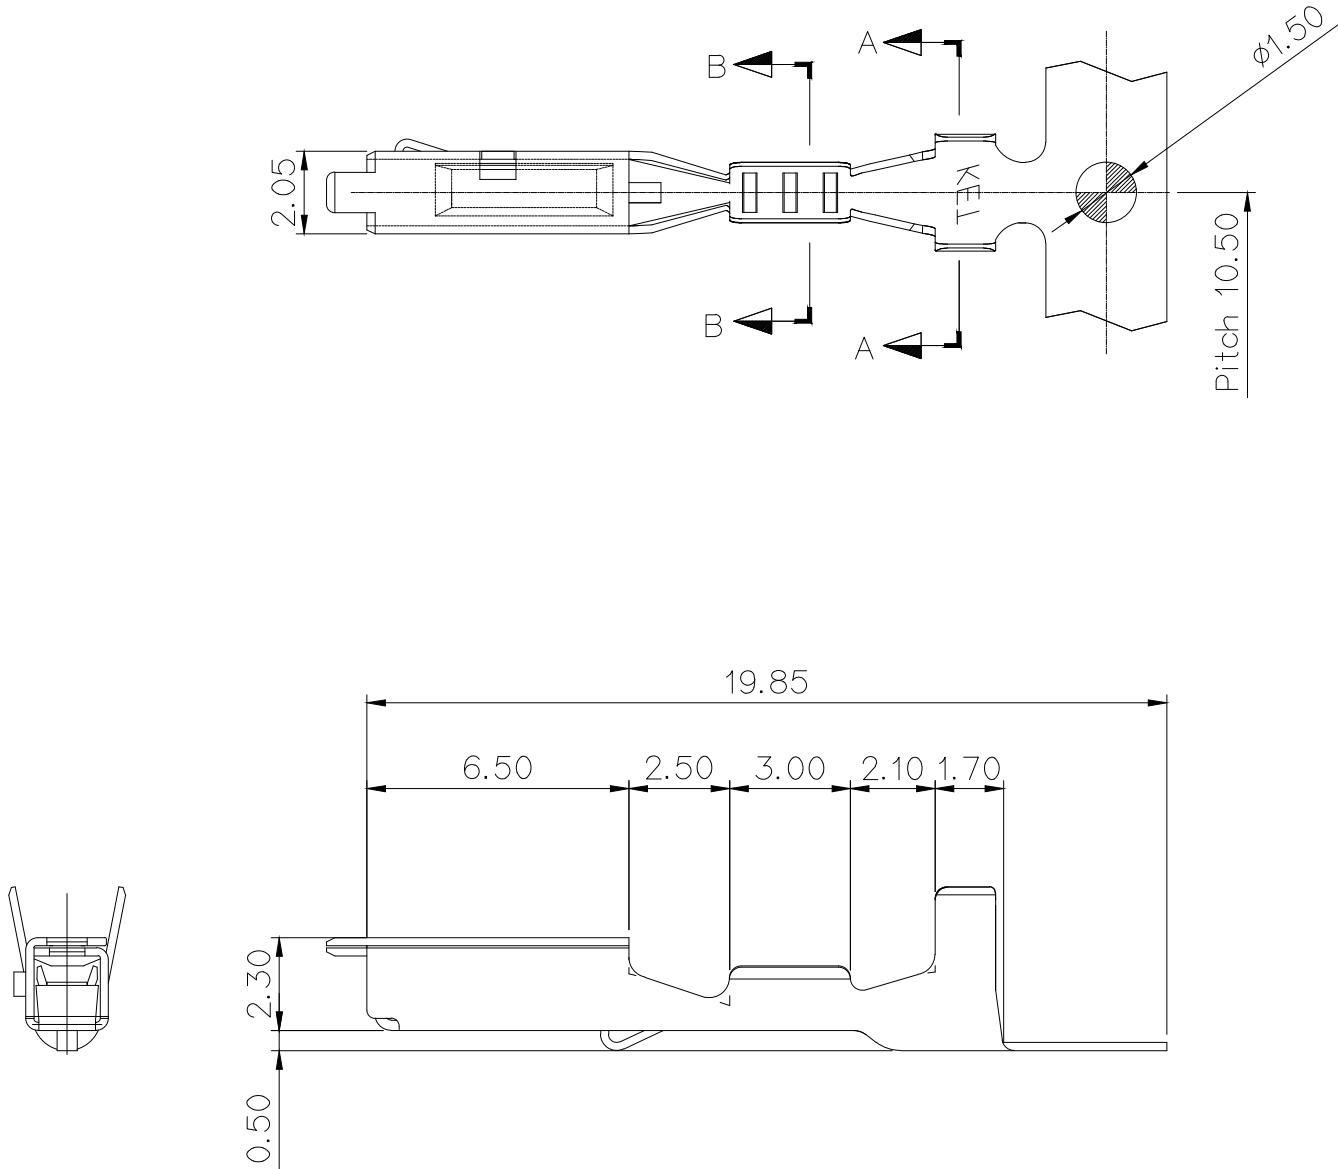


NOTE

- 기능상 유해한 흠,변형 및 BURR가 없을 것.
- 적용 CONN'T: 050 SERIES CONNECTOR
- 적용 상대 TAB. TERMINAL : ST741175, 741357-3SS
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,PBBs PBDEs)은 EU ELV 지침 및 ROHS 법규에서 지정한 최대허용 농도를 초과해서는 안된다.

GENERAL TOLERANCE (TERMINAL)						USED ON
10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±0.5	±30'	0.1	



SECTION B-B

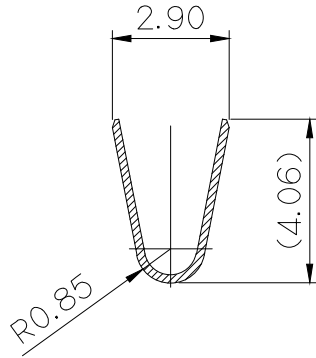

SECTION C-C

NOTE


- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE CONN'T: 050 SERIES CONNECTOR
- APPLICABLE TAB TERMINAL : ST741175, 741357-3SS
- 6 HAZARDOUS SUBSTANCE IN PARTS (LEAD,MERCURY,CADMIUM HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED BY THE EU ELV DIRECTIVE & THE ROHS REGULATION..

APPROVED

2016-03-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK

					MATERIAL Copper Alloy		 KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH PRE-TIN				
					WIRE RANGE				
					INSULATION				
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 5/1	PART NO. ST731171-3SS
DR.	PSH	'15.07.28	CHK.	KSH	'15.07.28		PART NAME 050 FEMALE TERMINAL (SS) MK2		
CHK.			APP.	BUC	'15.07.28				