


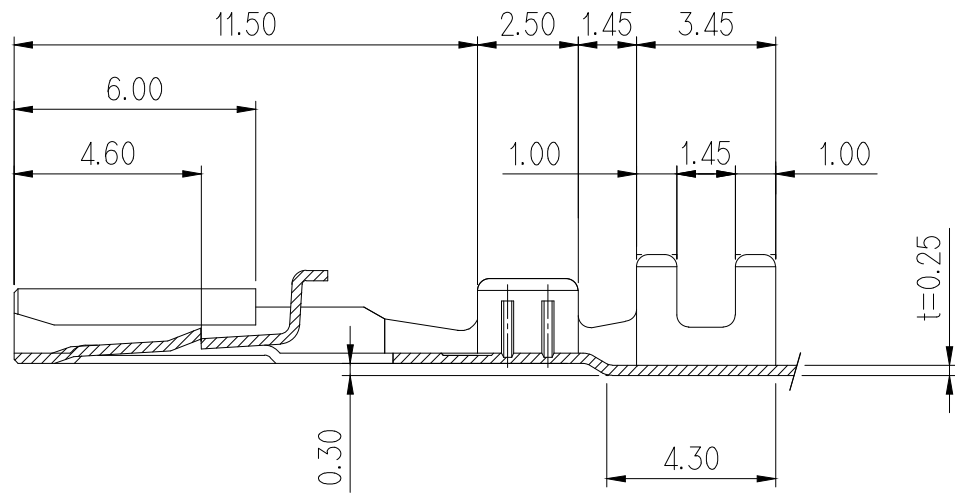
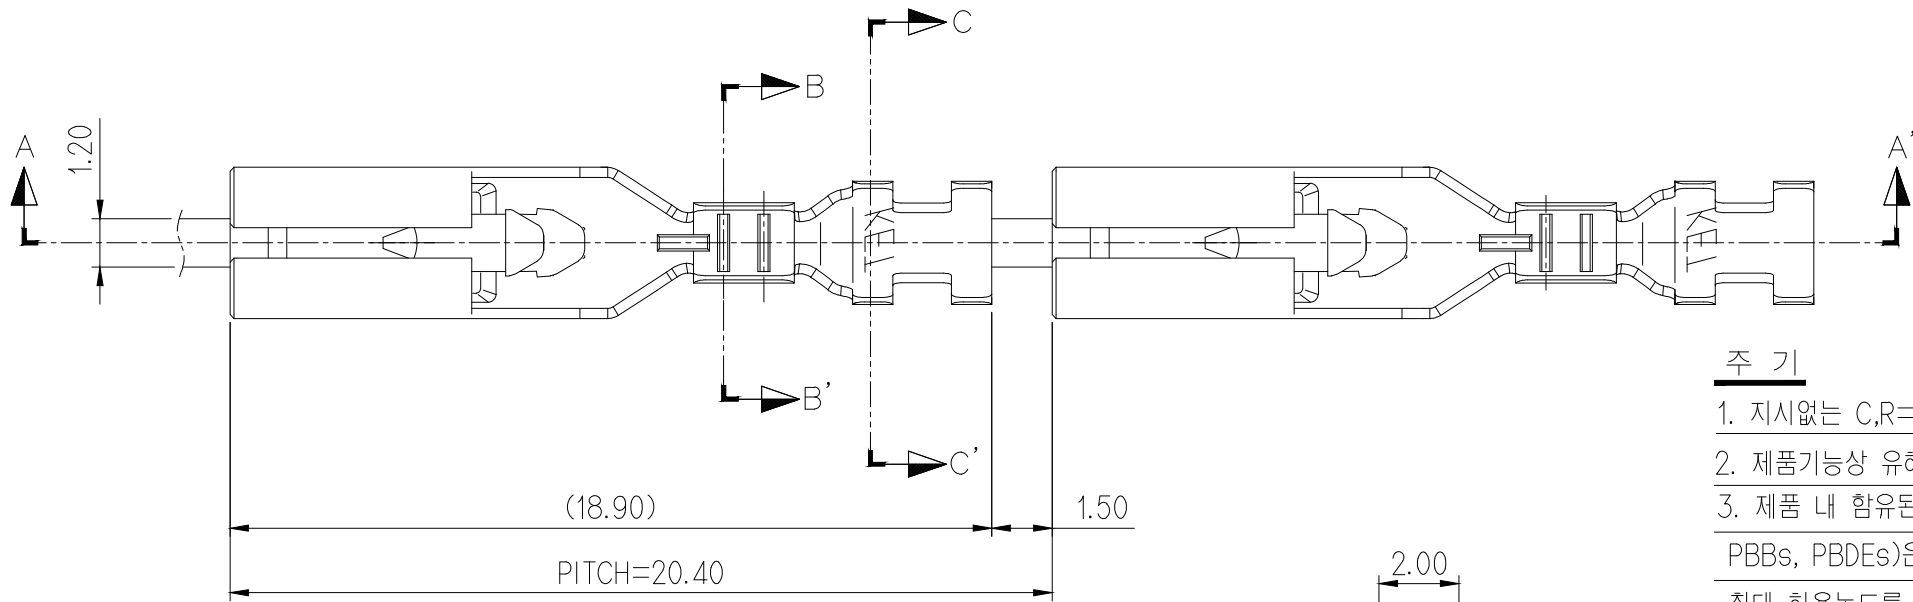
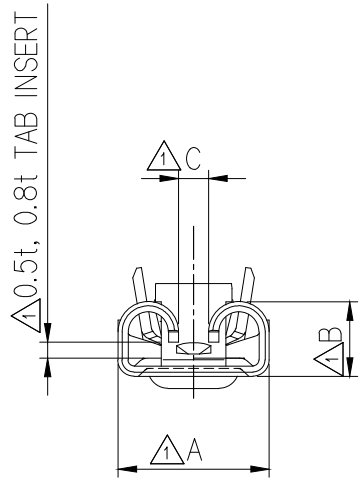





SECTION A-A'

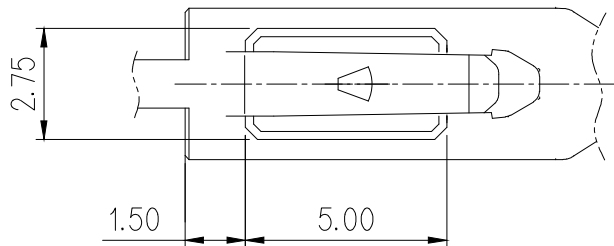

SECTION B-B'

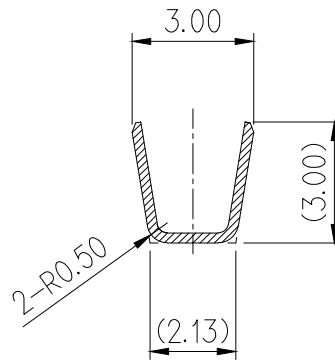

SECTION C-C'

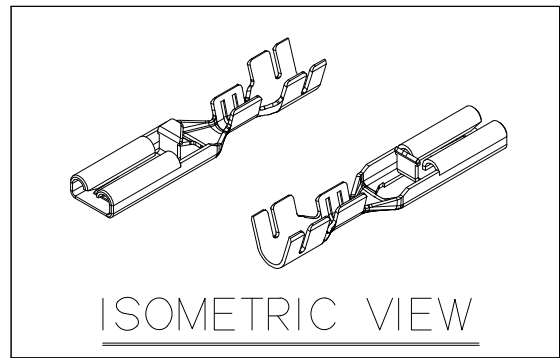

주 기

- 지시없는 C,R=0.3으로 한다.
- 제품기능상 유해한 BURR, CRACK 등이 없을것.
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

NOTE

- UNLESS OTHERWISE SPECIFIED ALL CHAMFER, RADII TO BE 0.3
- MUST BE FREE OF BURR, CRACK AND IMPERFECTION THAT AFFECT FUNCTION.
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER DIRECTIVE & RoHS REGULATION

△	PART NO.	APPLICABLE TAB	A	B	C
	ST731177-3	0.5t	3.80	1.85	0.75
	ST731177-6	0.8t	3.90	1.95	0.90

APPROVED

2020-12-09

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

						MATERIAL		BRASS		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH		PRE-TIN			
						WIRE RANGE		#20 — #24			CLASS
						INSULATION				TYPE	
	ECO-2002-164 근거 도면 재작성		YHJ	KSH	KHG	'20.02.19					
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE		TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 5/1	PART NO.  ST731177-3,-6
DR. PJM 09.06.03			CHK.			6/5		PART NAME			110 P-LOCK TERMINAL (S)
CHK.			APP.			6/5					