

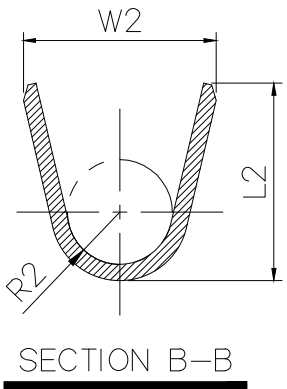


SEE TABLE
PART NO.


CUSTOMER DRAWING

DIMENSIONS IN MM




BARREL PART NO.	WIRE RANGE	R1	L1	W1	R2	L2	W2	K1	Δ_a
Δ ST731560-3	FLRY-B 5.0	R1.5	5.8	4.7	R2.3	7.2	6.2	3.5	3.3
Δ ST731459-3	FLRY 4.0	R1.2	4.8	4.8	R1.65	6.65	6.15	4.0	2.8
ST731209-3	Δ AVS 2.5, FLRY 2.5 AVS 3.0	R1.2	4.8	4.8	R1.65	5.7	5.7	4.0	2.8
ST731210-3	AVS 1.0~2.0 Δ AVSSXF 1.5	R0.8	3.65	3.55	R1.3	4.9	4.8	3.5	2.8
Δ ST731484-3	Δ FLALRY 2.0							3.5	2.8
Δ ST731492-3	Δ FLALUY 1.25	R0.55	3.5	3.0	R0.9	4.1	3.9	3.0	2.8
ST731211-3	AVS 0.5~0.85	R0.55	3.0	2.8	R0.9	4.1	3.9	3.0	2.8
Δ ST731493-3	Δ FLALUY 0.75					3.4	3.4	3.0	2.8

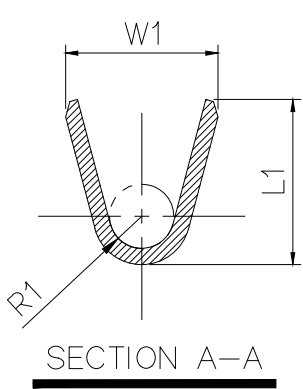

Δ DETAIL "D"(ST731560-3)
(S=5/1)



Δ DETAIL "E"(ST731560-3)
(S=5/1)

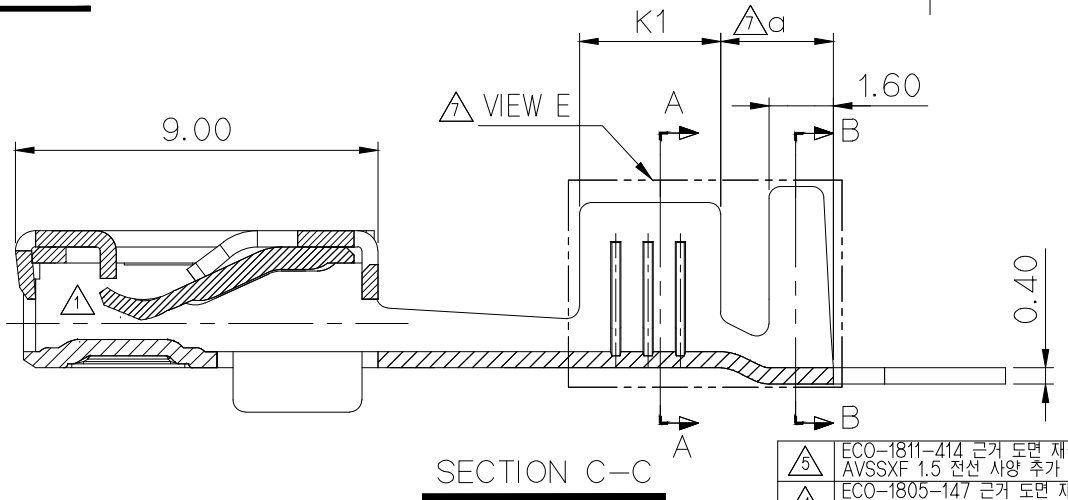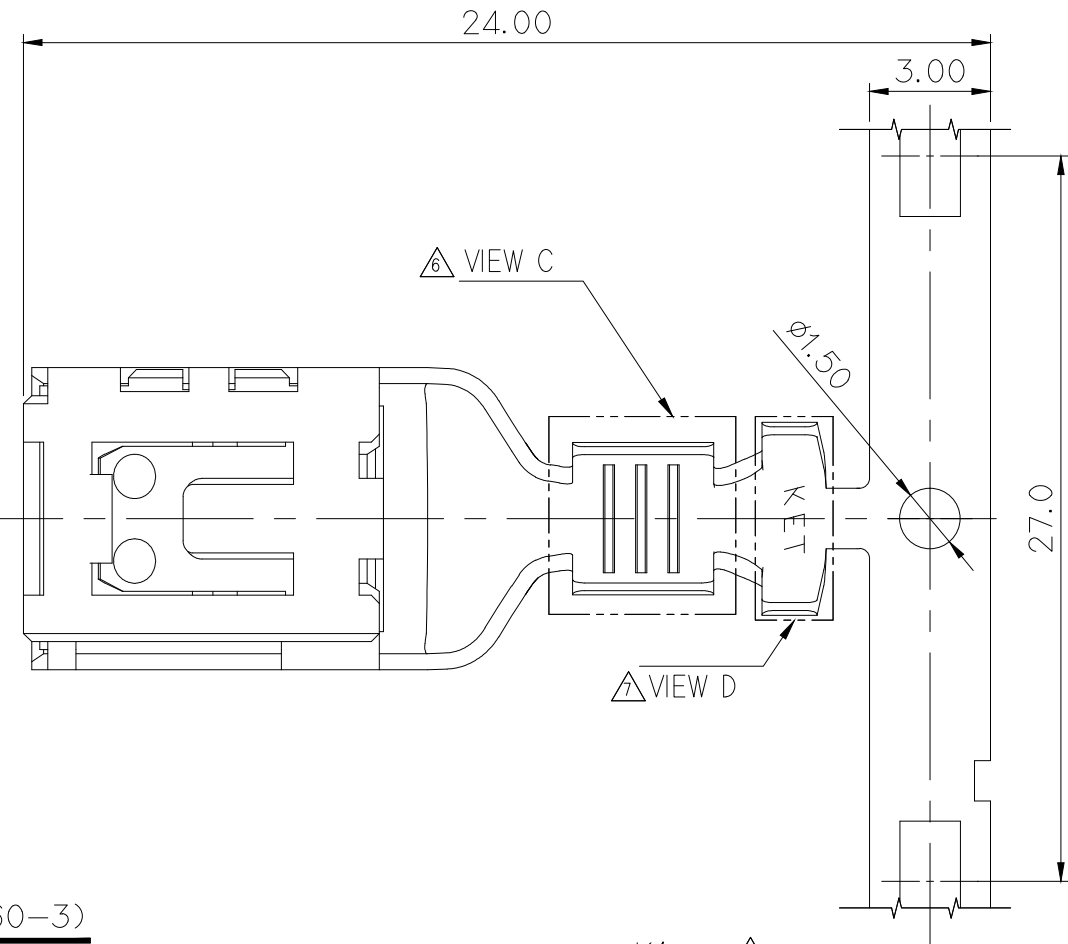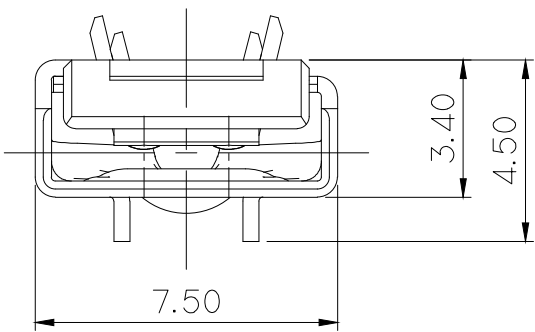

주 기

- 기능상 유해한 흠, 변형 및 BURR 없을 것.
- 적용 상대 MALE TERMINAL : ST741206,ST741207,ST741208
 Δ ST741415-3, Δ ST741416-3, Δ ST741417-3, Δ ST741455-3
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE MALE TERMINAL : ST741206,ST741207,ST741208
 Δ ST741415-3, Δ ST741416-3, Δ ST741417-3, Δ ST741455-3
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY,CADMIUM HEXAVALENT CHROMIUM,PBBs,PBDEs) SHOULD MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

Δ VIEW C
ST731459
ST731209
ST731210
ST731211

Δ VIEW C
ST731484
ST731492
ST731493

APPROVED

2021-01-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

Δ	ECO-2003-325 근거 도면 수정 5.0sq Barrel Modify 개발	SSW	HJE	CKY	20.03.19
Δ	ECO-1909-108 근거 도면 수정 알루미늄 세레이션 형상 CU도면 추가	JKH	HJE	CKY	19.11.27

Δ	ECO-1811-414 근거 도면 재작성 AVSSXF 1.5 전선 사양 추가	LJH	HJE	LSY	'18.11.26
Δ	ECO-1805-147 근거 도면 재작성 AI전선전용 Modify 개발	SSW	LSY	SUK	'18.05.11
Δ	ECO-1712-053 근거 도면 재작성 AI전선전용 Modify 개발	HJE	WSW	CMS	'17.12.05
Δ	ECO-1705-211 근거 도면 재작성 XL Barrel Modify 개발	SSW	CMS	LJE	'17.05.17
Δ	ECO-1303-098 근거 도면 재작성	HSR			'13.03.28
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE
DR.	YSW	'11.12.27	CHK.		
CHK.	HEM	'11.12.27	APP.	HSH	'11.12.27

MATERIAL	COPPER-ALLOY	KOREA ELECTRIC TERMINAL CO., LTD.
FINISH	PRE-TIN	
WIRE RANGE	SEE TABLE	CLASS 630(250)
INSULATION	SEE TABLE	TYPE 비방수
TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 5/1
PART NAME	630(250) FEMALE TERMINAL(Δ XXL),(Δ XL),(L),(M),(S)	