





GENERAL TOLERANCE (TERMINAL)				USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT
±0.2	±0.25	±0.3	±30'	0.1

NOTE

1. 6 HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION
2. APPLICABLE HOUSING : MG615253
3. MUST BE FREE OF BURR, MARK AND IMPERFECTION THAT AFFECT FUCNTION.

주 기

1. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
2. 적용 HOUSING : MG615253
3. 기능상 유해한 BURR, 찍힘 및 결함 없을 것.

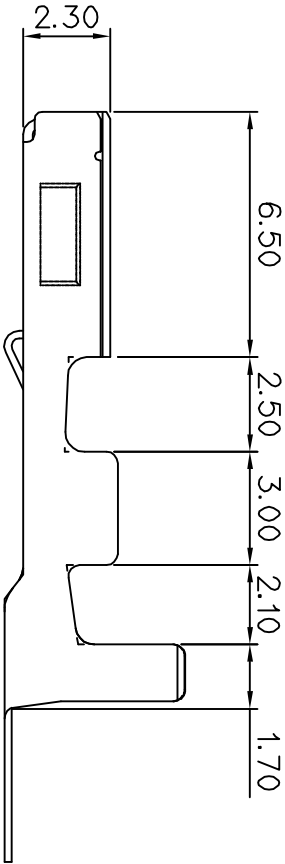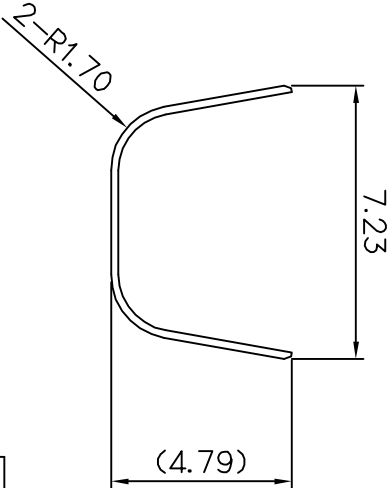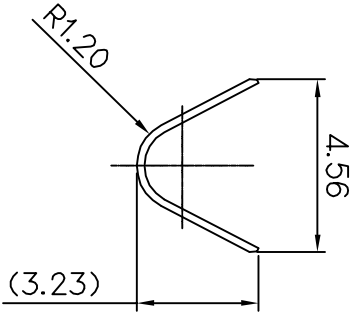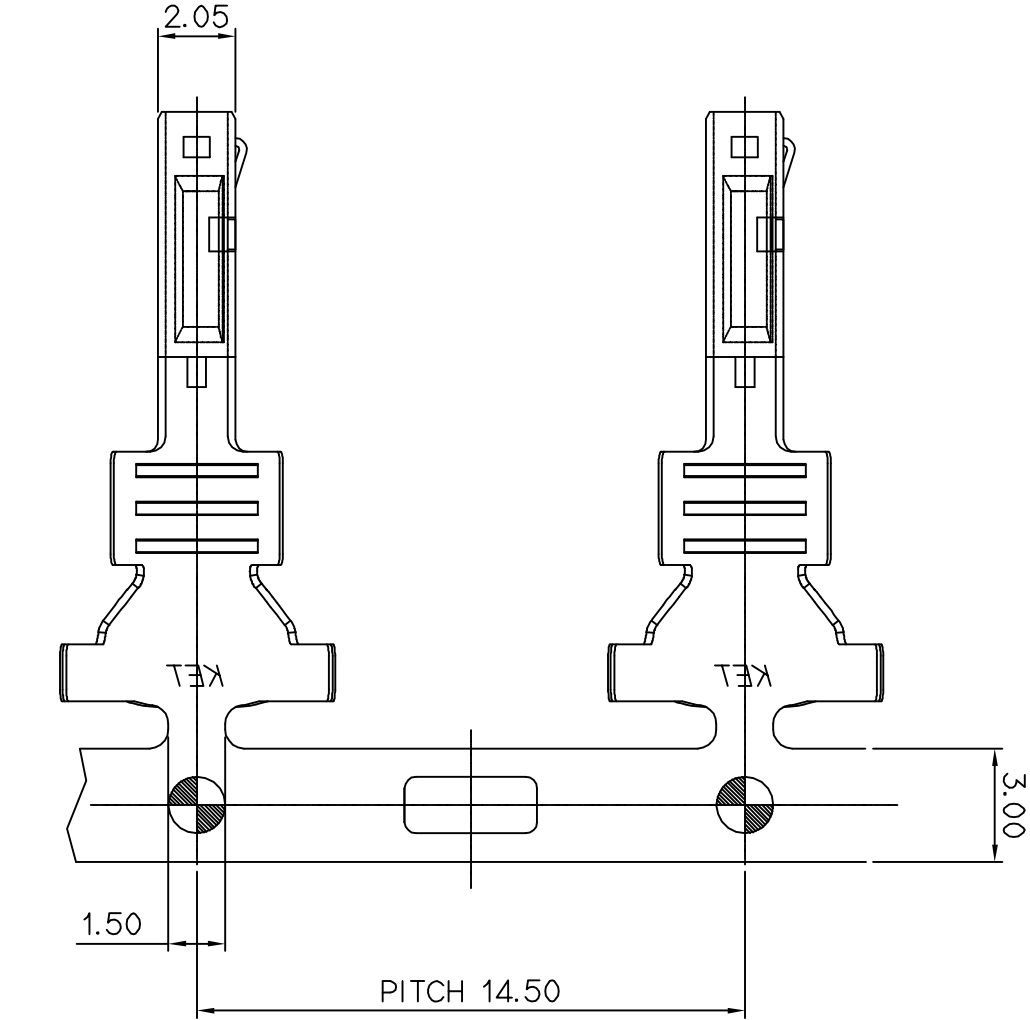

										ISSUE MARK	
						MATERIAL	BRONZE	 KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.			
						FINISH	PRE-TIN				
						WIRE RANGE					
						INSULATION					
								CLASS	050		
								TYPE			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE AS NOTED	SEE TABLE	SCALE	PART NO.		
DR.		CHK.						5/1	ST731303		
CHK.		APP.				PART NAME 050 FEMALE TERMINAL (L)					

CUSTOMER DRAWING

PART NO. ST731303

(DIMENSIONS IN MM)