






SECTION B-B



SECTION C-C
ST731363 (S)



SECTION C-C
ST731364 (M)

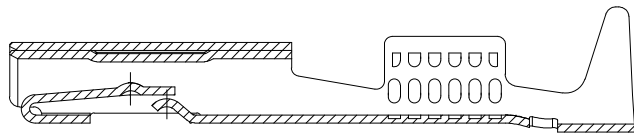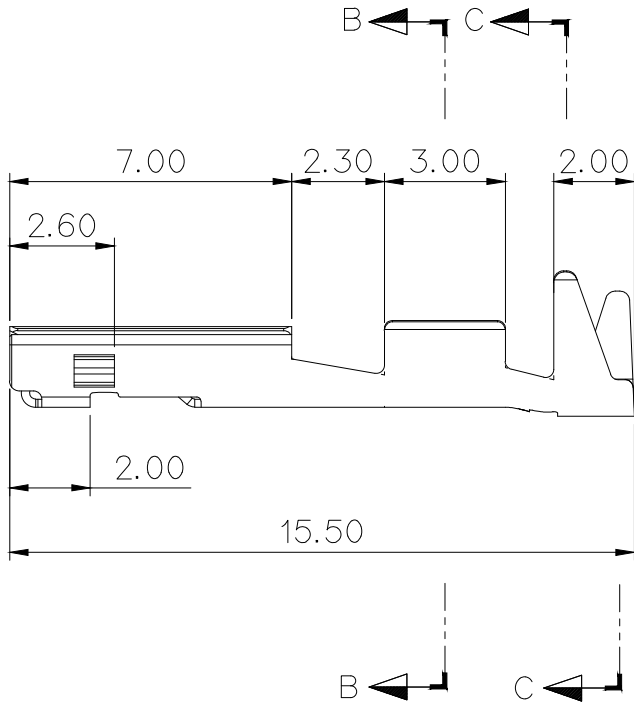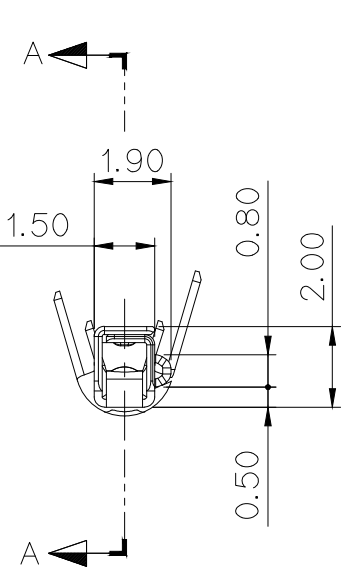


SECTION A-A

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.2R ADIUS, CHAMFER 0.1.
2. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE MALE TERMINAL : ST741337-3, ST741338-3
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

GENERAL TOLERANCE (TERMINAL)						USED ON
10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±0.5	±30'	0.1	

PART NO.	BARREL	WIRE RANGE (mm ²)	WIRE BARREL			INSULATION BARREL	
			W1	H1	R1	H2-1	H2-2
ST731363 (S)		CHFUS 0.22, AESSXF 0.22△	1.50	1.60	0.6	3.10	3.10
ST731364 (M)		AESSXF 0.3 - 0.5△	1.95	2.15	0.7	3.10	3.60

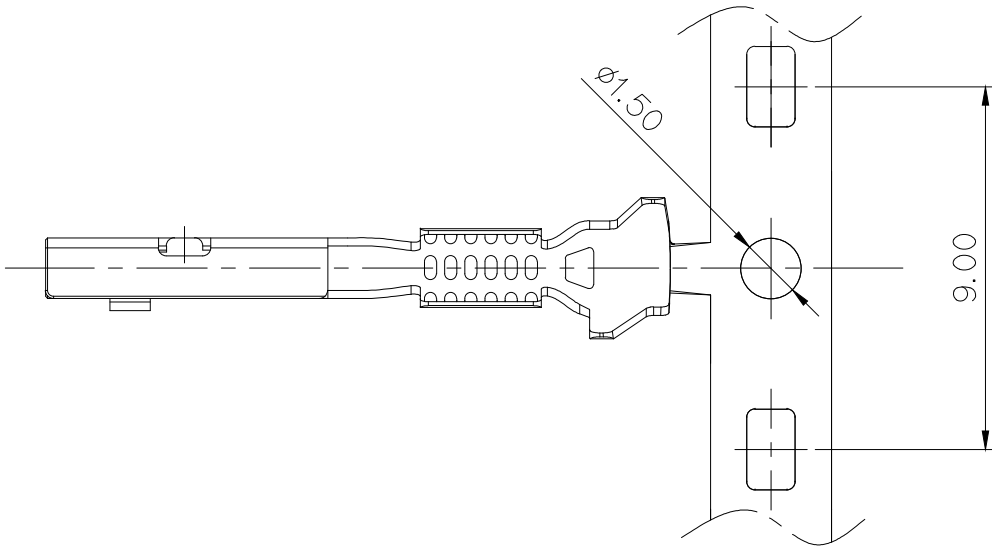

주 기

1. 지시없는 R은 0.2, C는 0.1로 한다
2. 기능상 유해한 흠,변형 및 BURR가 없을것.
3. 적용 상대 MALE TERMINAL : ST741337-3, ST741338-3
4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2016-03-09

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Develop
ment Team 2

ISSUE MARK

						MATERIAL	COPPER ALLOY	 KOREA ELECTRIC TERMINAL CO., LTD.				
						FINISH	Pre-Tin					
						WIRE RANGE	SEE TABLE		CLASS	.025		
						INSULATION	SEE TABLE		TYPE			
△	ECO-1503-334 근거 도면 재작성		PJH	CKY	CWK	15.03.24						
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE	5/1	PART NO.	SEE TABLE
DR.	KYJ	12.04.10	CHK.	KJS	12.04.10	025 WP FEMALE TERMINAL						
CHK.	HEM	12.04.10	APP.	HSH	12.04.10							