
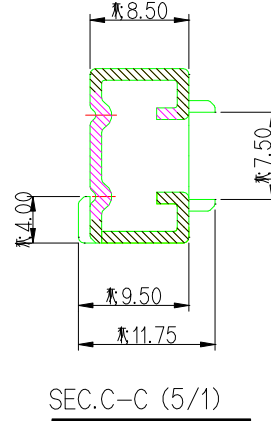



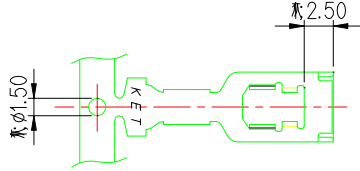
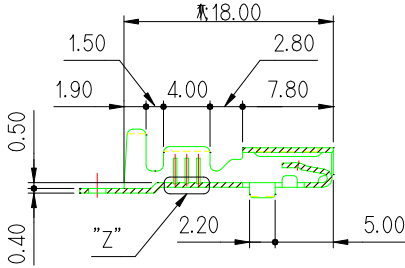


PART NO.	BARREL	WIRE RANGE (mm 2)	WIRE BARREL			INSULATION BARREL		
			A	B	R1	C	D	R2
ST731376-3		AVS 2.0~3.0 ,AVSS 2f	4.4	4.6	1.5	6.2	5.6	2.4

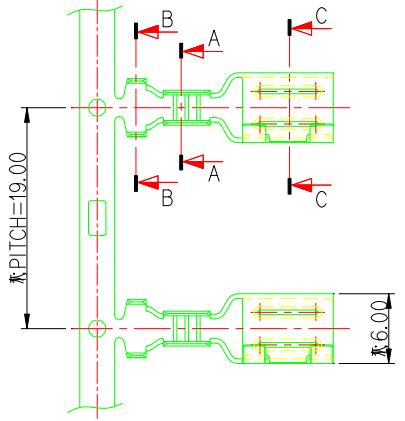

NOTE

1. 기능상 유해한 BURR 및 변형이 없을것.

2. 적용 TAB TM'L : ST740631,2,3

3. TERMINAL 삽,발거력 : IN,OUT(초기) : 1.2Kgf 이하

OUT(10회후) : 0.3Kgf 이상

GENERAL TOLERANCE (TERMINAL)					USED ON
50MAX	100MAX	250MAX	ANGLE	ECCENT	
±0.20	±0.30	±0.50	±30'	0.10	

APPROVED

2015-06-25

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Development Team 1

				MATERIAL	PMC26R(TP)	 KOREA ELECTRIC TERMINAL CO., LTD.			
				FINISH	PRE-TIN				
				WIRE RANGE	SEE TABLE		CLASS 187 II		
				INSULATION			TYPE		
LTR	REVISION RECORD		DR.	CHK.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO.	ST731376-3
DR.	KJH 13.04.19		CHK.			PART NAME			
CHK.	CSH 13.04.19		APP.	HSH 13.04.19		187 II REC. TERMINAL(비방수)			

ISSUE MARK