

NO.	PART NO.	PART NAME.	WIRE SIZE		INSULATION DIAMETER	WIRE BARREL		
			mm ²	AWG		WR	WW	WH
1	ST731382-3	N064 FEMALE TML(M)	0.3 - 0.5	20 - 22	1.50 - 1.85	0.8	1.82	2.15
2	ST731383-3	N064 FEMALE TML(L)	0.75 - 0.8	18	MAX 2.06	1.0	1.96	2.55





GENERAL TOLERANCE (TERMINAL)

10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT
±0.2	±0.25	±0.3	±0.5	±30'	0.1



USED ON

주 기

1. 지시없는 C,R=0.30으로 한다.
2. 기능상 유해한 휨,변형 및 BURR가 없을것.
3. 적용TAB THICKNESS : 0.64±0.03
4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

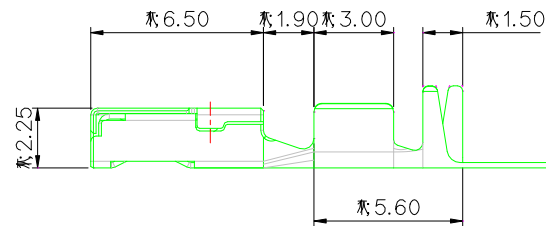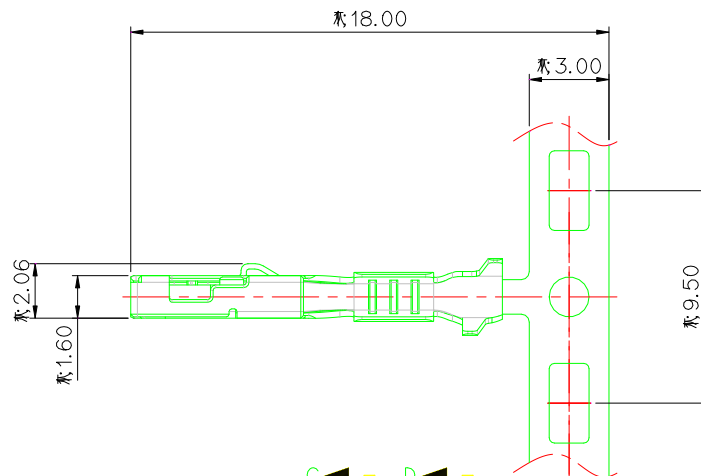

SECTION A-A

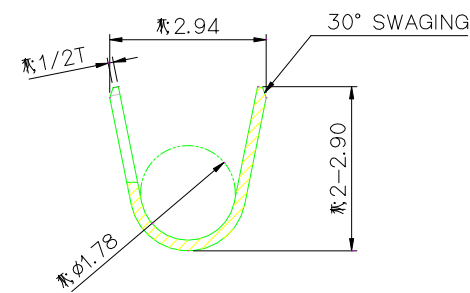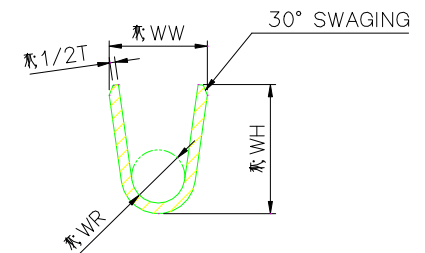SECTION D-D
(S=10/1)SECTION C-C
(S=10/1)

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
2. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE TAB THICKNESS : 0.64±0.03
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2015-06-25

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Development Team 2

ISSUE MARK

품 번	처 리
ST731382-3	- Cu 하지도금 두께 : 0.3 ~ 0.8μm
ST731383-3	- 광택 석도금 - 석도금 두께 : 0.8 ~ 1.8μm

						MATERIAL COPPER ALLOY		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH Pre-Tin			
						WIRE RANGE			
						INSULATION			
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 5/1	PART NO.
DR.	CKY	'14.10.28	CHK.				SEE TABLE		SEE TABLE
CHK.			APP.	PART NAME N064 FEMALE TERMINAL					