

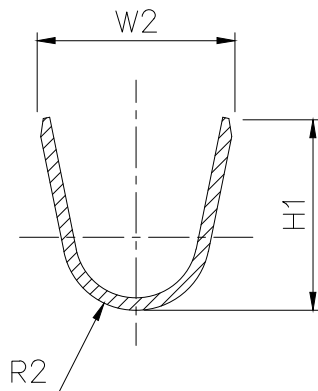
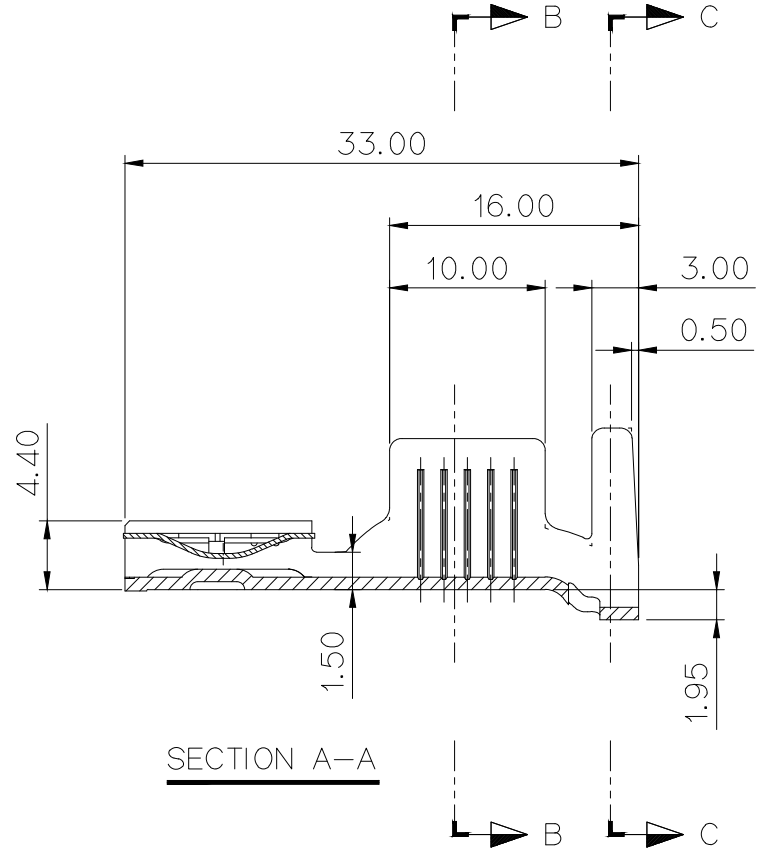



SECTION B-B

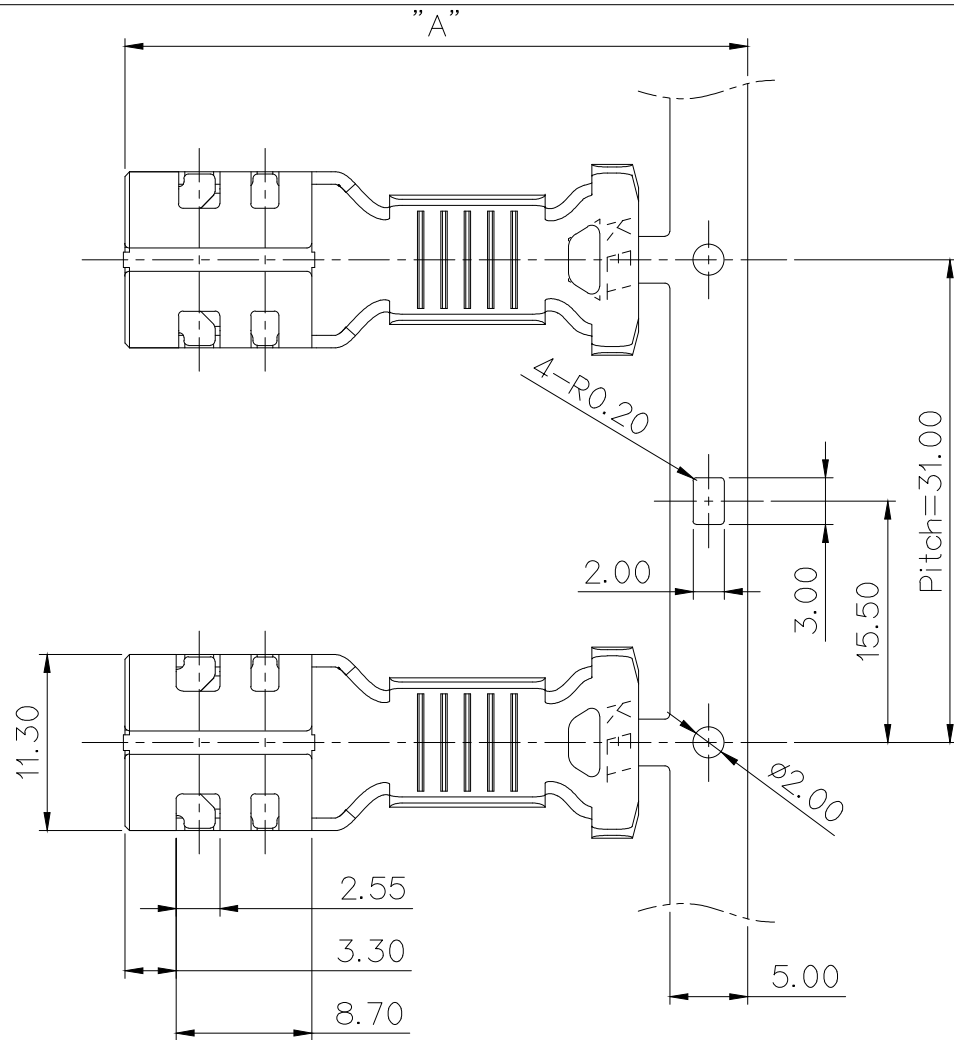

SECTION C-C

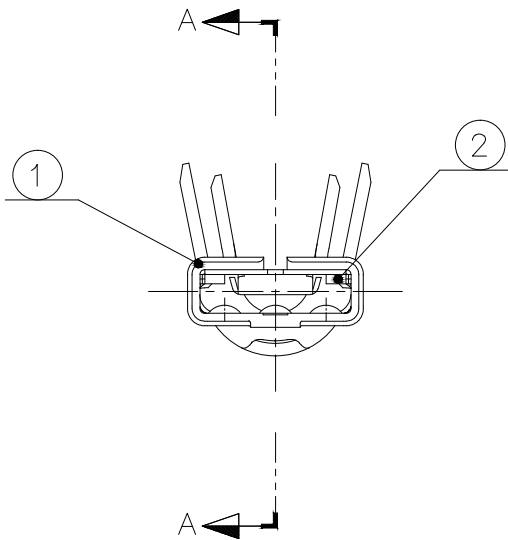

SECTION A-A

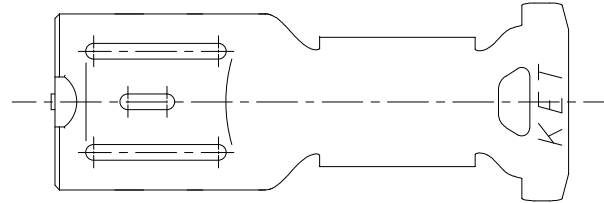

GENERAL TOLERANCE (TERMINAL)						USED ON
10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±0.5	±30'	0.1	

PART NO.	WIRE RANGE (mm ²)	WIRE BARREL			INSULATION BARREL		
		W1	H1	R1	W2	H2	R2
ST731392-S	AEXHSF 10-15	8.6	9.7	3.0	13.6	13.0	4.5

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE MALE TERMINAL : ST741353
- PLATING SPECIFICATION ("A")
 - GROUND : Ni 2.0~4.0um(Matted), Ag 3.0~5.0um (Ag CONTENT : 99.70~99.90%)
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO	PART NO.	NAME	MATERIAL	FINISH	QTY.
1	ST731392-S	375 WP FEMALE TERMINAL	Copper-Alloy	Ag 선도금	1
2	ST792559	375 WP FEMALE TERMINAL SPRING	SUS	-	1

주 기

- 기능상 유해한 BURR 및 CRACK 등이 없을 것.
- 적용 MALE TERMINAL : ST741353
- 도금 사양 ("A")
 - 하지 : Ni 2.0~4.0um(무광), Ag : 3.0~5.0um (Ag 함유량 : 99.70~99.90%)
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2016-02-25

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Development Team 2

ISSUE MARK

							MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
							FINISH	SEE TABLE	
							WIRE RANGE	SEE TABLE	
							INSULATION	SEE TABLE	
LTR	REVISION RECORD	DR. CHK.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO. ST731392
DR.	HSR 14.10.27	CHK.				PART NAME			
CHK.	CKY 14.10.27	APP. CWK 14.10.27				375 WP FEMALE TERMINAL			