

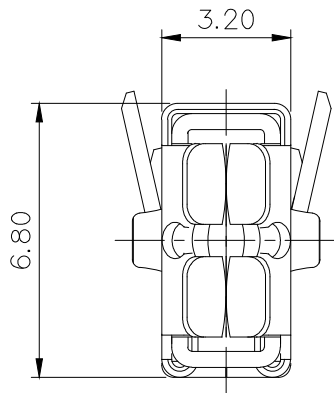
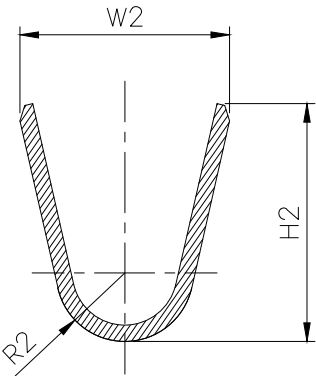



SECTION A-A'

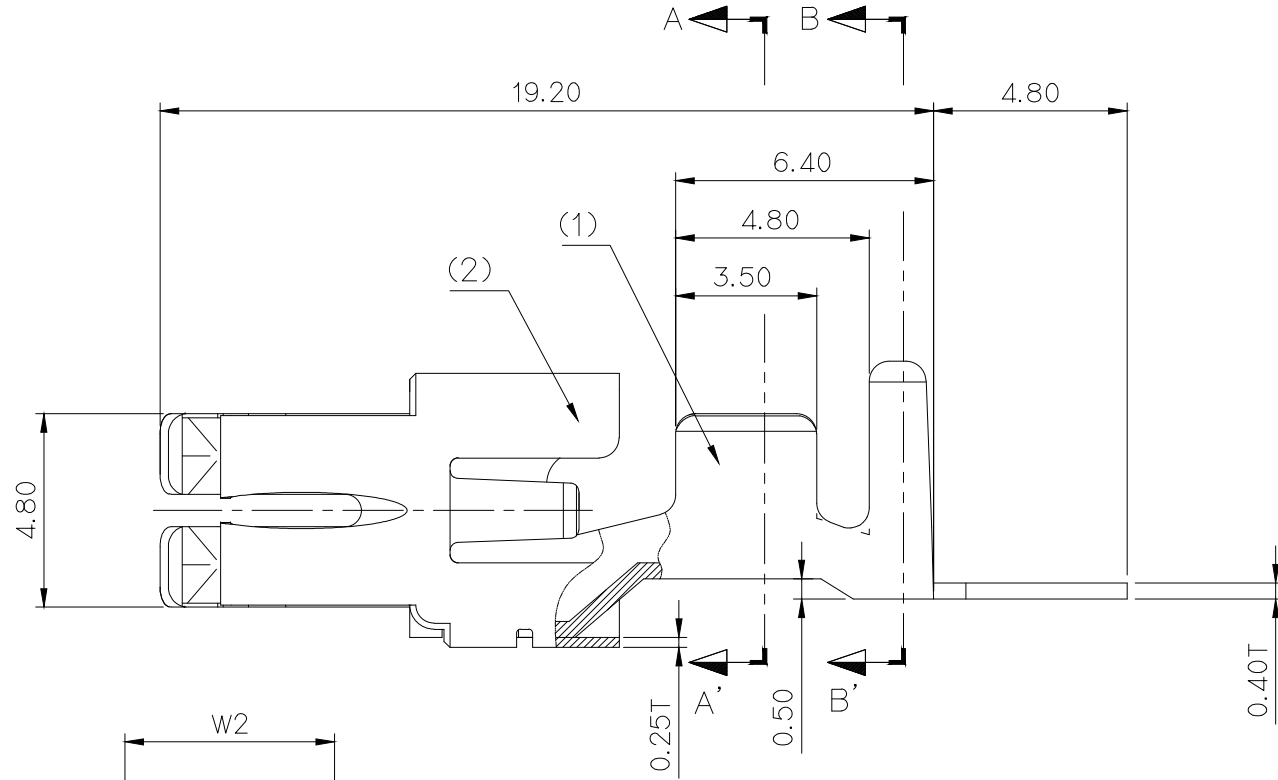

SECTION B-B'

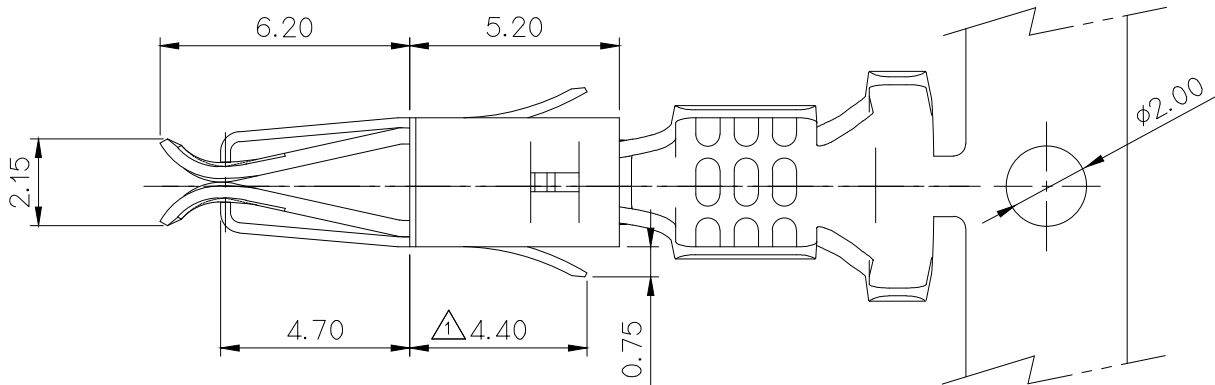

GENERAL TOLERANCE (TERMINAL)						USED ON
10MAX	20MAX	45MAX	45VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±0.5	±30'	0.1	

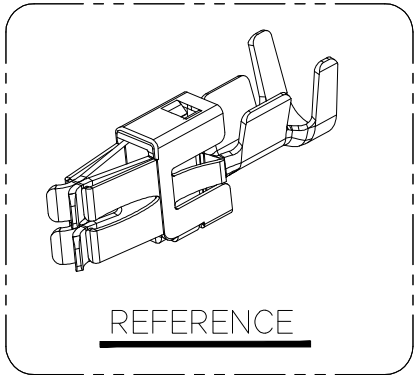

REFERENCE

주 기

- 지시없는 R은 0.3, C는 0.1로 한다.
- 기능상 유해한 BURR가 없을것.
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3RADIUS, CHAMFER 0.1.
- MUST BE FREE OF BURR AND IMPERFECTION THAT AFFECT FUNCTION.
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO	PART NAME	PART NO.	MATERIAL	FINISH	QTY.
1	250 SLIP-IN FEMALE TM'L	ST731393-3T	COPPER-ALLOY	PRE-TIN	1
		ST731393-3M			
2	250 SLIP-IN FEMALE TM'L COVER	ST792551	SUS	Unplate	1

APPROVED

2021-10-22

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH SEE TABLE		
<u>3</u>	ECO-2107-225 근거 도면변경	LCM	PSH	KSH	'21.07.20	WIRE RANGE <u>3</u> / <u>2</u> SEE TABLE		CLASS 250
<u>2</u>	ECO-1910-190 근거 도면변경	YHJ	KSH	KHG	'19.10.16	INSULATION <u>3</u> / <u>2</u> SEE TABLE		MATERIAL SIZE
<u>1</u>	ECO-1406-113 근거 도면변경	KSH		BACK	06/16			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 5/1	PART NO. SEE TABLE
DR. KSH. 2014.04.25		CHK.				PART NAME 250 SLIP-IN FEMALE TERMINAL		
CHK.				APP. KSH. 2014.04.25				