


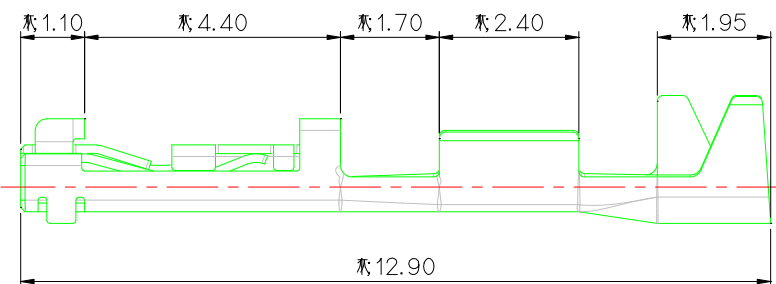

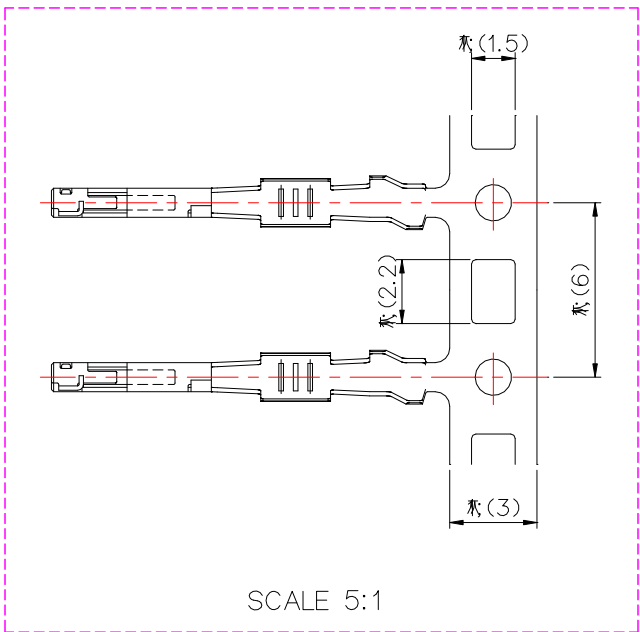


GENERAL TOLERANCE (TERMINAL)						USED ON
10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±0.5	±30'	0.1	



주 기

- 기능상 유해한 흠, 변형 및 BURR가 없을것.
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NO.	PART NO.	PART NAME	WIRE RANGE(mm ²)	WIRE BARREL		△ INS BARREL		
				A	B	C	D	E
1	ST731407-3	020 FEMALE TM'L (M)	CHFUS 0.13, 0.22	1.7	1.4	1.75	2.22	0.55
2	ST731403-3	020 FEMALE TM'L (L)	AVSS 0.3	1.8	1.7	2.1	2.90	0.70

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.



ISSUE MARK

				MATERIAL COPPER ALLOY		KOREA ELECTRIC TERMINAL CO., LTD.	
				FINISH PRE-TIN			
				WIRE RANGE SEE TABLE		CLASS 020	
				INSULATION SEE TABLE		TYPE	
LTR		REVISION RECORD		DR. CHK.		SCALE 10/1	
DR. SONG. Y. C		14'.06.13		CHK.		PART NO. SEE TABLE	
CHK. YOON. S. W		14'.09.19		APP. BIN. O. I		PART NAME 020 FEMALE TERMINAL	
				DATE 2014.12.09			
				TOLERANCE EXCEPT AS NOTED SEE TABLE			