

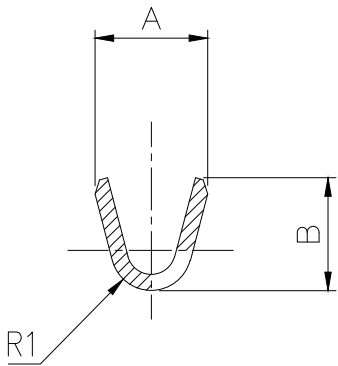
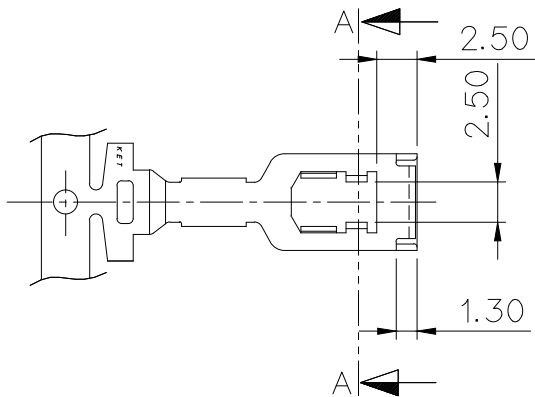
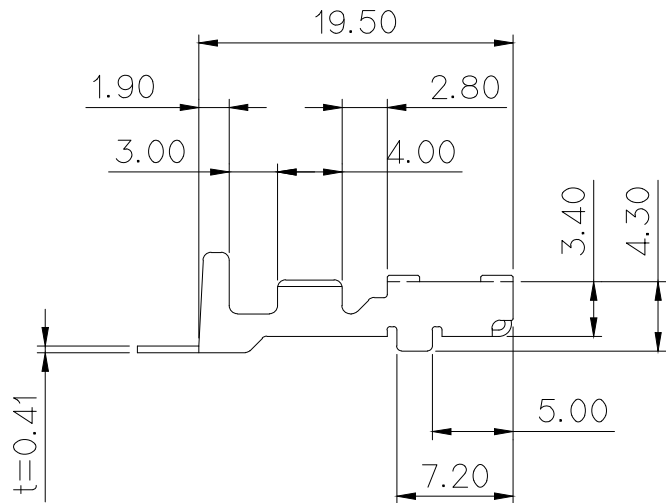


PART NO.	BARREL	WIRE RANGE(mm ²)	MATERIAL	FINISH	WIRE BARREL			적 용 WIRE SEAL
					A	B	R1	
ST730715-3		△AVSS 0.3 - 0.5	BRASS	PRE-TIN	2.8	2.8	R1.0	△MG681367(SS)
		AVS 0.3 - 0.85						MG681370(S)
ST730716-3		AVS 1.25 - 2.0			3.6	3.6	R1.3	MG681371(M)
ST730717-3		AVS 3.0	Copper-Alloy	△PRE-TIN	4.4	4.6	R1.5	MG681372(L)
△△ST731436-3		AEXHF-BS 3.0			4.4	4.6	R1.5	


GENERAL TOLERANCE (TERMINAL)					USED ON
50MAX	100MAX	250MAX	ANGLE	ECCENT	
±0.20	±0.30	±0.50	±30'	0.10	

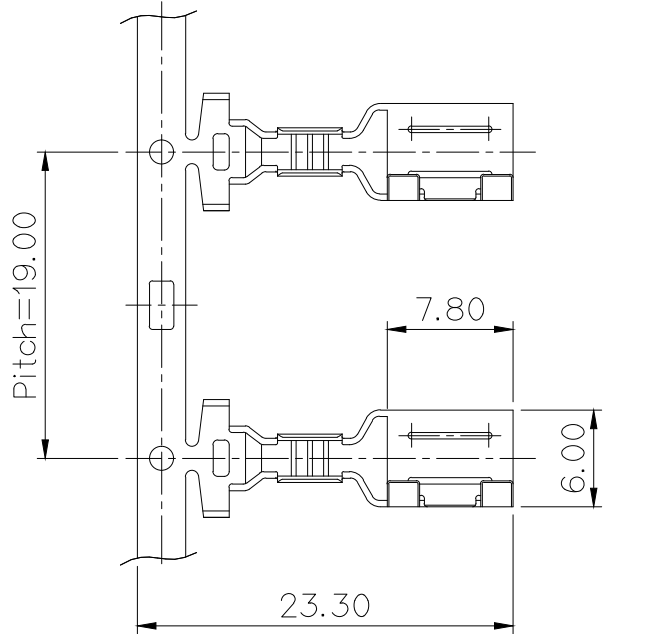

WIRE BARREL

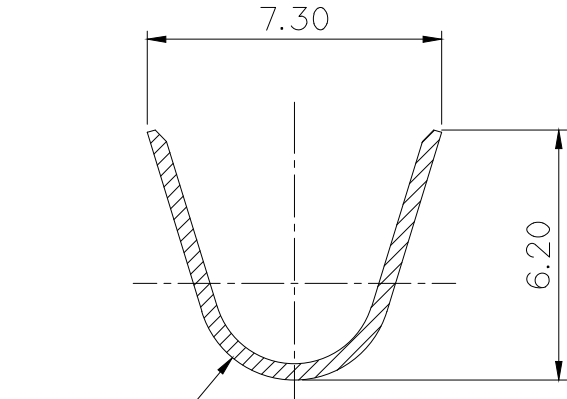

INSULATION BARREL

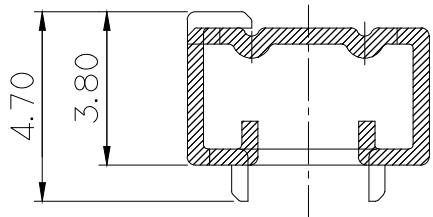

SECTION A-A

NOTE

- 1.기능상 유해한 BURR 및 변형이 없을 것.
- 2.적용 CONN'T: 1809 W/P SERIES
- 3.TERMINAL 삽, 발거력: IN, OUT(초기)- 1.0Kg이하
OUT(10회후) - 0.3Kg이상

					MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.	
④	ECO-1709-441 근거 도면 작성 WIRE SEAL (SS) 사양 추가	HJE WSW	CMS	17.09.29	FINISH SEE TABLE			
③	단자 도금 사양 변경(은도금 → 주석도금) (ECO-1611-522 근거)	HYJ LIM	SUK	'16.11.30	WIRE RANGE		CLASS	
②	ECO-1601-258 근거 도면 변경	LKS LJE	BIN	'16.01.18	INSULATION		TYPE	
①	압착성 개선 치수변경	元	원	'97.9.23	TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE 2/1	PART NO. SEE TABLE
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NAME		
DR. WON. '97.8.04		CHK.		8/12		187 II W/P REC. TERMINAL		
CHK. Chosun.		8/12		APP.				

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK