
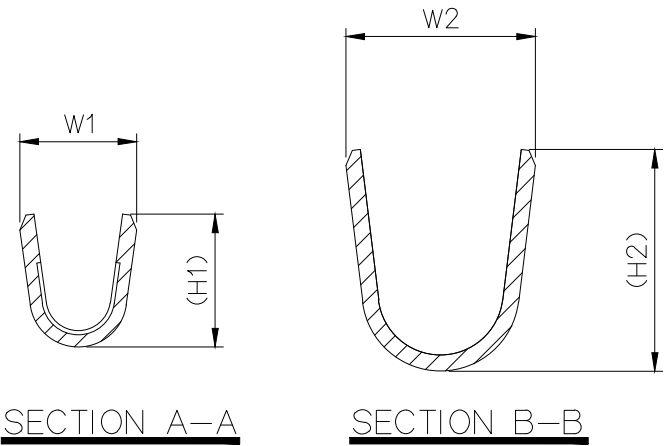
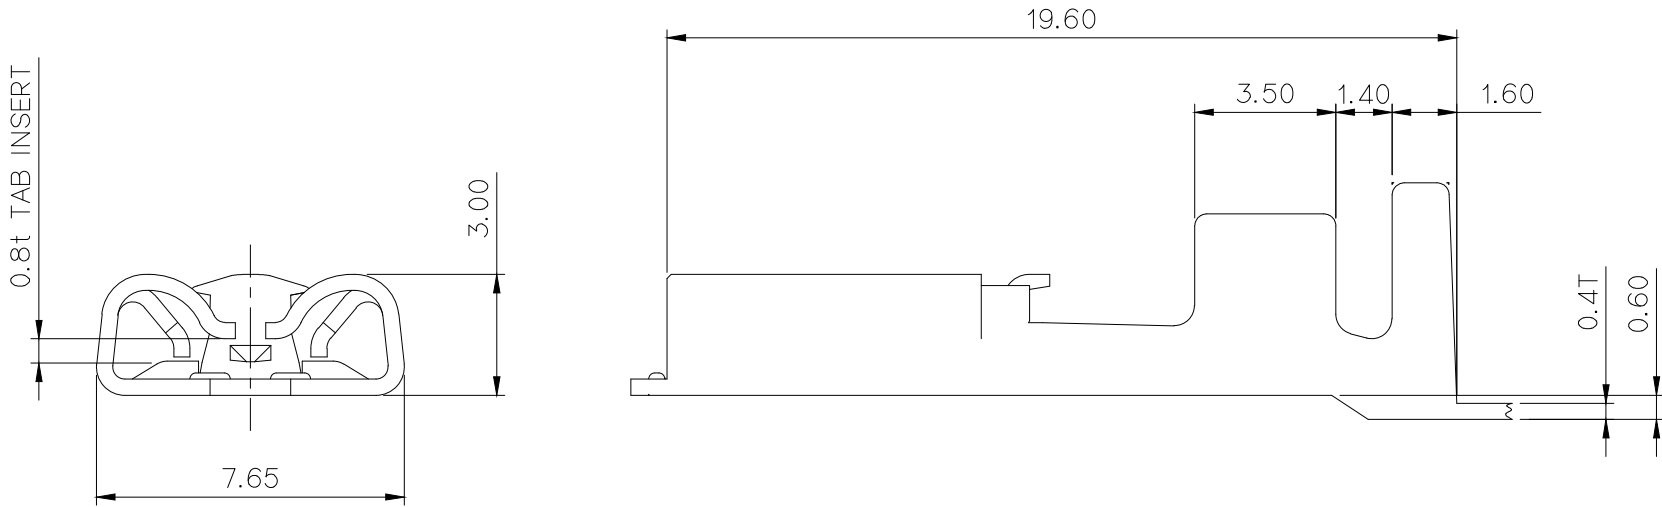


| GENERAL TOLERANCE (TERMINAL) |       |       |       |       |      | USED ON |
|------------------------------|-------|-------|-------|-------|------|---------|
| 5 MAX                        | 10MAX | 20MAX | 45MAX | 45VR  | ( )  |         |
| ±0.20                        | ±0.25 | ±0.30 | ±0.35 | ±0.50 | ±1.0 |         |

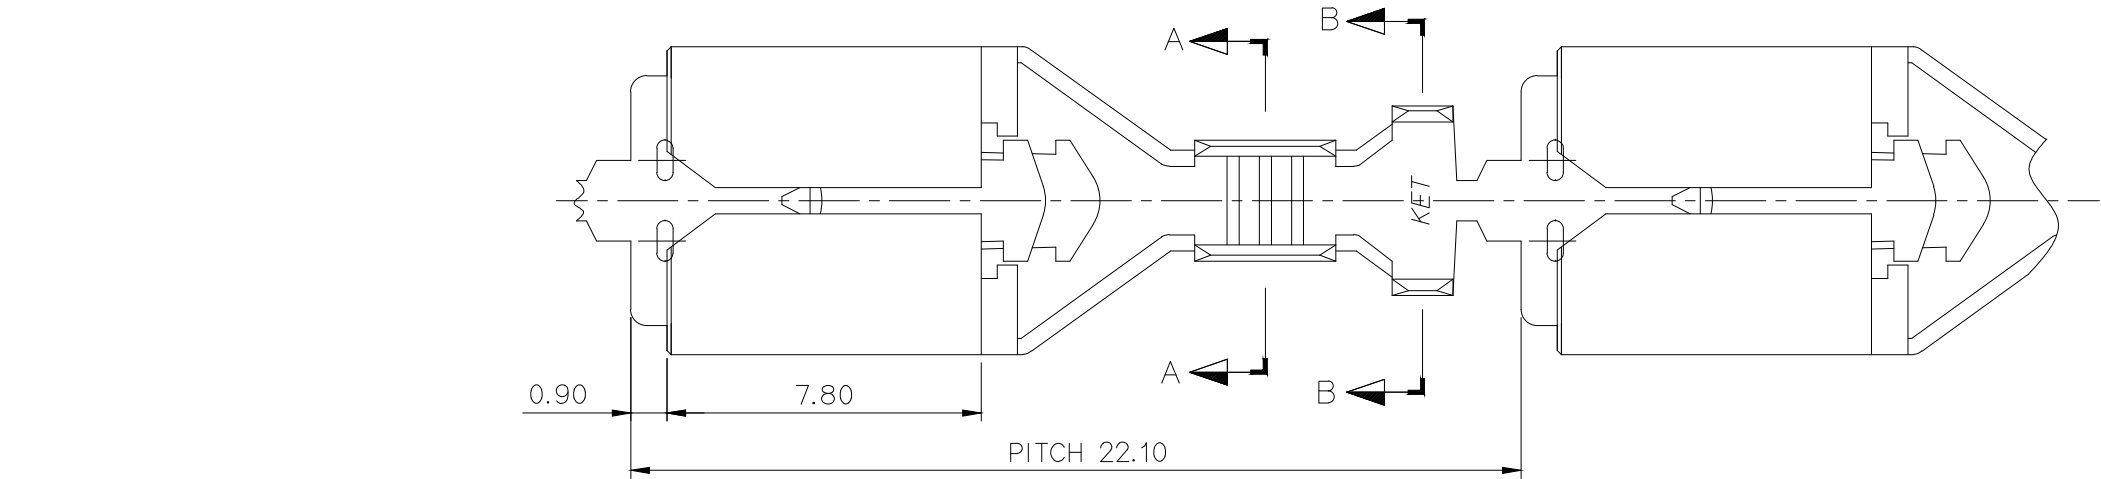

- 주 기
- 지시없는 R은 0.3, C는 0.1로 한다.
  - 기능상 유해한 BURR가 없을것.
  - 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
  - SLEEVE 적용 제품임.
- NOTE
- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3RADIUS, CHAMFER 0.1.
  - MUST BE FREE OF BURR AND IMPERFECTION THAT AFFECT FUNCTION.
  - 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.
  - USE FOR SLEEVE

| NO. | PART NAME              | PART NO.    | W1   | (H1) | W2   | (H2) | WIRE RANGE(mmφ)  | REMARK<외경>    |
|-----|------------------------|-------------|------|------|------|------|------------------|---------------|
| 1   | 250 P-LOCK III TM'L(M) | ST731451-3M | 3.00 | 3.40 | 4.70 | 5.50 | UL1015 #18 - #16 | φ2.80 ~ φ3.10 |

|      |                 |           |      |      |      |                      |                                   |                                                                                                                            |          |
|------|-----------------|-----------|------|------|------|----------------------|-----------------------------------|----------------------------------------------------------------------------------------------------------------------------|----------|
|      |                 |           |      |      |      | MATERIAL BRASS       |                                   |  KOREA ELECTRIC<br>TERMINAL CO., LTD. |          |
|      |                 |           |      |      |      | FINISH PRE-TIN       |                                   |                                                                                                                            |          |
|      |                 |           |      |      |      | WIRE RANGE SEE TABLE |                                   |                                                                                                                            |          |
|      |                 |           |      |      |      | INSULATION SEE TABLE |                                   |                                                                                                                            |          |
| LTR  | REVISION RECORD |           | DR.  | CHK. | APP. | DATE                 | TOLERANCE EXCEPT AS NOTED         | SCALE 5/1                                                                                                                  | PART NO. |
|      | PSH             | '17.01.12 | CHK. | KSH  |      | '17.01.12            | SEE TABLE                         |                                                                                                                            | ST731451 |
| CHK. |                 |           | APP. | BUC  |      | '17.01.12            | PART NAME 250 P-LOCK III TERMINAL |                                                                                                                            |          |

APPROVED

2019-11-06

KOREA ELECTRIC  
TERMINAL CO., LTD.  
Electronic Product Development Team

ISSUE MARK