

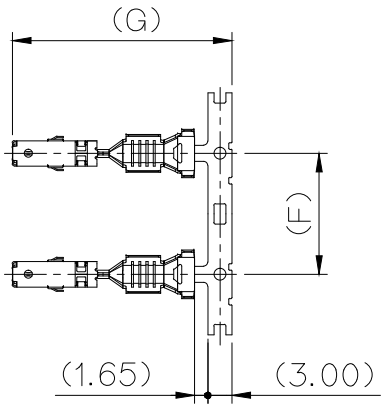
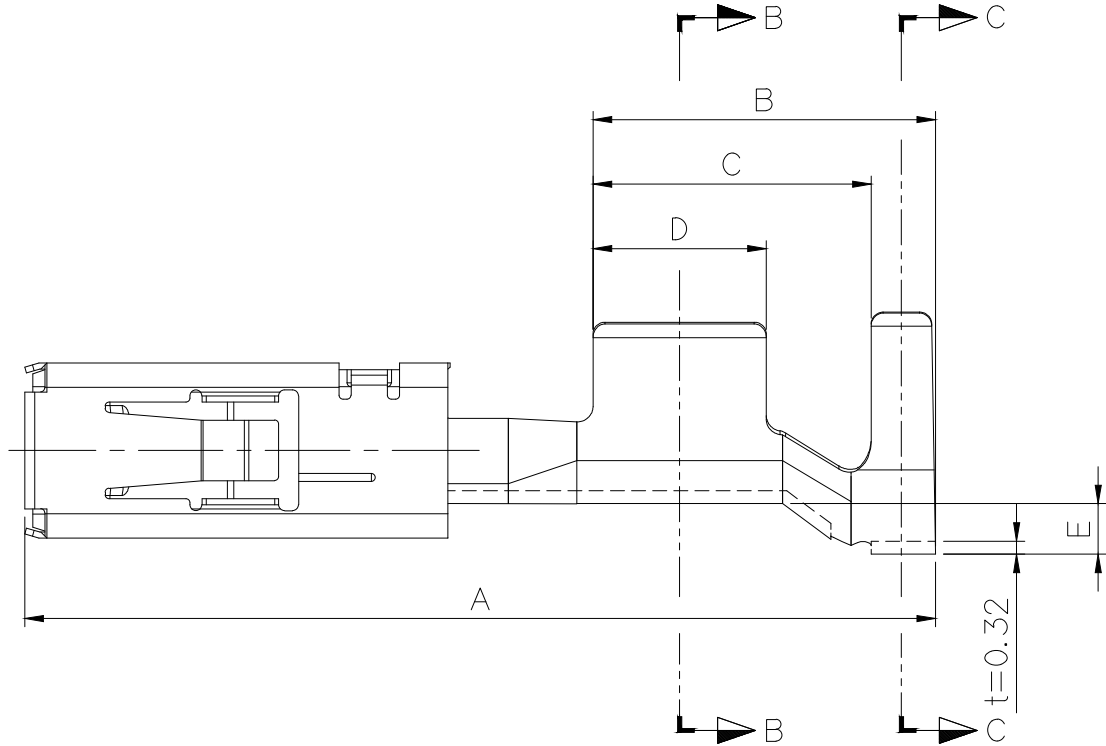

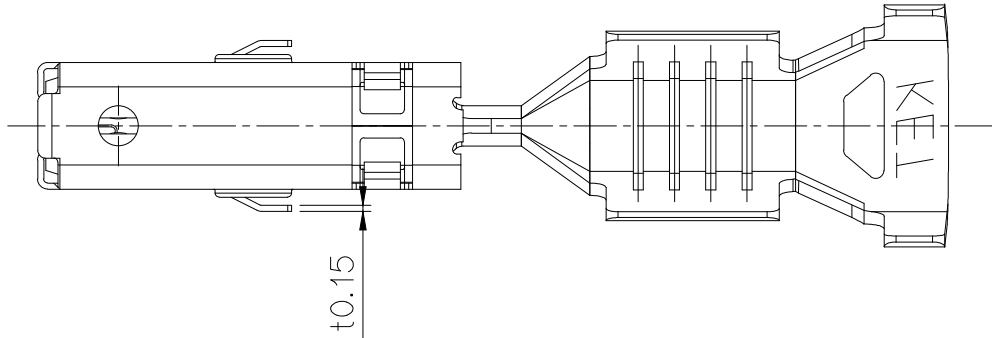


NO.	PART NO.	PART NAME	WIRE RANGE	INSULATION RANGE	A	B	C	D	E	F	WIRE BARREL			INSULATION BARREL			WIRE SEAL	DUMMY SEAL
											WR	WH	WW	IR	IH	IW		
1	ST731456-3	N110 WP FEMALE TERMINAL(XL)	AEXF3.0, FLR2X-B4.0	3.4-3.8	23.00	8.50	6.90	4.30	1.25	15.0	1.50	4.70	4.50	2.47	6.00	6.00	MG685541	MG685542
2	ST731472-3	N110 WP FEMALE TERMINAL(L)	AEXF2.0, AESSXF2.0 AESSXF2.5, FLR2X-B2.5	2.6-3.2	21.00	7.50	5.90	3.50	0.75	15.0	1.17	3.80	3.60	2.07	5.00	5.00	MG685549	

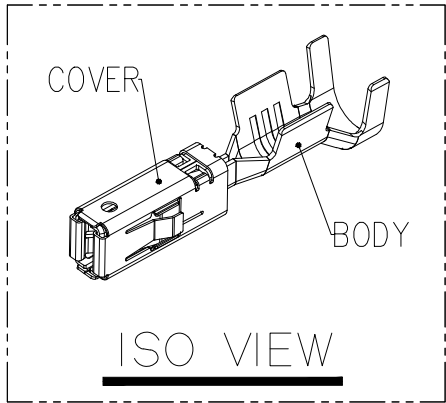

N110 WP FEMALE TML
(SCALE 1:1)

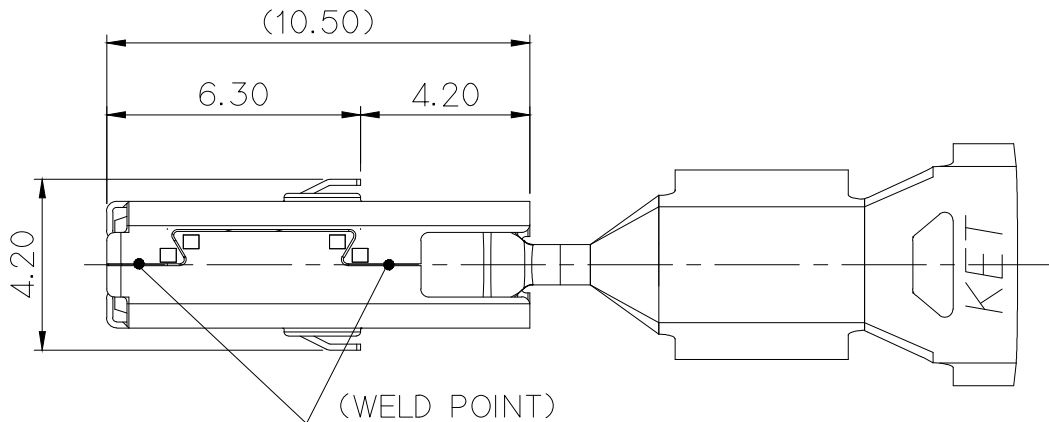


주 기


- 지시없는 R은 0.1, C는 0.1로 한다.
- 기능상 유해한 BURR 및 CRACK 등이 없을 것.
- 적용 MALE TERMINAL : ST741396-3, ST741403-3
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.1 RADIUS, CHAMFER 0.1.
- MUST BE FREE OF BURR, CRACK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE MALE TERMINAL : ST741396-3, ST741403-3
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.



SECTION B-B

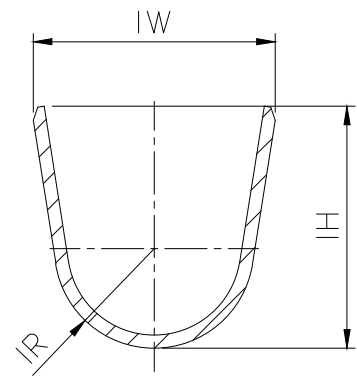

SECTION C-C

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK



KOREA ELECTRIC
TERMINAL CO., LTD.

					<i>MATERIAL</i>	Body:Copper Alloy Cover:STS	 KOREA ELECTRIC TERMINAL CO., LTD.		
					<i>FINISH</i>	Body:Pre-Tin Cover:None			
					<i>WIRE RANGE</i>	SEE TABLE		<i>CLASS</i>	110(280)
					<i>INSULATION</i>	SEE TABLE		<i>TYPE</i>	WP
	Release	HJE	SUK	18.05.30	<i>TOLERANCE EXCEPT AS NOTED</i>	SEE TABLE	<i>SCALE</i> 5/1	<i>PART NO.</i>	SEE TABLE
<i>LTR</i>	<i>REVISION RECORD</i>		<i>DR.</i>	<i>CHK.</i>	<i>APP.</i>	<i>DATE</i>			
<i>DR.</i>	HJE, 17.06.12		<i>CHK.</i>	CMS, 17.06.12					
<i>CHK.</i>			<i>APP.</i>	LJE, 17.06.12					
<i>PART NAME</i>									
N110 WP FEMALE TERMINAL									