

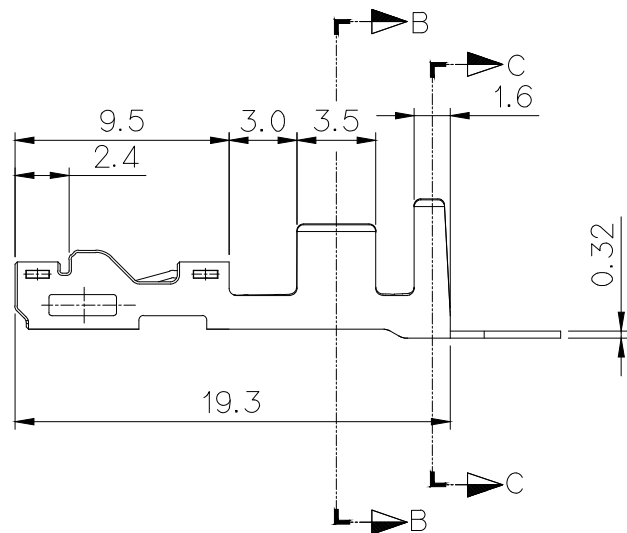
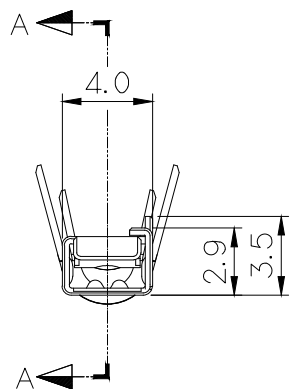
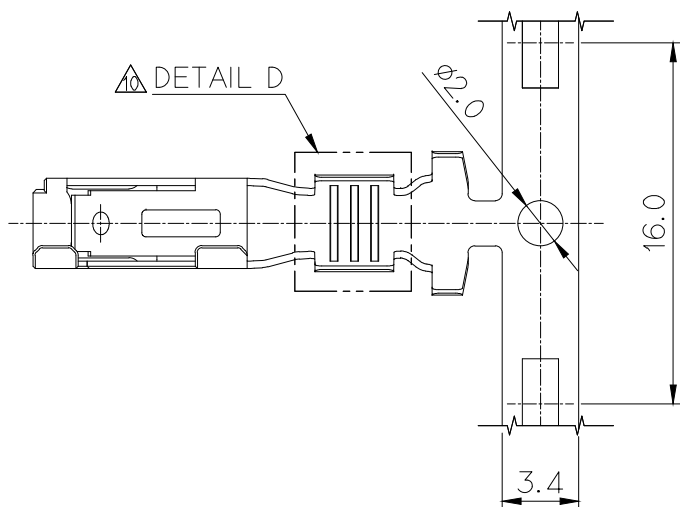



PART NO. SEE NOTE

CUSTOMER DRAWING

DIMENSIONS IN (MM)

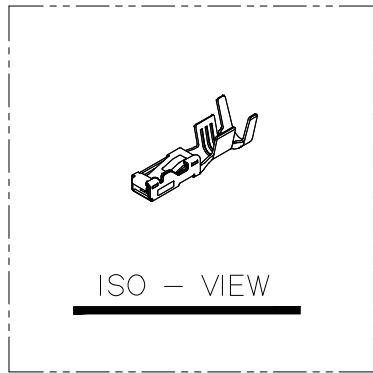

DETAIL D
ST731480-3
ST731481-3
ST731494-3

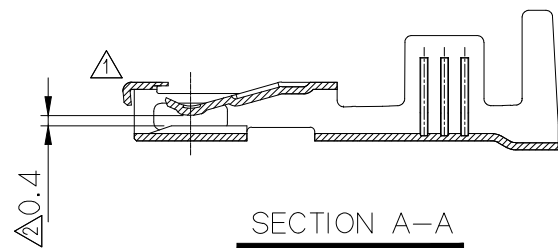

PART NO.	BARREL	WIRE RANGE	WIRE BARREL			INSULATION BARREL		
			W1	H1	W/R	W2	H2	I/R
ST731465-3		CIVUS0.35, CIVUS 0.5	2.3	2.3	0.75	2.5	2.5	0.9
ST731279-3		AVSS 0.3 - 0.5	2.9	2.4	0.9	3.5	3.7	1.3
ST731481-3		FLALUY 0.75	3.0	3.3	1.2	4.5	4.6	1.6
ST731480-3		FLALUY 1.25	3.1	3.6	1.2	4.5	4.6	1.6
ST731280-3		AVSS 0.85 - 1.25 AVSSXF 1.0, 1.5	4.4	4.6	1.5	6.5	6.1	2.1
ST731494-3		FLALRY2.0	4.55	4.9	1.5	6.5	6.1	2.1
ST731281-3		AVSS 2.0, AVS 3.0						
ST731520-3		FLRY-B 4.0						


ECO-1909-108	근거 도면 수정	JKH	HJE	CKY	19.09.23
ECO-1903-184	일부미봉 세레이션 형상 CU도면 추가	JKH	HJE	CKY	19.03.14
ECO-1902-300	오기입 품번 수정	JKH	HJE	CKY	19.02.26
ECO-1811-414	ECO-1902-300 근거 도면 작성	LJH	HJE	LSY	18.11.26
ECO-1811-414	FLRY-B 4.0Sg 전선전용 Modify 개발				
ECO-1811-414	FLRY-B 4.0Sg 전선전용 Modify 개발				
ECO-1811-414	FLRY-B 4.0Sg 전선전용 Modify 개발				
ECO-1811-414	FLRY-B 4.0Sg 전선전용 Modify 개발				
ECO-1811-414	FLRY-B 4.0Sg 전선전용 Modify 개발				
ECO-1811-414	FLRY-B 4.0Sg 전선전용 Modify 개발				

주 기


- 지시없는 C,R=0.30으로 한다.
- 기능상 유해한 흠,변형 및 BURR가 없을것.
- 적용 상대 MALE TERMINAL : ST741285-3, ST741286-3, ST741287-3
ST741407-3, ST741408-3, ST741418-3
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE MALE TERMINAL : ST741285-3, ST741286-3, ST741287-3
ST741407-3, ST741408-3, ST741418-3
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHOULD NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.



SECTION B-B



SECTION C-C

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

ECO-1805-109	근거 도면 작성	PMH	LSY	SUK	18.06.18
ECO-1801-479	AI전선전용 Modify 추가개발	HJE	LSY	SUK	18.02.08
ECO-1712-053	AI전선전용 Modify 추가개발	HJE	WSW	CMS	05.DEC.17
ECO-1708-164	AI전선전용 Modify 개발	HJE	CMS	LJE	10.AUG.17
ECO-1303-105	근거 제품도 변경	KSJ	HEM	HSJ	18.MAR.'13
ECO-1302-114	근거 제품도 변경	KJS	HEM	HSJ	14.FEB.'13
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE
DR.	LKM	2010.04.26	CHK.		
CHK.	LDG		APP.	BHS	

MATERIAL	COPPER ALLOY	KOREA ELECTRIC TERMINAL CO., LTD.
FINISH	PRE-TIN	
WIRE RANGE	SEE TABLE	CLASS 280
INSULATION	SEE TABLE	TYPE
TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 3/1
PART NAME	280(110) FEMALE TERMINAL	

ISSUE MARK