
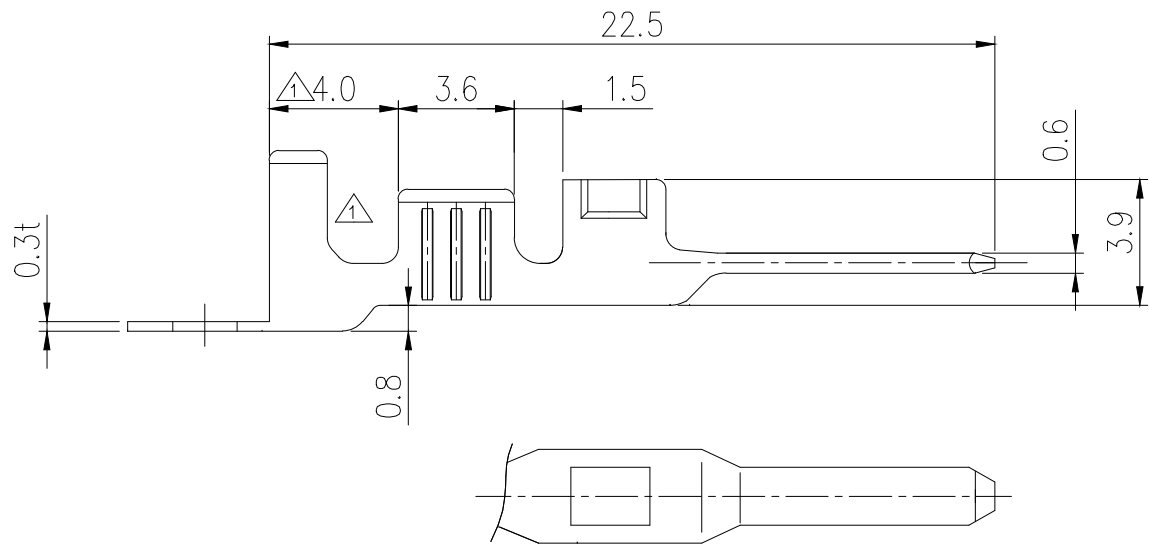
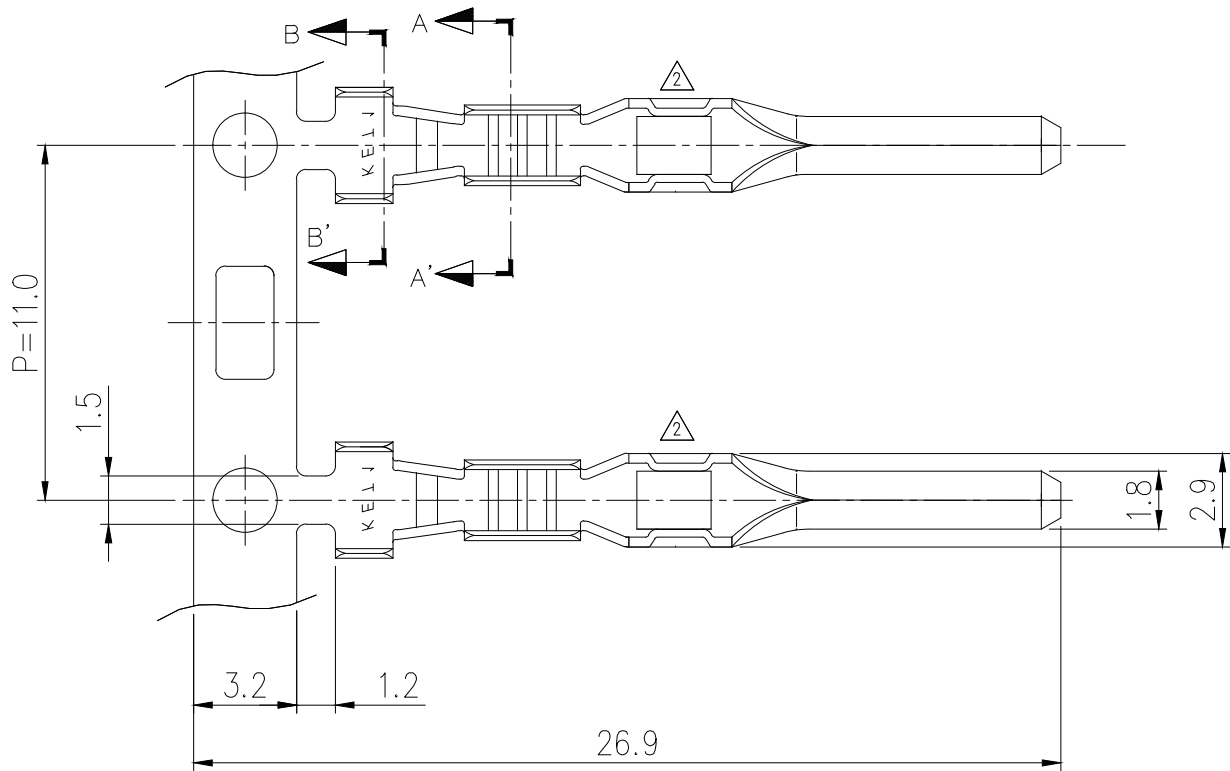


SEC A-A



SEC B-B

GENERAL TOLERANCE (TERMINAL)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

BARREL PART NO.	WIRE RANGE		WIRE BARREL		INSULATION BARREL		INSULATION O.D
	AWG #	(mm ²)	W/W	W/H	I/W	I/H	VSF WIRE(mm)
ST740690-3	22-20	0.3-0.5	2.5	2.4	4.0	4.0	1.8-2.5
ST740691-3	20-18	0.5-0.75	2.8	2.8	4.2	4.2	2.5-2.7

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

주 기

- 기능상 유해한 흠, 변형 및 BURR 등이 없을 것
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

APPROVED

2016-03-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

					MATERIAL BRASS		 KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH PRE-TIN				
					WIRE RANGE SEE TABLE		CLASS		
					INSULATION SEE TABLE		TYPE		
	ECO-1206-092큰거 도면 재작성	KSJ			'12.06.27				
	ECO-1110-203큰거 도면 재작성	PJM			'11.11.24				
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 4/1	PART NO. ST740690-3 / 691-3
DR.	PJM	'11. 10. 31	CHK.		10/31	PART NAME 1806 D/L TAB TM'L (S)(M)			
CHK.			APP.		10/31				