

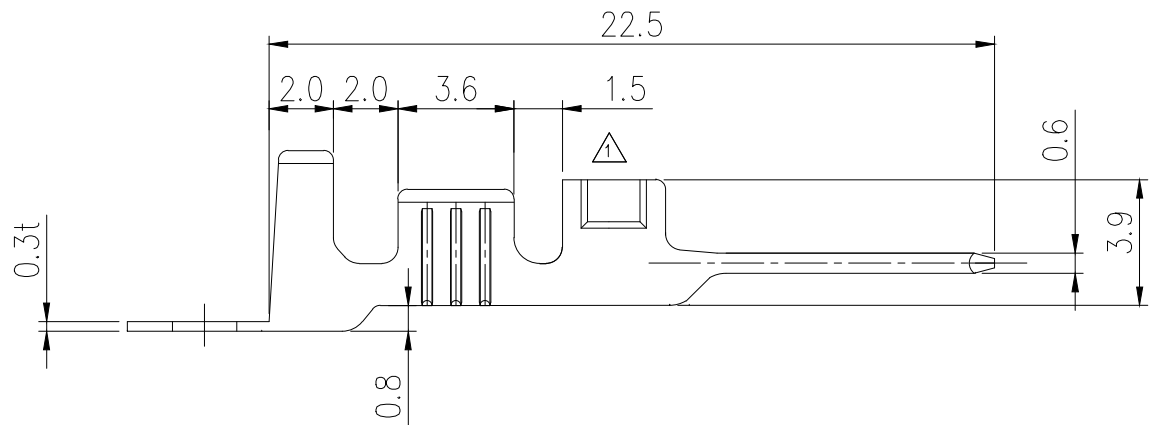
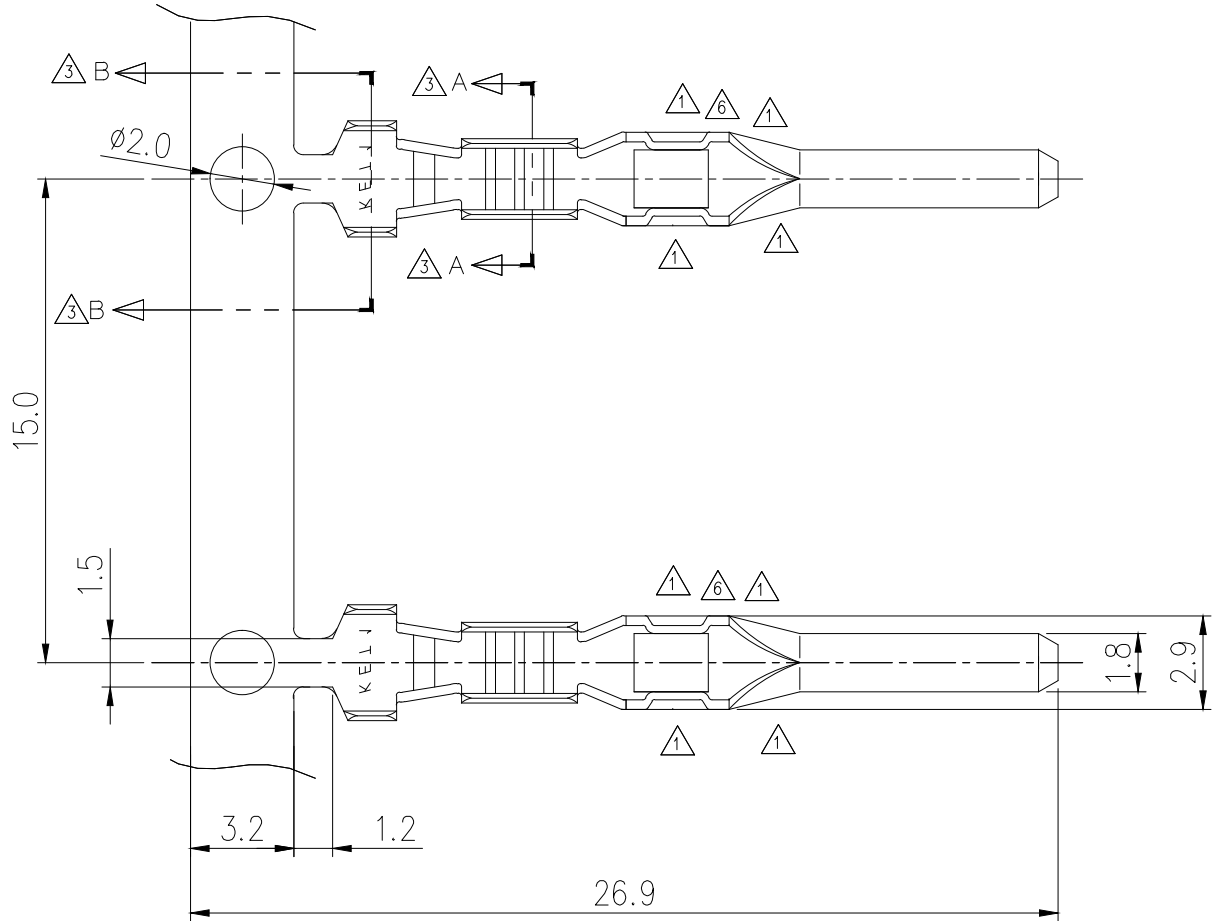


SEC A-A



SEC B-B



SEC B-B

(ST740693 I/B)

GENERAL TOLERANCE (TERMINAL)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

BARREL PART NO.	WIRE RANGE		WIRE BARREL		INSULATION BARREL		INSULATION O.D VSF WIRE(mm)
	AWG #	(mm ²)	W/W	W/H	I/W	I/H	
ST740692-3	16-14	1.25-2.0	3.7	3.6	5.0	5.3	3.1-3.4
ST740693-3	0.5+0.5 0.75+0.75	0.5+0.5 0.5+0.75 0.75+0.75	3.8	3.6	6.6	5.0	2.5+2.5 2.7+2.7
ST740871-3	26-24	0.13-0.22	2.0	2.1	3.4	3.5	—

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

주 기

- 기능상 유해한 흠, 변형 및 BURR 등이 없을 것
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

△6	ECO-1206-092의거 도면 재작성	KSJ	<i>[Signature]</i>	<i>[Signature]</i>	'12.06.27			ISSUE MARK	
△5	ECO-1110-198의거 도면 재작성	PJM	<i>[Signature]</i>	<i>[Signature]</i>	'11.10.31	MATERIAL BRASS			KOREA ELECTRIC TERMINAL CO., LTD.
△4	설계사양변경(S110128)근거 도면 재작성	KSJ	<i>[Signature]</i>	<i>[Signature]</i>	'11.04.27	FINISH PRE-TIN			
△3	오기수정 (2곳)	PJM	<i>[Signature]</i>		'08.07.25	WIRE RANGE SEE TABLE		CLASS	MULTI
△2	PART NO. 추가	KO	<i>[Signature]</i>		'00.07.24	INSULATION SEE TABLE		TYPE	
△1	도면수정	HEE	<i>[Signature]</i>		'98.09.04				
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 4/1	PART NO.	△△
DR.	KO '96.07.23	CHK.	<i>[Signature]</i>	<i>[Signature]</i>	07/25	SEE TABLE		ST740692,693,871	
CHK.	<i>S. w k e r</i>	APP.	<i>[Signature]</i>		07/25	PART NAME △△ 1806 D/L TAB TM'L (L)(XL)(SS)			

APPROVED

2016-03-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

